



THERMAL ENGINEERING

CONTENTS

Unit-I : Gas Power Cycles

- [The Otto Cycle](#)
- [Diesel Cycle](#)
- [The Dual Cycle](#)
- [The Brayton Cycle](#)
- [Actual PV diagram of four stroke engine](#)
- [Theoretical PV diagram for four stroke engine](#)
- [Theoretical and Actual PV diagram of Two stroke Petrol Engine](#)
- [Sample Problems](#)

Unit-II: Internal combustion Engines

- [Classification of IC engine](#)
- [Components of I.C engine](#)
- [Theoretical valve timing diagram of four stroke engine](#)
- [Actual valve timing diagram of four stroke engine](#)
- [Theoretical port timing diagram of two stroke engine](#)
- [Comparison of two stroke and four stroke engine](#)
- [Comparison of petrol and diesel engine](#)
- [Simple Carburetor](#)
- [Diesel Pump and Injector system](#)
- [Diesel knocking and detonation](#)
- [Ignition System](#)
- [Lubrication System](#)
- [Cooling System](#)
- [Performance Calculation](#)
- [Emission Formation Mechanisms \(S.I\)](#)
- [Emission Formation in C.I. Engine](#)
- [Sample Problem](#)

Unit-III: Steam Nozzles and Turbines

- [Flow of steam through nozzles](#)
- [Continuity and steady flow energy equations](#)
- [Types of Nozzles](#)
- [Supersaturated flow or Metastable flow in Nozzles](#)
- [Critical Pressure Ratio](#)
- [Effect of Friction on Nozzles](#)
- [Velocity of steam at nozzle exit](#)
- [Mass of steam discharged through a nozzle](#)
- [Condition for maximum discharge through nozzle](#)
- [Values for maximum discharge](#)
- [Steam turbines](#)
- [Impulse and Reaction Turbines](#)
- [Compounding of impulse turbine](#)
- [Velocity diagram of an impulse turbine](#)
- [Velocity diagram of the velocity compounded turbines](#)
- [Reaction Turbine](#)
- [Governing of Steam Turbine](#)
- [Sample Problems on Steam Nozzle](#)
- [Sample problems on Steam Turbine](#)

Unit-IV: Air Compressors

- [Classification of compressors](#)
- [Positive Displacement compressors](#)
- [Non-Positive displacement compressors or Dynamic compressor](#)
- [Multistage Compression](#)
- [Work done in a single stage reciprocating compressor without clearance volume](#)
- [Work done in a single stage reciprocating compressor with clearance volume](#)
- [Volumetric Efficiency](#)

- [Mathematical analysis of multistage compressor is done with following assumptions](#)
- [Minimum work required in two stage compressor](#)
- [Sample Problems](#)

[Unit-V:Refrigeration and Air-Conditioning System](#)

- [Vapour Compression Refrigeration Cycle](#)
- [Sub cooling or Under cooling](#)
- [Super Heating](#)
- [Refrigerant](#)
- [Properties of Refrigerants](#)
- [Ton of refrigeration](#)
- [Ammonia Water vapour absorption refrigeration system](#)
- [Lithium Bromide-Water vapour absorption refrigeration system](#)
- [Comparison between vapour compression and vapour absorption systems](#)
- [Psychrometry](#)
- [Psychrometric Chart](#)
- [Psychrometric Processes](#)
- [Cooling Load Calculation](#)
- [Concepts of GSHP, RSHP, ESHF](#)
- [Types of Air- Conditioning System](#)
- [Sample Problems](#)

UNIT – I

GAS POWER CYCLES

Syllabus

Otto, Diesel, Dual, Brayton cycles, Calculation of mean effective pressure, and air standard efficiency – Actual and theoretical PV diagram of four stroke and two stroke engines

The Otto Cycle

The Otto cycle, which was first proposed by a Frenchman, Beau de Rochas in 1862, was first used on an engine built by a German, Nicholas A. Otto, in 1876. The cycle is also called a constant volume or explosion cycle. This is the equivalent air cycle for reciprocating piston engines using spark ignition. Figures 1 and 2 show the P-V and T-s diagrams respectively.

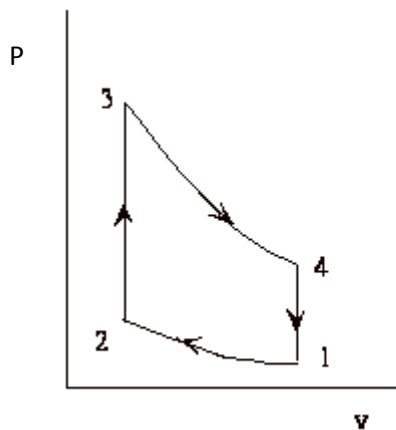


Fig.1: P-V Diagram of Otto Cycle.

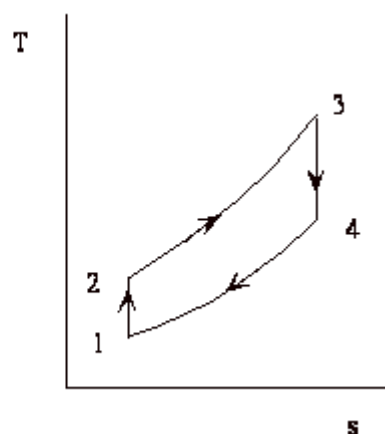


Fig.2: T-S Diagram of Otto Cycle.

At the start of the cycle, the cylinder contains a mass M of air at the pressure and volume indicated at point 1. The piston is at its lowest position. It moves upward and the gas is compressed isentropically to point 2. At this point, heat is added at constant volume which raises the pressure to point 3. The high pressure charge now expands isentropically, pushing the piston down on its expansion stroke to point 4 where the charge rejects heat at constant volume to the initial state, point 1.

The isothermal heat addition and rejection of the Carnot cycle are replaced by the constant volume processes which are, theoretically more plausible, although in practice, even these processes are not practicable.

The heat supplied, Q_s , per unit mass of charge, is given by

$$c_v(T_3 - T_2) \quad (1)$$

the heat rejected, Q_r per unit mass of charge is given by

$$c_v(T_4 - T_1) \quad (2)$$

and the thermal efficiency is given by

$$\begin{aligned} \eta_{th} &= 1 - \frac{(T_4 - T_1)}{(T_3 - T_2)} \\ &= 1 - \frac{T_1}{T_2} \left\{ \frac{\left(\frac{T_4}{T_1} - 1 \right)}{\left(\frac{T_3}{T_2} - 1 \right)} \right\} \quad (3) \end{aligned}$$

$$\text{Now } \frac{T_1}{T_2} = \left(\frac{V_2}{V_1} \right)^{\gamma-1} = \left(\frac{V_3}{V_4} \right)^{\gamma-1} = \frac{T_4}{T_3}$$

$$\text{And since } \frac{T_1}{T_2} = \frac{T_4}{T_3} \quad \text{we have} \quad \frac{T_4}{T_1} = \frac{T_3}{T_2}$$

Hence, substituting in Eq. 3, we get, assuming that r is the compression ratio V_1/V_2

$$\begin{aligned} \eta_{th} &= 1 - \frac{T_1}{T_2} \\ &= 1 - \left(\frac{V_2}{V_1} \right)^{\gamma-1} \\ &= 1 - \frac{1}{r^{\gamma-1}} \quad (4) \end{aligned}$$

In a true thermodynamic cycle, the term expansion ratio and compression ratio are synonymous. However, in a real engine, these two ratios need not be equal because of the valve timing and therefore the term expansion ratio is preferred sometimes.

Equation 4 shows that the thermal efficiency of the theoretical Otto cycle increases with increase in compression ratio and specific heat ratio but is independent of the heat added (independent of load) and initial conditions of pressure, volume and temperature.

Figure 3 shows a plot of thermal efficiency versus compression ratio for an Otto cycle. It is seen that the increase in efficiency is significant at lower compression ratios. This is also seen in Table 1 given below.

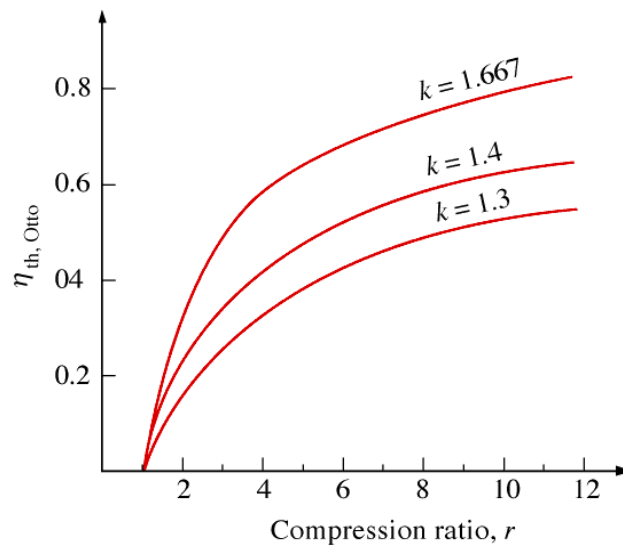


Fig.3: variation of efficiency with compression ratio

Table1: compression ratio and corresponding thermal efficiency for Otto cycle

R	η
1	0
2	0.242
3	0.356
4	0.426
5	0.475
6	0.512
7	0.541
8	0.565
9	0.585
10	0.602
16	0.67
20	0.698
50	0.791

From the table it is seen that if:

CR is increased from 2 to 4, efficiency increase is 76%

CR is increased from 4 to 8, efficiency increase is only 32.6%

CR is increased from 8 to 16, efficiency increase is only 18.6%

Mean effective pressure and air standard efficiency

It is seen that the air standard efficiency of the Otto cycle depends only on the compression ratio. However, the pressures and temperatures at the various points in the cycle and the net work done, all depend upon the initial pressure and temperature and the heat input from point 2 to point 3, besides the compression ratio.

A quantity of special interest in reciprocating engine analysis is the mean effective pressure. Mathematically, it is the net work done on the piston, W , divided by the piston displacement volume, $V_1 - V_2$. This quantity has the units of pressure. Physically, it is that constant pressure which, if exerted on the piston for the whole outward stroke, would yield work equal to the work of the cycle. It is given by

$$mep = \frac{W}{V_1 - V_2}$$

$$= \frac{\eta Q_{2-3}}{V_1 - V_2} \quad (5)$$

where Q_{2-3} is the heat added from points 2 to 3.

Work done per kg of air

$$W = \frac{P_3 V_3 - P_4 V_4}{\nu - 1} - \frac{P_2 V_2 - P_1 V_1}{\nu - 1} = mep V_s = P_m (V_1 - V_2)$$

$$mep = \frac{1}{(V_1 - V_2)} \left[\frac{P_3 V_3 - P_4 V_4}{\nu - 1} - \frac{P_2 V_2 - P_1 V_1}{\nu - 1} \right] \quad (5A)$$

The pressure ratio P_3/P_2 is known as explosion ratio r_p

$$\frac{P_2}{P_1} = \left(\frac{V_1}{V_2} \right)^\nu = r^\nu \Rightarrow P_2 = P_1 r^\nu,$$

$$P_3 = P_2 r_p = P_1 r^\nu r_p,$$

$$P_4 = P_3 \left(\frac{V_3}{V_4} \right)^\nu = P_1 r^\nu r_p \left(\frac{V_2}{V_1} \right)^\nu = P_1 r_p$$

$$\frac{V_1}{V_2} = \frac{V_c + V_s}{V_c} = r$$

$$\therefore V_s = V_c(r-1)$$

Substituting the above values in Eq 5A

$$mep = P_1 \frac{r(r_p - 1)(r^{\gamma-1} - 1)}{(r-1)(\gamma-1)}, \quad \text{Now}$$

$$\begin{aligned} V_1 - V_2 &= V_1 \left(1 - \frac{V_2}{V_1} \right) \\ &= V_1 \left(1 - \frac{1}{r} \right) \end{aligned} \quad (6)$$

Here r is the compression ratio, V_1/V_2

From the equation of state:

$$V_1 = M \frac{R_0}{m} \frac{T_1}{p_1} \quad (7)$$

R_0 is the universal gas constant

Substituting for V_1 and for $V_1 - V_2$,

$$mep = \eta \frac{Q_{2-3} \frac{p_1 m}{MR_0 T_1}}{1 - \frac{1}{r}} \quad (8)$$

The quantity Q_{2-3}/M is the heat added between points 2 and 3 per unit mass of air (M is the mass of air and m is the molecular weight of air); and is denoted by Q' , thus

$$mep = \eta \frac{Q' \frac{p_1 m}{R_0 T_1}}{1 - \frac{1}{r}} \quad (9)$$

We can non-dimensionalize the mep by dividing it by p_1 so that we can obtain the following equation

$$\frac{mep}{p_1} = \eta \left[\frac{1}{1 - \frac{1}{r}} \right] \left[\frac{Q' m}{R_0 T_1} \right] \quad (10)$$

Since $\frac{R_0}{m} = c_v (\gamma - 1)$, we can substitute it in Eq. 25 to get

$$\frac{mep}{p_1} = \eta \frac{Q'}{c_v T_1} \frac{1}{\left[1 - \frac{1}{r} \right] [\gamma - 1]} \quad (11)$$

The dimensionless quantity mep/p_1 is a function of the heat added, initial temperature, compression ratio and the properties of air, namely, c_v and γ . We see that the mean effective pressure is directly proportional to the heat added and inversely proportional to the initial (or ambient) temperature.

We can substitute the value of η from Eq. 8 in Eq. 14 and obtain the value of mep/p_1 for the Otto cycle in terms of the compression ratio and heat added.

In terms of the pressure ratio, p_3/p_2 denoted by r_p we could obtain the value of mep/p_1 as follows:

$$\frac{mep}{p_1} = \frac{r(r_p - 1)(r^{\gamma-1} - 1)}{(r - 1)(\gamma - 1)} \quad (12)$$

We can obtain a value of r_p in terms of Q' as follows:

$$r_p = \frac{Q'}{c_v T_1 r^{\gamma-1}} + 1 \quad (13)$$

Choice of Q'

We have said that

$$Q' = \frac{Q_{2-3}}{M} \quad (14)$$

M is the mass of charge (air) per cycle, kg.

Now, in an actual engine

$$\begin{aligned} Q_{2-3} &= M_f Q_c \\ &= FM_a Q_c \text{ in kJ/cycle} \end{aligned} \quad (15)$$

M_f is the mass of fuel supplied per cycle, kg

Q_c is the heating value of the fuel, Kj/kg

M_a is the mass of air taken in per cycle

F is the fuel air ratio = M_f/M_a

Substituting

$$Q' = \frac{FM_a Q_c}{M} \quad (16)$$

$$\text{Now } \frac{M_a}{M} \approx \frac{V_1 - V_2}{V_1}$$

$$\text{And } \frac{V_1 - V_2}{V_1} = 1 - \frac{1}{r} \quad (17)$$

So, substituting for M_a/M

$$Q' = FQ_c \left(1 - \frac{1}{r} \right) \quad (18)$$

For isooctane, FQ_c at stoichiometric conditions is equal to 2975 Kj/kg, thus

$$Q' = 2975(r - 1)/r \quad (19)$$

At an ambient temperature, T_1 of 300K and c_v for air is assumed to be 0.718 Kj/kgK, we get a value of $Q'/c_v T_1 = 13.8(r - 1)/r$.

Under fuel rich conditions, $\phi = 1.2$, $Q'/c_v T_1 = 16.6(r - 1)/r$ (20)

Under fuel lean conditions, $\phi = 0.8$, $Q'/c_v T_1 = 11.1(r - 1)/r$ (21)

Diesel Cycle

This cycle, proposed by a German engineer, Dr. Rudolph Diesel to describe the processes of his engine, is also called the constant pressure cycle. This is believed to be the equivalent air cycle for the reciprocating slow speed compression ignition engine. The P-V and T-s diagrams are shown in Figs 4 and 5 respectively.

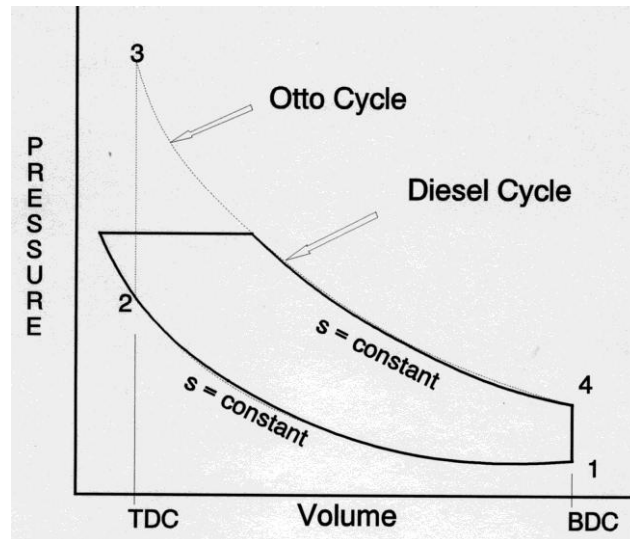


Fig.4: P-V Diagram of Diesel Cycle.

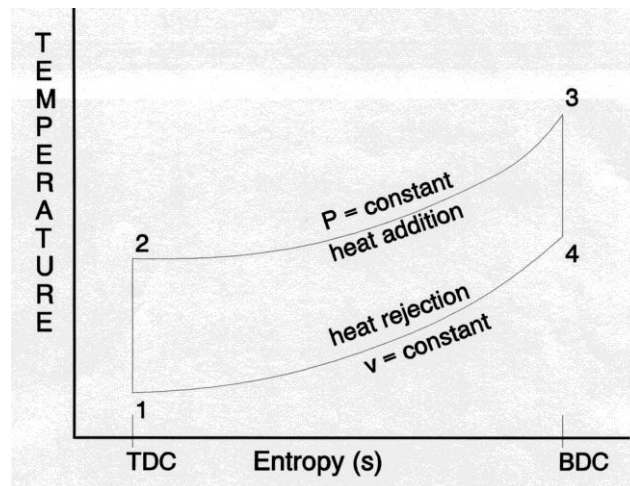


Fig.5: T-S Diagram of Diesel Cycle.

The cycle has processes which are the same as that of the Otto cycle except that the heat is added at constant pressure.

The heat supplied, Q_s is given by

$$c_p(T_3 - T_2) \quad (22)$$

whereas the heat rejected, Q_r is given by

$$c_v(T_4 - T_1) \quad (23)$$

and the thermal efficiency is given by

$$\begin{aligned} \eta_{th} &= 1 - \frac{c_v(T_4 - T_1)}{c_p(T_3 - T_2)} \\ &= 1 - \frac{1}{\gamma} \left\{ \frac{T_1 \left(\frac{T_4}{T_1} - 1 \right)}{T_2 \left(\frac{T_3}{T_2} - 1 \right)} \right\} \quad (24) \end{aligned}$$

From the T-s diagram, Fig. 5, the difference in enthalpy between points 2 and 3 is the same as that between 4 and 1, thus

$$\begin{aligned} \Delta s_{2-3} &= \Delta s_{4-1} \\ \therefore c_v \ln \left(\frac{T_4}{T_1} \right) &= c_p \ln \left(\frac{T_3}{T_2} \right) \\ \therefore \ln \left(\frac{T_4}{T_1} \right) &= \gamma \ln \left(\frac{T_3}{T_2} \right) \\ \therefore \frac{T_4}{T_1} &= \left(\frac{T_3}{T_2} \right)^\gamma \quad \text{and} \quad \frac{T_1}{T_2} = \left(\frac{V_2}{V_1} \right)^{\gamma-1} = \frac{1}{r^{\gamma-1}} \end{aligned}$$

Substituting in eq. 24, we get

$$\eta_{th} = 1 - \frac{1}{\gamma} \left(\frac{1}{r} \right)^{\gamma-1} \left[\frac{\left(\frac{T_3}{T_2} \right)^\gamma - 1}{\frac{T_3}{T_2} - 1} \right] \quad (25)$$

$$\text{Now } \frac{T_3}{T_2} = \frac{V_3}{V_2} = r_c = \text{cut-off ratio}$$

$$\eta = 1 - \frac{1}{r^{\gamma-1}} \left[\frac{r_c^\gamma - 1}{\gamma(r_c - 1)} \right] \quad (26)$$

When Eq. 26 is compared with Eq. 8, it is seen that the expressions are similar except for the term in the parentheses for the Diesel cycle. It can be shown that this term is always greater than unity.

$$\text{Now } r_c = \frac{V_3}{V_2} = \frac{V_3}{V_4} \cdot \frac{V_4}{V_1} = \frac{r}{r_e} \text{ where } r \text{ is the compression ratio and } r_e \text{ is the expansion ratio}$$

Thus, the thermal efficiency of the Diesel cycle can be written as

$$\eta = 1 - \frac{1}{r^{\gamma-1}} \left[\frac{\left(\frac{r}{r_e} \right)^\gamma - 1}{\gamma \left(\frac{r}{r_e} - 1 \right)} \right] \quad (27)$$

Let $r_e = r - \Delta$ since r is greater than r_e . Here, Δ is a small quantity. We therefore have

$$\frac{r}{r_e} = \frac{r}{r - \Delta} = \frac{r}{r \left(1 - \frac{\Delta}{r} \right)} = \left(1 - \frac{\Delta}{r} \right)^{-1}$$

We can expand the last term binomially so that

$$\left(1 - \frac{\Delta}{r} \right)^{-1} = 1 + \frac{\Delta}{r} + \frac{\Delta^2}{r^2} + \frac{\Delta^3}{r^3} + \dots$$

$$\text{Also } \left(\frac{r}{r_e} \right)^\gamma = \frac{r^\gamma}{(r - \Delta)^\gamma} = \frac{r^\gamma}{r^\gamma \left(1 - \frac{\Delta}{r} \right)^\gamma} = \left(1 - \frac{\Delta}{r} \right)^{-\gamma}$$

We can expand the last term binomially so that

$$\left(1 - \frac{\Delta}{r} \right)^{-\gamma} = 1 + \gamma \frac{\Delta}{r} + \frac{\gamma(\gamma+1)}{2!} \frac{\Delta^2}{r^2} + \frac{\gamma(\gamma+1)(\gamma+2)}{3!} \frac{\Delta^3}{r^3} + \dots$$

Substituting in Eq. 27, we get

$$\eta = 1 - \frac{1}{r^{\gamma-1}} \left[\frac{\frac{\Delta}{r} + \frac{(\gamma+1)\Delta^2}{2!r^2} + \frac{(\gamma+1)(\gamma+2)\Delta^3}{3!r^3} + \dots}{\frac{\Delta}{r} + \frac{\Delta^2}{r^2} + \frac{\Delta^3}{r^3} + \dots} \right] \quad (28)$$

Since the coefficients of $\frac{\Delta}{r}, \frac{\Delta^2}{r^2}, \frac{\Delta^3}{r^3}$, etc are greater than unity, the quantity in the brackets in Eq. 28 will be greater than unity. Hence, for the Diesel cycle, we subtract $\frac{1}{r^{\gamma-1}}$ times a quantity greater than unity from one, hence for the same r , the Otto cycle efficiency is greater than that for a Diesel cycle.

If $\frac{\Delta}{r}$ is small, the square, cube, etc of this quantity becomes progressively smaller, so the thermal efficiency of the Diesel cycle will tend towards that of the Otto cycle.

From the foregoing we can see the importance of cutting off the fuel supply early in the forward stroke, a condition which, because of the short time available and the high pressures involved, introduces practical difficulties with high speed engines and necessitates very rigid fuel injection gear.

In practice, the diesel engine shows a better efficiency than the Otto cycle engine because the compression of air alone in the former allows a greater compression ratio to be employed. With a mixture of fuel and air, as in practical Otto cycle engines, the maximum temperature developed by compression must not exceed the self ignition temperature of the mixture; hence a definite limit is imposed on the maximum value of the compression ratio.

Thus Otto cycle engines have compression ratios in the range of 7 to 12 while diesel cycle engines have compression ratios in the range of 16 to 22.

$$mep = \frac{1}{V_s} \left[P_2(V_3 - V_2) + \frac{P_3V_3 - P_4V_4}{\gamma - 1} - \frac{P_2V_2 - P_1V_1}{\gamma - 1} \right] \quad (29)$$

The pressure ratio P_3/P_2 is known as explosion ratio r_p

$$\frac{P_2}{P_1} = \left(\frac{V_1}{V_2} \right)^\gamma = r^\gamma \Rightarrow P_2 = P_1 r^\gamma,$$

$$P_3 = P_2 = P_1 r^\gamma$$

$$P_4 = P_3 \left(\frac{V_3}{V_4} \right)^\gamma = P_1 r^\gamma \left(\frac{V_2}{V_1} \right)^\gamma = P_1 r_c^\gamma$$

$$V_4 = V_1, V_2 = V_c,$$

$$\frac{V_1}{V_2} = \frac{V_c + V_s}{V_c} = r$$

$$\therefore V_s = V_c(r-1)$$

Substituting the above values in Eq 29 to get Eq (29A)

In terms of the cut-off ratio, we can obtain another expression for mep/p_1 as follows

$$mep = P_1 \frac{\gamma r^\gamma (r_c - 1) - r(r_c^\gamma - 1)}{(r-1)(\gamma-1)} \quad (29A)$$

We can obtain a value of r_c for a Diesel cycle in terms of Q' as follows:

$$r_c = \frac{Q'}{c_p T_1 r^{\gamma-1}} + 1 \quad (30)$$

We can substitute the value of η from Eq. 38 in Eq. 26, reproduced below and obtain the value of mep/p_1 for the Diesel cycle.

$$\frac{mep}{p_1} = \eta \frac{Q'}{c_v T_1} \frac{1}{\left[1 - \frac{1}{r} \right] [\gamma - 1]}$$

For the Diesel cycle, the expression for mep/p_3 is as follows:

$$\frac{mep}{p_3} = \frac{mep}{p_1} \left(\frac{1}{r^\gamma} \right) \quad (31)$$

Modern high speed diesel engines do not follow the Diesel cycle. The process of heat addition is partly at constant volume and partly at constant pressure. This brings us to the dual cycle.

The Dual Cycle

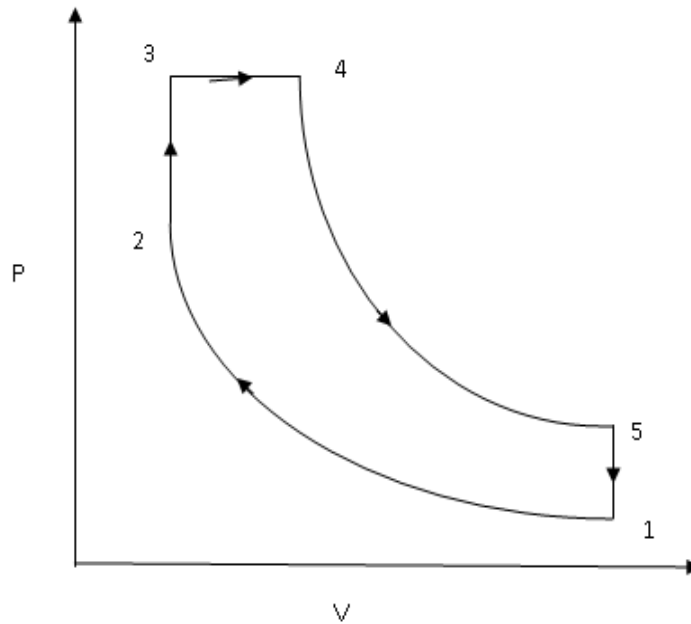


Fig.6: P-V Diagram of Dual Cycle.

Process 1-2: Reversible adiabatic compression.

Process 2-3: Constant volume heat addition.

Process 3-4: Constant pressure heat addition.

Process 4-5: Reversible adiabatic expansion.

Process 5-1: Constant volume heat reject

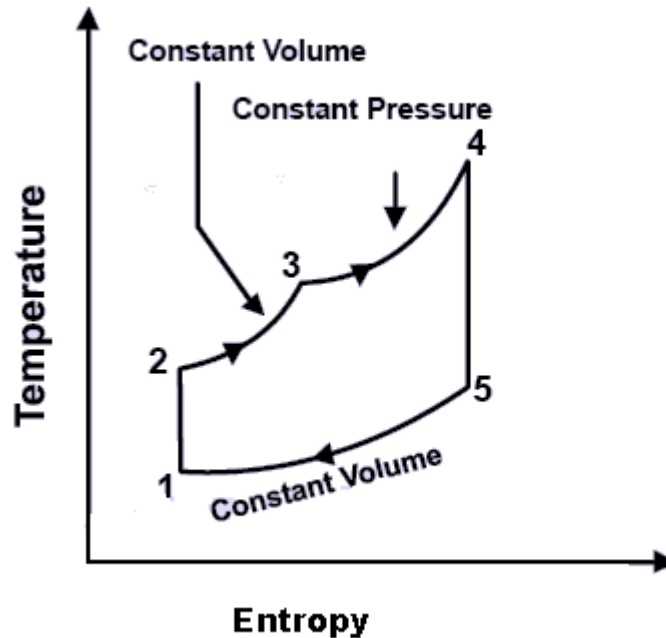


Fig.7: T-S Diagram of Carnot Cycle.

The cycle is the equivalent air cycle for reciprocating high speed compression ignition engines. The P-V and T-s diagrams are shown in Figs.6 and 7. In the cycle, compression and expansion processes are isentropic; heat addition is partly at constant volume and partly at constant pressure while heat rejection is at constant volume as in the case of the Otto and Diesel cycles.

The heat supplied, Q_s per unit mass of charge is given by

$$c_v(T_3 - T_2) + c_p(T_3' - T_2) \quad (32)$$

whereas the heat rejected, Q_r per unit mass of charge is given by

$$c_v(T_4 - T_1)$$

and the thermal efficiency is given by

$$\eta_{th} = 1 - \frac{c_v(T_4 - T_1)}{c_v(T_3 - T_2) + c_p(T_{3'} - T_2)} \quad (33A)$$

$$= 1 - \left\{ \frac{T_1 \left(\frac{T_4}{T_1} - 1 \right)}{T_2 \left(\frac{T_3}{T_2} - 1 \right) + \gamma T_3 \left(\frac{T_{3'}}{T_3} - 1 \right)} \right\} \quad (33B)$$

$$= 1 - \frac{\frac{T_4}{T_1} - 1}{\frac{T_2}{T_1} \left(\frac{T_3}{T_2} - 1 \right) + \frac{\gamma T_3}{T_2} \frac{T_2}{T_1} \left(\frac{T_{3'}}{T_3} - 1 \right)} \quad (33C)$$

From thermodynamics

$$\frac{T_3}{T_2} = \frac{p_3}{p_2} = r_p \quad (34)$$

the explosion or pressure ratio and

$$\frac{T_{3'}}{T_3} = \frac{V_{3'}}{V_3} = r_c \quad (35)$$

the cut-off ratio.

$$\text{Now, } \frac{T_4}{T_1} = \frac{p_4}{p_1} = \frac{p_4}{p_{3'}} \frac{p_{3'}}{p_3} \frac{p_3}{p_2} \frac{p_2}{p_1}$$

$$\text{Also } \frac{p_4}{p_{3'}} = \left(\frac{V_{3'}}{V_4} \right)^\gamma = \left(\frac{V_{3'}}{V_3} \frac{V_3}{V_4} \right)^\gamma = \left(r_c \frac{1}{r} \right)^\gamma$$

$$\text{And } \frac{p_2}{p_1} = r^\gamma$$

$$\text{Thus } \frac{T_4}{T_1} = r_p r_c^\gamma$$

$$\text{Also } \frac{T_2}{T_1} = \left(\frac{V_1}{V_2} \right)^\gamma = r^{\gamma-1}$$

Therefore, the thermal efficiency of the dual cycle is

$$\eta = 1 - \frac{1}{r^{\gamma-1}} \left[\frac{r_p r_c^{\gamma} - 1}{(r_p - 1) + \gamma r_p (r_c - 1)} \right] \quad (36)$$

We can substitute the value of η from Eq. 36 in Eq. 14 and obtain the value of mep/p_1 for the dual cycle.

In terms of the cut-off ratio and pressure ratio, we can obtain another expression for mep/p_1 as follows:

$$\frac{mep}{p_1} = \frac{\gamma r_p r^{\gamma} (r_c - 1) + r^{\gamma} (r_p - 1) - r (r_p r_c^{\gamma} - 1)}{(r - 1)(\gamma - 1)} \quad (37)$$

For the dual cycle, the expression for mep/p_3 is as follows:

$$\frac{mep}{p_3} = \frac{mep}{p_1} \left(\frac{p_1}{p_3} \right) \quad (38)$$

Since the dual cycle is also called the limited pressure cycle, the peak pressure, p_3 , is usually specified. Since the initial pressure, p_1 , is known, the ratio p_3/p_1 is known. We can correlate r_p with this ratio as follows:

$$r_p = \frac{p_3}{p_1} \left(\frac{1}{r^{\gamma}} \right) \quad (39)$$

We can obtain an expression for r_c in terms of Q' and r_p and other known quantities as follows:

$$r_c = \frac{1}{\gamma} \left(\left[\left\{ \frac{Q'}{c_v T_1 r^{\gamma-1}} \right\} \frac{1}{r_p} \right] + (\gamma - 1) \right) \quad (40)$$

We can also obtain an expression for r_p in terms of Q' and r_c and other known quantities as follows:

$$r_p = \frac{\left[\frac{Q'}{c_v T_1 r^{\gamma-1}} + 1 \right]}{1 + \gamma r_c - \gamma} \quad (41)$$

The Brayton Cycle

The Brayton cycle is also referred to as the Joule cycle or the gas turbine air cycle because all modern gas turbines work on this cycle. However, if the Brayton cycle is to be used for reciprocating piston engines, it requires two cylinders, one for compression and the other for expansion. Heat addition may be carried out separately in a heat exchanger or within the expander itself.

The pressure-volume and the corresponding temperature-entropy diagrams are shown in Figs 10 and 11 respectively.

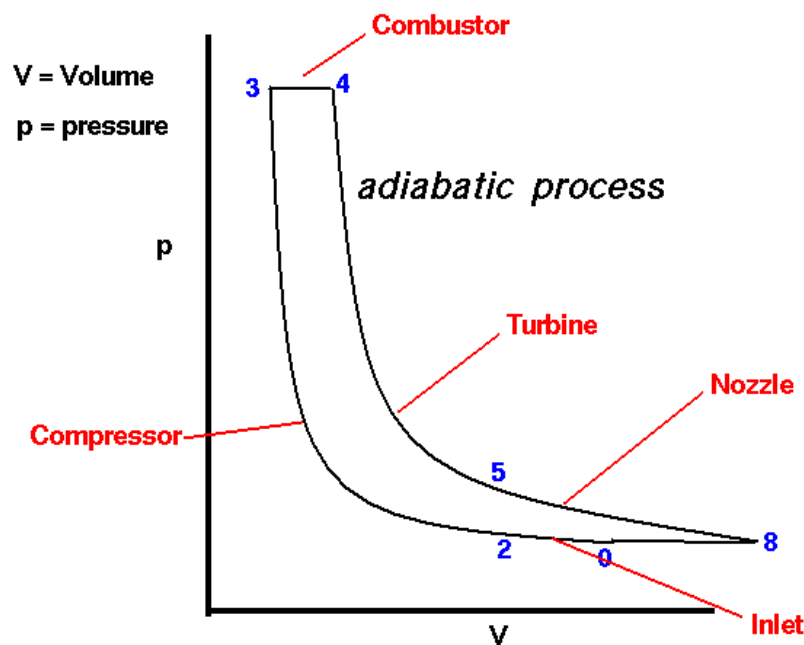


Fig. 10

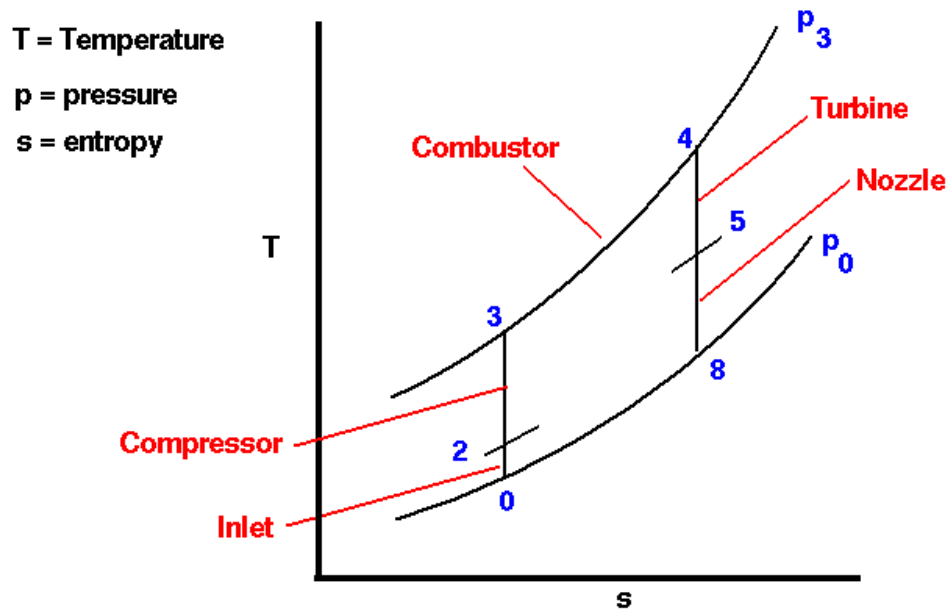


Fig. 11

The cycle consists of an isentropic compression process, a constant pressure heat addition process, an isentropic expansion process and a constant pressure heat rejection process. Expansion is carried out till the pressure drops to the initial (atmospheric) value.

Heat supplied in the cycle, Q_s , is given by

$$C_p(T_3 - T_2)$$

Heat rejected in the cycle, Q_s , is given by

$$C_p(T_4 - T_1)$$

Hence the thermal efficiency of the cycle is given by

$$\eta_{th} = 1 - \frac{(T_4 - T_1)}{(T_3 - T_2)}$$

$$= 1 - \frac{T_1}{T_2} \left\{ \frac{\left(\frac{T_4}{T_1} - 1 \right)}{\left(\frac{T_3}{T_2} - 1 \right)} \right\} \quad (42)$$

$$\text{Now } \frac{T_2}{T_1} = \left(\frac{p_2}{p_1} \right)^{\frac{\gamma-1}{\gamma}} = \left(\frac{p_3}{p_4} \right)^{\frac{\gamma-1}{\gamma}} = \frac{T_3}{T_4}$$

$$\text{And since } \frac{T_2}{T_1} = \frac{T_3}{T_4} \quad \text{we have} \quad \frac{T_4}{T_1} = \frac{T_3}{T_2}$$

Hence, substituting in Eq. 62, we get, assuming that r_p is the pressure ratio p_2/p_1

$$\eta_{th} = 1 - \frac{T_1}{T_2}$$

$$= 1 - \frac{1}{\left(\frac{p_2}{p_1} \right)^{\frac{\gamma-1}{\gamma}}}$$

$$= 1 - \frac{1}{r_p^{\frac{\gamma-1}{\gamma}}} \quad (43)$$


This is numerically equal to the efficiency of the Otto cycle if we put

$$\frac{T_1}{T_2} = \left(\frac{V_2}{V_1} \right)^{\gamma-1} = \left(\frac{1}{r} \right)^{\gamma-1}$$


$$\text{so that } \eta_{th} = 1 - \frac{1}{r^{\gamma-1}} \quad (43A)$$


where r is the volumetric compression ratio.

Actual PV diagram of four stroke engine

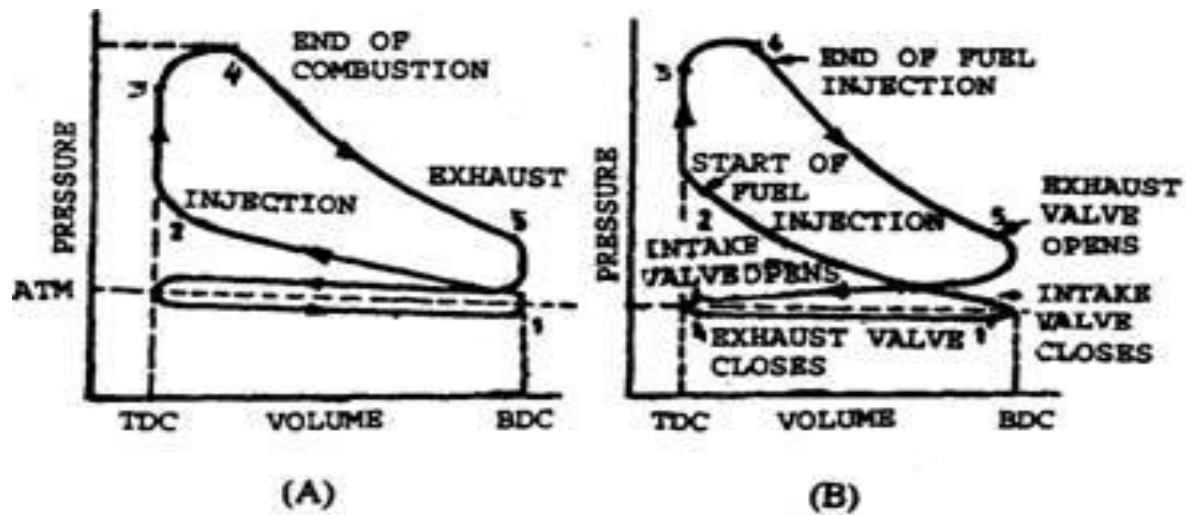


Theoretical PV diagram for four stroke engine

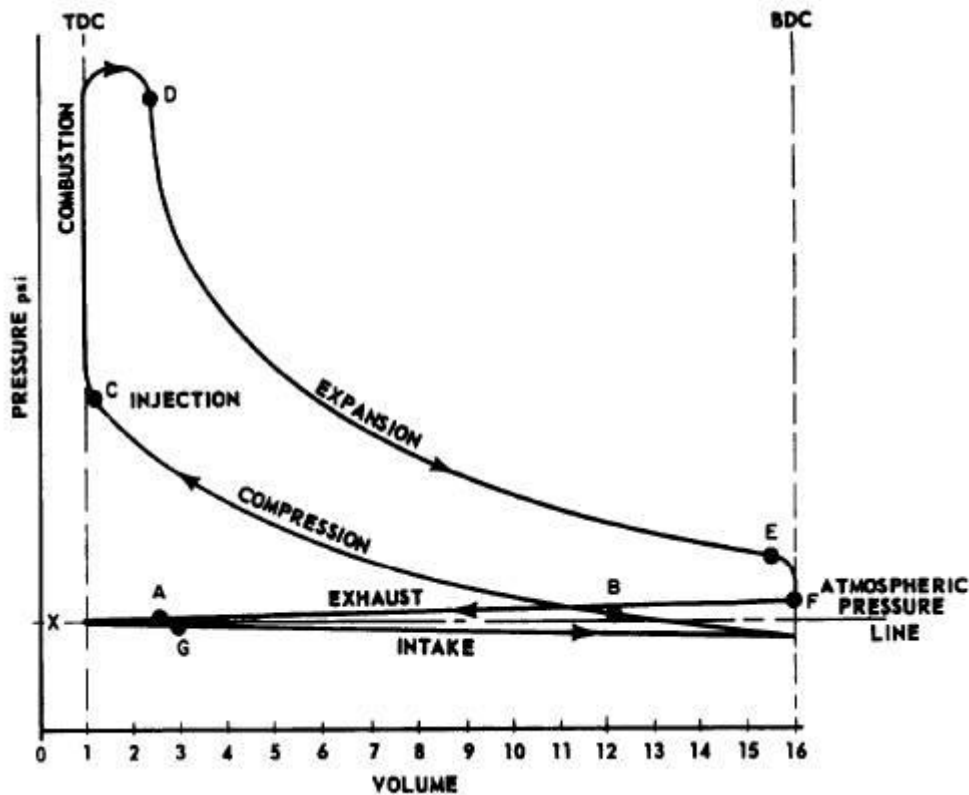

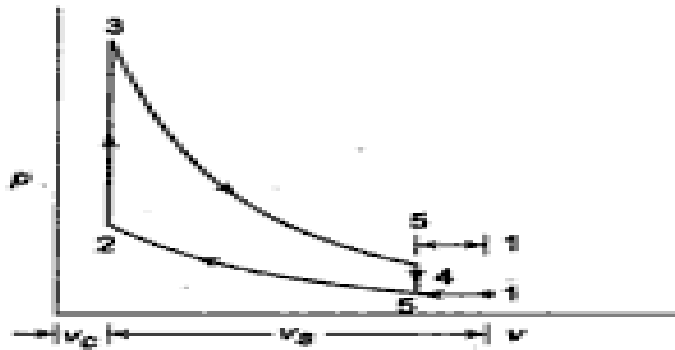Theoretical and Actual PV diagram of Two stroke Petrol Engine:

Theoretical p-v diagram for two-stroke petrol engine v_c -clearance volume
 v_s -stroke volume 1-5 piston travel during open period

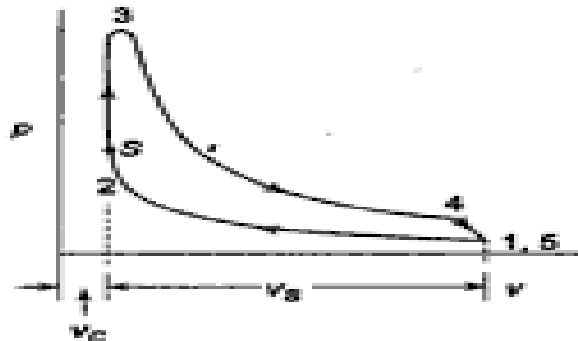

Actual p-v diagram for a two stroke petrol engine

Problems:**Problems to determine,**

1. Air Standard Efficiency
2. Mean Effective Pressure for Air Standard Cycles

Sample Problems

1. A Dual combustion air standard cycle has a compression ratio of 10. The constant pressure part of combustion takes place at 40 bar. The highest and the lowest temperature of the cycle are 1727°C and 27°C respectively. The pressure at the beginning of compression is 1 bar. Calculate-

- (i) The pressure and temperature at key points of the cycle.
- (ii) The heat supplied at constant volume,
- (iii) The heat supplied at constant pressure
- (iv) The heat rejected
- (v) The Work output,
- (vi) The efficiency and
- (vii) Mean effective pressure.

2. An Engine working on Otto cycle has a volume of 0.45 m^3 , pressure 1 bar and temperature 300°C , at the beginning of compression stroke. At the end of Compression stroke, the pressure is 11 bar and 210 KJ of heat is added at constant Volume. Determine
- Pressure, temperature and volumes at salient points in the cycle.
 - Efficiency.

UNIT-II**INTERNAL COMBUSTION ENGINES****Syllabus:**

Classification – Components and their function – Valve timing diagram and port timing diagram – Comparison of two stroke and four stroke engines – Carburetor system, Diesel pump and injector system. Performance calculation – Comparison of petrol and diesel engine- Lubrication system and Cooling system – Battery and magneto ignition system-Formation of exhaust emission in SI and CI engines.

Classification of IC engine:

Normally IC engines are classified into

- 1.C.I engines and
- 2.S.I engines

Some of the important classifications are given below,

1. Number of strokes
 - two stroke and four stroke
2. Working Cycles
 - Otto ,Diesel, Dual cycle
3. Cylinder arrangement
 - In-line, V-type, Opposed, Radial
4. Valve Arrangement
 - T-head, F-head, L-head, I-head
5. Fuel Used
 - Petrol, Diesel, Gas
6. Combustion chamber design
 - Open, divided
7. Cooling System
 - Water and air cooling
8. According to the number of cylinders
 - Single and Multi
9. According to the speed
 - Slow, medium, and high speed engines
10. According to the application
 - Stationary, Automotive, Marine, Locomotive, Aircraft etc.,

Components of I.C engine**1.Cylinder block:**

The cylinder block is the main body of the engine, the structure that supports all the other components of the engine. In the case of the single cylinder engine the cylinder block houses the cylinder, while in the case of multi-cylinder engine the number of cylinders are cast together to form the cylinder block. The cylinder head is mounted at the top of the cylinder block.

When the vehicle runs, large amounts of heat are generated within the cylinder block. To remove

this heat the cylinder block and the cylinder head are cooled by water flowing through the water jackets within larger engines such as those found in cars and trucks. For smaller vehicles like motorcycles, fins are provided on the cylinder block and on the cylinder head to cool them. The bottom portion of the cylinder block is called a crankcase. Within the crankcase is where lubricating oil, which is used for lubricating various moving parts of the engine, is stored.

2) Cylinder:

As the name suggests it is a cylindrical shaped vessel fitted in the cylinder block. This cylinder can be removed from the cylinder block and machined whenever required to. It is also called a liner or sleeve. Inside the cylinder the piston moves up and down, which is called the reciprocating motion of the piston. Burning of fuel occurs at the top of the cylinder, due to which the reciprocating motion of the piston is produced. The surface of the cylinder is finished to a high finish, so that there is minimal friction between the piston and the cylinder.

3) Piston:

The piston is the round cylindrical component that performs a reciprocating motion inside the cylinder. While the cylinder itself is the female part, the piston is the male part. The piston fits perfectly inside the cylinder. Piston rings are fitted over the piston. The gap between the piston and the cylinder is filled by the piston rings and lubricating oil. The piston is usually made up of aluminum.

4) Piston rings:

The piston rings are thin rings fitted in the slots made along the surface of the piston. It provides a tight seal between the piston and the cylinder walls that prevents leaking of the combustion gases from one side to the other. This ensures that that motion of the piston produces as close as to the power generated from inside the cylinder.

5) Combustion chamber:

It is in the combustion chamber where the actual burning of fuel occurs. It is the uppermost portion of the cylinder enclosed by the cylinder head and the piston. When the fuel is burnt, much thermal energy is produced which generates excessively high pressures causing the reciprocating motion of the piston.

6) Inlet manifold:

Through the inlet manifold the air or air-fuel mixture is drawn into the cylinder.

7) Exhaust manifold:

All the exhaust gases generated inside the cylinder after burning of fuel are discharged through the exhaust manifold into the atmosphere.

8) Inlet and exhaust valves:

The inlet and the exhaust valves are placed at the top of the cylinder in the cylinder head. The inlet valve allows the intake of the fuel during suction stroke of the piston and to close thereafter. During the exhaust stroke of the piston the exhaust valves open allowing the exhaust gases to release to the atmosphere. Both these valves allow the flow of fuel and gases in single direction only.

9) Spark plug:

The spark plug is a device that produces a small spark that causes the instant burning of the pressurized fuel.

10) Connecting rod:

It is the connecting link between the piston and the crankshaft that performs the rotary motion. There are two ends of the connecting rod called the small end and big end. The small end of the connecting rod is connected to the piston by gudgeon pin, while the big end is

connected to crankshaft by crank pin.


11) Crankshaft:

The crankshaft performs the rotary motion. It is connected to the axle of the wheels which move as the crankshaft rotates. The reciprocating motion of the piston is converted into the rotary motion of the crankshaft with the help of connecting rod. The crankshaft is located in the crankcase and it rotates in the bushings.

12) Camshaft:


It takes driving force from crankshaft through gear train or chain and operates the inlet valve as well as exhaust valve with the help of cam followers, push rod and rocker arms.

Theoretical valve timing diagram of four stroke engine:

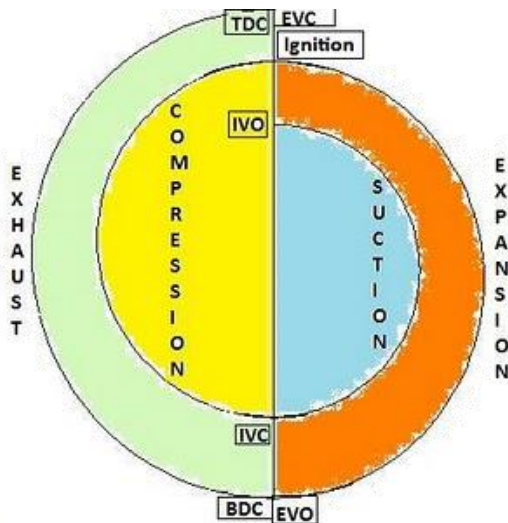


Valve Timing Diagram-4stroke engine/otto cycle (Theoretical)

Actual valve timing diagram of four stroke engine:

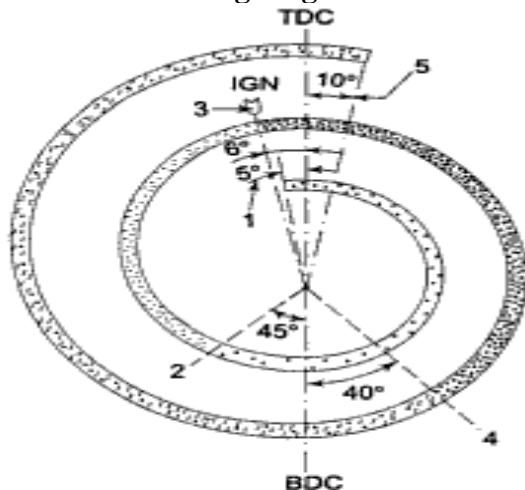

Valve timing 1. Inlet valve open at 5° before TDC; 2. Inlet valve closed at 45° after BDC; 3. Ignition at 6° before TDC; 4. Exhaust valve open at 40° before BDC; 5. Exhaust valve closed at 10° after TDC

Theoretical port timing diagram of two stroke engine:

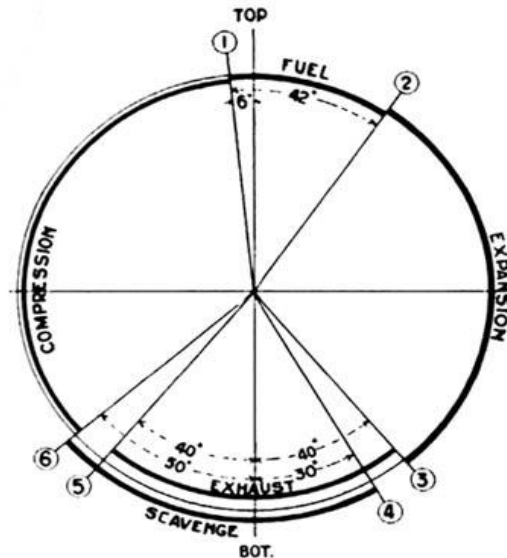

- 1- IPO
- 2- IPC
- 3- EPO
- 4- TPO
- 5- TPC
- 6- EPC

Comparison of two stroke and four stroke engines:

Sl No.	Four stroke Cycle engine	Two Stroke Cycle Engine
1	For every two revolutions of the crankshaft, there is one power stroke i.e., after every four piston strokes.	For every one revolution of the crankshaft, there is one power stroke i.e., after every two piston strokes.
2	For some power, more space is required.	For the same power less space is required.
3	Valves are required - inlet and exhaust valves.	Ports are made in the cylinder walls - inlet, exhaust and transfer port.
4	As the valves move frequently, lubrication is essential.	Arrangement of ports, reduce wear and tear and lubrication is not very essential.
5	Heavier flywheel is required because the turning moment (torque) of the crankshaft is not uniform i.e. one working stroke in every two revolution.	Lighter flywheel is required because the turning moment of the crankshaft is much more uniform i.e. one working stroke for every revolution.
6	These engines are water cooled, making it complicated in design and difficulty to maintain	These engines are generally air cooled, simple in design and easy to maintain.
7	The fuel-air change (mixture) is completely utilized thus efficiency is higher	As inlet and outlet port open simultaneous, some times fresh charge escapes with the exhaust gases are not always completely removed. This causes lower efficiency


Comparison of petrol and diesel engine:

Sl. No.	Petrol Engine	Diesel Engine
1	The exhaust is less noisy.	The exhaust is noisy due to short time available for exhaust.
2	Intake (Petrol) and air is admitted into the cylinder during suction stroke.	Air alone is admitted into the cylinder during suction stroke.
3	Fuel Ignition: - By spark plug -Spark Ignition (SI) engine.	By the compressed hot air Compression Ignition (CI) Engine.
4	Cycle of operation: - Otto cycle (constant volume cycle)	Diesel Cycle.
5	Compression Ratio Low (7 to 8).	High (16 to 17).
6	Fuel admission Through carburetor.	Through fuel injector.
7	Engine speed: - high speed; can run up to 5000 rpm since petrol ' engine is lighter.	Low speed; about up to 3500 rpm
8	Weight:- Because of low compression ratio, the engine cylinder undergoes less pressure. It weights about 0.5 to 3 kg per KW (kilo watt) of power produced.	Higher compression ratio in diesel engines result in higher pressure, therefore diesel engines are sturdier and heavier. Diesel engine weights about 2 to 10 kg per KW of power produced
9	Lubricating Property: - Petrol does not have lubricating properties	Diesel has lubricating properties.
10	Engine starting in cold condition is easy	Greater cranking effort is required to overcome the higher compression ratio, due to the cold air in the combustion chamber.
11	Fire hazard: - Petrol is highly volatile and there is a greater risk of fire.	Diesel 'is less volatile and has a reduced risk of fire.
12	Engine cost: - Less costly since the fuel systems used are not expensive.	More costly since the fuel injection system used are expensive.
13	Fuel Consumption: - more	Less
14	Fuel cost: - More	Less
15	Maintenance cost: - Less skill is required. Spark plugs are not expensive.	More skill is required for repair of injection equipment. Fuel injectors are very expensive.
16	Space:- For the same power output, Petrol engine occupies lesser space.	For the same output, more space is required for diesel engine.
17	Engine life: - Less than 60000 KM	More than 1,50,000 km
18	Vibration and noise: - Very less	More due to high operation pressure (compression ratio).

Simple Carburetor:

The function of a carburetor is to vaporize the petrol (gasoline) by means of engine suction and to supply the required air and fuel (petrol) mixture to the engine cylinder. During the suction stroke, air flows from atmosphere into the cylinder. As the air passes through the venturi, velocity of air increases and its pressure falls below the atmosphere. The pressure at the nozzle tip is also below the atmospheric pressure. The pressure on the fuel surface of the fuel tank is atmospheric. Due to which a pressure difference is created, which causes the flow of fuel through the fuel jet into the air stream. As the fuel and air pass ahead of the venturi, the fuel gets vaporized and required uniform mixture is supplied to the engine.

The quantity of fuel supplied to the engine depends upon the opening of throttle valve which is governed by the governor.

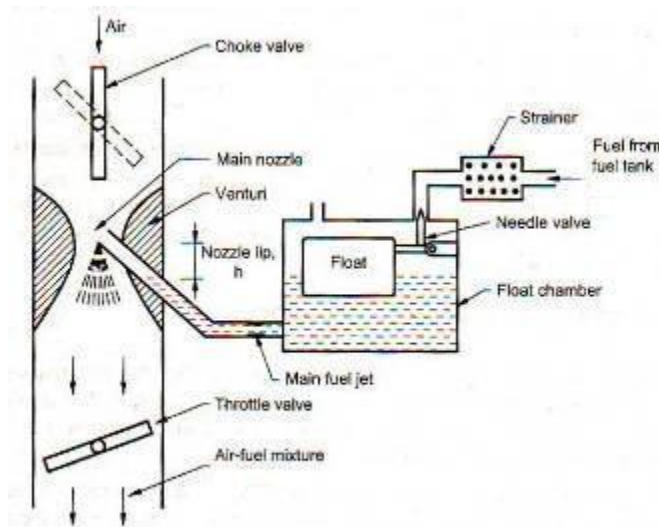

The main parts of a simple carburetor are:

Float chamber: The level of fuel in the float chamber is maintained slightly below the tip of the nozzle. If the level of petrol is above then the petrol will run from the nozzle and drip from the carburetor. If the petrol level is kept low than the tip of the nozzle then part of pressure head is lost in lifting the petrol up to the tip of nozzle. Generally it is kept at 5mm from the level of petrol in the float chamber. The level of the fuel is kept constant with the help of float and needle


valve. The needle valve closes the inlet supply from main tank if the level rises above the required level. If the level of fuel decreases then the needle valve opens the supply. Generally the fuel level is kept 5mm below the nozzle tip.



Venturi: When the mixture passes through the narrowest section its velocity increases and pressure falls below the atmospheric. As it passes through the divergent section, pressure increases again.

Throttle valve: It controls the quantity of air and fuel mixture supplied to the engine through intake manifold and also the head under which the fuel flows.

Choke: It provides an extra rich mixture during to the engine starting and in cold weather to warm up the engine. The choke valve is nearly closed during cold starting and warming. It creates a high vacuum near the fuel jet which causes flow of more fuel from the jet.

Diesel Pump and Injector system:

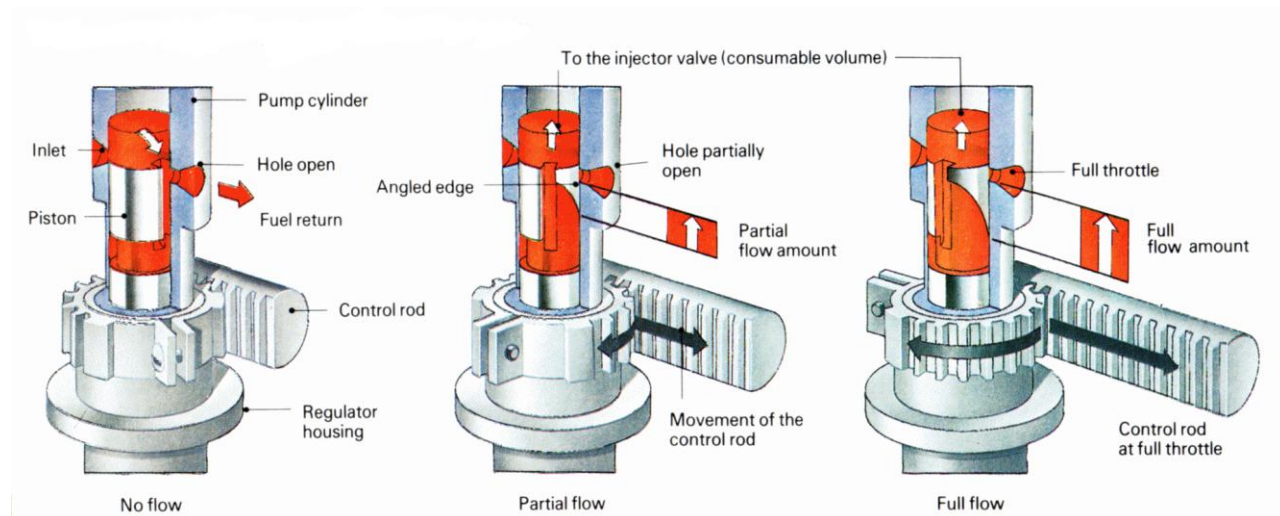

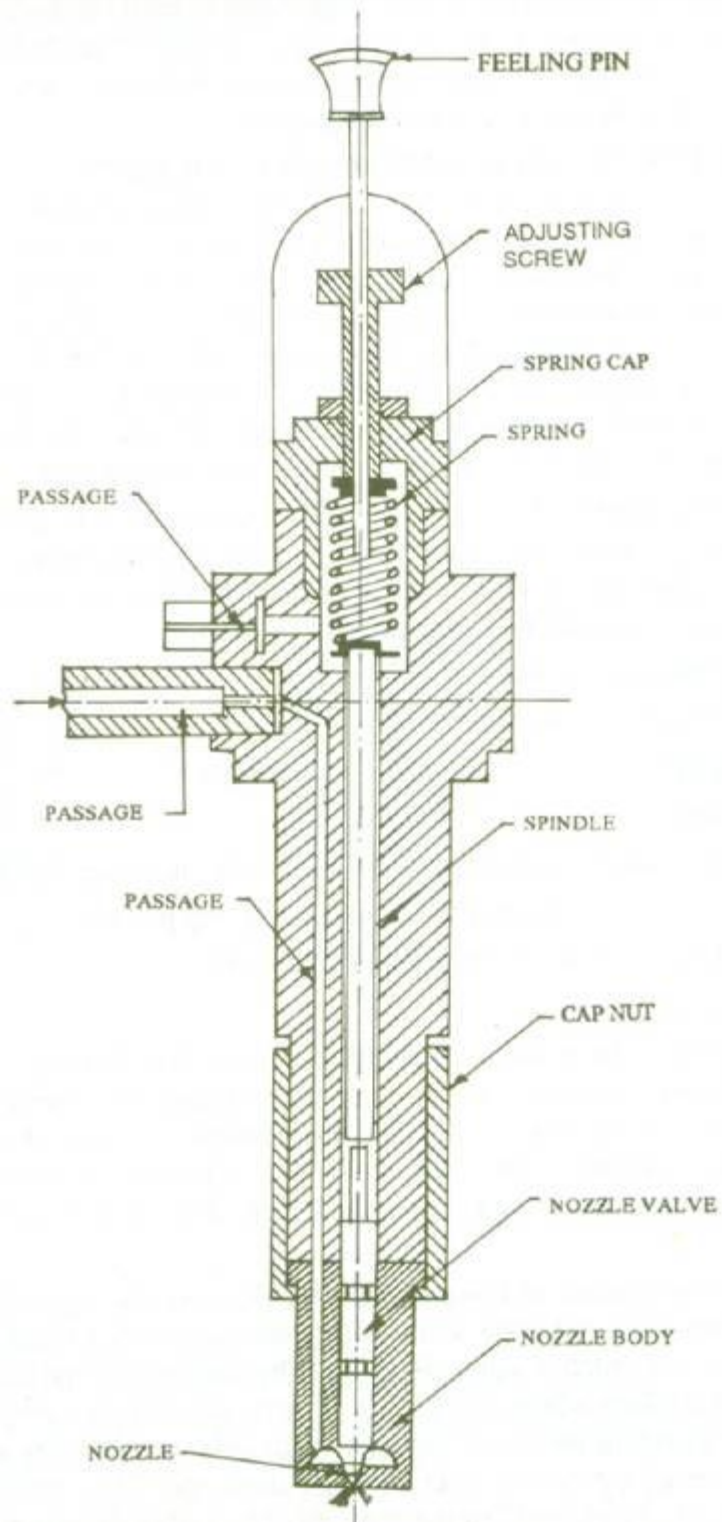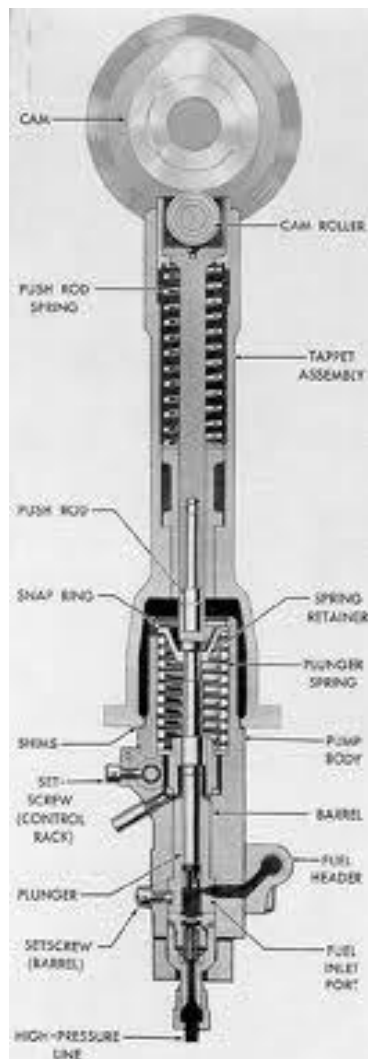**Fig. Fuel injector**

Diesel knocking and detonation:

We already know that if the delay period is long, a large amount of fuel will be injected and accumulated in the chamber. The auto ignition of this large amount of fuel may cause high rate of pressure rise and high maximum pressure which may cause knocking in diesel engines. A long delay period not only increases the amount of fuel injected by the moment of ignition, but also improve the homogeneity of the fuel air mixture and its chemical preparedness for explosion type self ignition similar to detonation in SI engines.

It is very instructive to compare the phenomenon of detonation in SI engines with that of knocking in CI engines. There is no doubt that these two phenomena are fundamentally similar. Both are processes of auto ignition subject to the ignition time lag characteristic of the fuel air mixture. However, differences in the knocking phenomena of the SI engine and the CI engine should also be carefully noted:

1. In the SI engine, the detonation occurs near the end of combustion whereas in the CI engine detonation occurs near the beginning of combustion as shown in fig. 6.10.
2. The detonation in the SI engine is of a homogeneous charge causing very high rate of pressure rise and very high maximum pressure. In the CI engine the fuel and air are in perfectly mixed and hence the rate of pressure rise is normally lower than that in the detonating part of the charge in the SI engine.
3. Since in the CI engine the fuel is injected into the cylinder only at the end of the compression stroke there is no question of pre ignition or pre mature ignition as in the SI engine.
4. In the SI engine it is relatively easy to distinguish between knocking and non-knocking operation as the human ear easily finds the distinction. However, in the case of the CI engine the normal ignition is itself by auto ignition and hence no CI engines have a sufficiently high rate of pressure rise per degree crank angle to cause audible noise. When such noise becomes excessive or there is excessive vibration in engine structure, in the opinion of the observer, the engine is said to knock. It is clear that personal judgment is involved here. Thus in the CI engine there is no definite distinction between normal and knocking combustion. The maximum rate of pressure rise in the CI engine may reach as high as 10 bar per crank degree angle.

It is most important to note that factors that tend to reduce detonation in the SI engine increase knocking in CI engine and vice versa because of the following reason. The detonation or knocking in the SI engine is due to simultaneous auto ignition of the last part of the charge. To eliminate detonation in the SI engine we want to prevent altogether the auto ignition of the last part of the charge and therefore desire a long delay period and high self ignition temperature of the fuel. To eliminate knocking in the CI engine we want to achieve auto ignitions early as possible

therefore desire a short delay period and low self ignition temperature of the fuel. Table 6.2 gives the factors which reduce knocking in the SI and CI engines.

Table: Factors tending to reduce knocking in SI and CI engine

Sr. No.	Factors	SI Engine	CI Engine
1	Self ignition temperature of fuel	High	Low
2	Time lag or delay period for fuel	Long	Short
3	Compression ratio	Low	High
4	Inlet temperature	Low	High
5	Inlet pressure	Low	High
6	Combustion chamber wall temperature	Low	High
7	Speed	High	Low
8	Cylinder size	Small	Large

It is also clear from the table and discussion that a good CI engine fuel is a bad SI engine fuel and a good SI engine is bad CI engine fuel. In other words diesel oil has low self ignition temperature and short time lag where as petrol have high self ignition temperature and a long ignition lag. In terms of fuel rating diesel oil has high cetane number (40 – 60) and low octane number (about 30) and petrol has high octane number (80 – 90) and low cetane number (18).

Ignition System:

Basically Convectional Ignition systems are of 2 types :

- (a) Battery or Coil Ignition System, and
- (b) Magneto Ignition System.

Both these conventional, ignition systems work on mutual electromagnetic induction principle.

Battery ignition system was generally used in 4-wheelers, but now-a-days it is more commonly used in 2-wheelers also (i.e. Button start, 2-wheelers like Pulsar, Kinetic Honda; Honda-Activa, Scooty, Fiero, etc.). In this case 6 V or 12 V batteries will supply necessary current in the primary winding.

Magneto ignition system is mainly used in 2-wheelers, kick start engines.

(Example, Bajaj Scooters, Boxer, Victor, Splendor, Passion, etc.).

In this case magneto will produce and supply current to the primary winding. So in magneto ignition system magneto replaces the battery.


Battery or Coil Ignition System

Figure shows line diagram of battery ignition system for a 4-cylinder petrol engine. It mainly consists of a 6 or 12 volt battery, ammeter, ignition switch, auto-transformer (step up transformer), contact breaker, capacitor, distributor rotor, distributor contact points, spark plugs, etc.

Note that the Figure 4.1 shows the ignition system for 4-cylinder petrol engine, here there are 4-spark plugs and contact breaker cam has 4-corners. (If it is for 6-cylinder engine it will have 6-spark plugs and contact breaker cam will be a hexagon).

The ignition system is divided into 2-circuits :

- i. **Primary Circuit :** It consists of 6 or 12 V battery, ammeter, ignition switch, primary winding it has 200-300 turns of 20 SWG (Sharps Wire Gauge) gauge wire, contact breaker, capacitor.

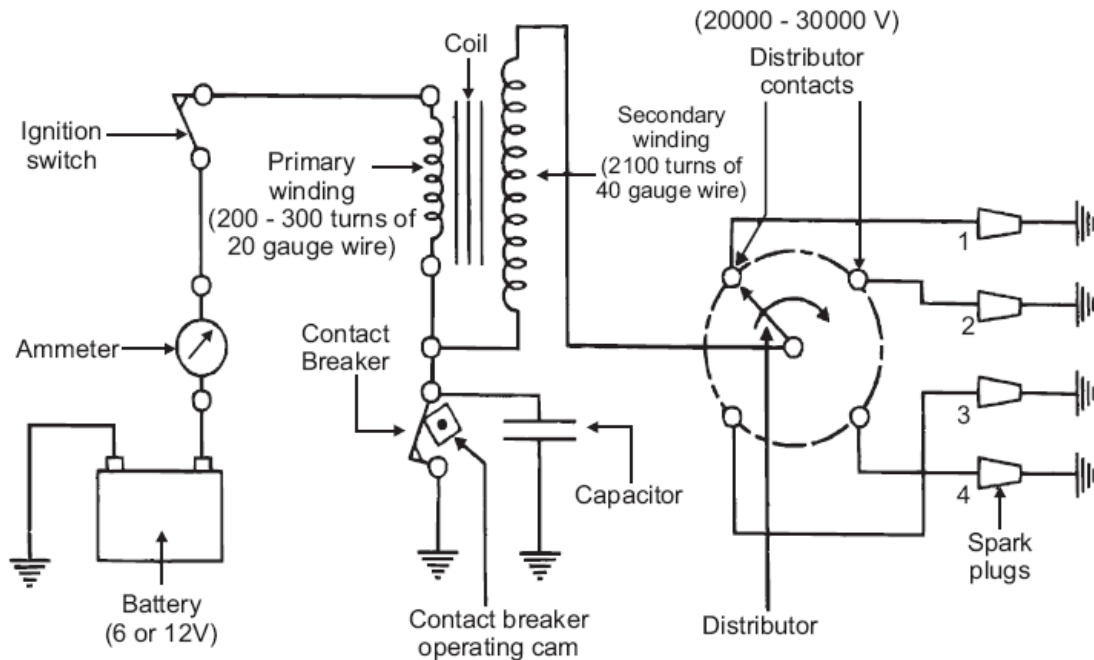


(ii) **Secondary Circuit :** It consists of secondary winding. Secondary **Ignition Systems** winding consists of about 21000 turns of 40 (S WG) gauge wire. Bottom end of which is connected to bottom end of primary and top end of secondary winding is connected to centre of distributor rotor. Distributor rotors rotate and make contacts with contact points and are connected to spark plugs which are fitted in cylinder heads (engine earth).

(iii) **Working :** When the ignition switch is closed and engine is cranked, as soon as the contact breaker closes, a low voltage current will flow through the primary winding. It is also to be noted that the contact breaker cam opens and closes the circuit 4-times (for 4 cylinders) in one revolution. When the contact breaker opens the contact, the magnetic field begins to collapse. Because of this collapsing magnetic field, current will be induced in the secondary winding. And because of more turns (@ 21000 turns) of secondary, voltage goes up to 28000-30000 volts.

This high voltage current is brought to centre of the distributor rotor. Distributor rotor rotates and supplies this high voltage current to proper spark plug depending upon the engine firing order. When the high voltage current jumps the spark plug gap, it produces the spark and the charge is ignited-combustion starts-products of combustion expand and produce power.


Magneto Ignition System

In this case magneto will produce and supply the required current to the primary winding. In this case as shown, we can have rotating magneto with fixed coil or rotating coil with fixed magneto for producing and supplying current to primary, remaining arrangement is same as that of a battery ignition system.

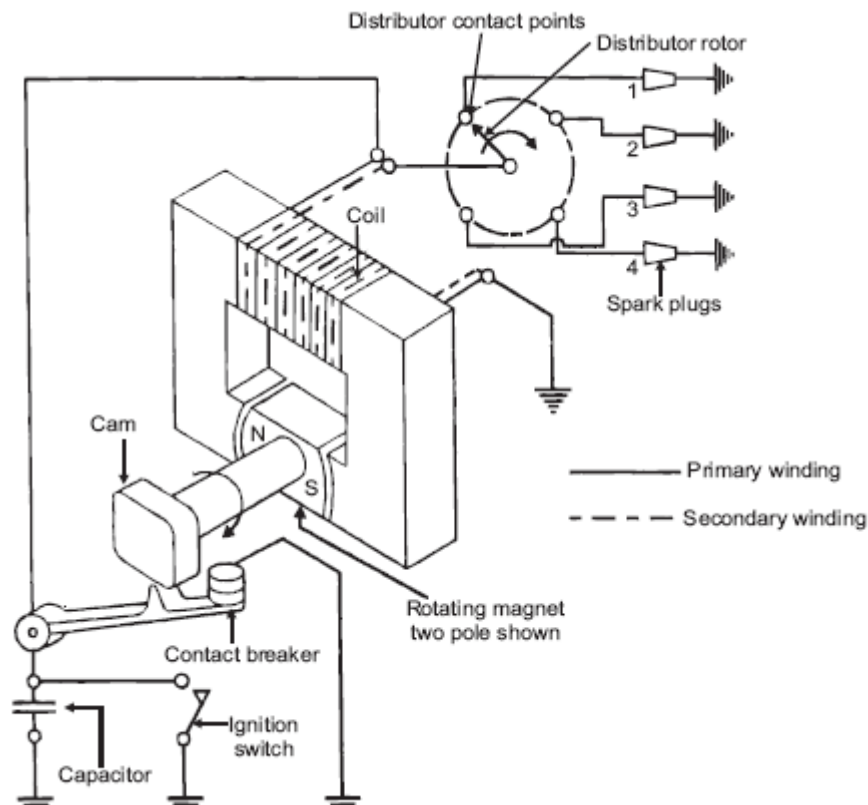

Comparison between Battery and Magneto Ignition System:

Battery Ignition	Magneto Ignition
Battery is a must.	No battery needed.
Battery supplies current in primary circuit.	Magneto produces the required current for primary circuit.
A good spark is available at low speed also.	During starting the quality of spark is poor due to slow speed.
Occupies more space.	Very much compact.
Recharging is a must in case battery gets discharged.	No such arrangement required.
Mostly employed in car and bus for which it is required to crank the engine.	Used on motorcycles, scooters, etc.
Battery maintenance is required.	No battery maintenance problems.

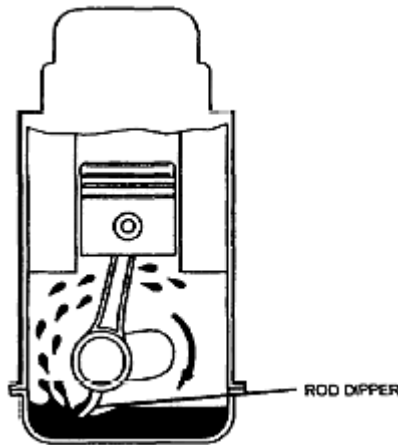
Lubrication System:**Splash :**

The splash system is no longer used in automotive engines. It is widely used in small four-cycle engines for lawn mowers, outboard marine operation, and so on.

In the splash lubricating system, oil is splashed up from the oil pan or oil trays in the lower part of the crankcase. The oil is thrown upward as droplets or fine mist and provides adequate lubrication to valve mechanisms, piston pins, cylinder walls, and piston rings.

In the engine, dippers on the connecting-rod bearing caps enter the oil pan with each crankshaft revolution to produce the oil splash. A passage is drilled in each connecting rod from the dipper to the bearing to ensure lubrication.

This system is too uncertain for automotive applications. One reason is that the level of oil in the crankcase will vary greatly the amount of lubrication received by the engine. A high level results in excess lubrication and oil consumption and a slightly low level results in inadequate lubrication and failure of the engine.

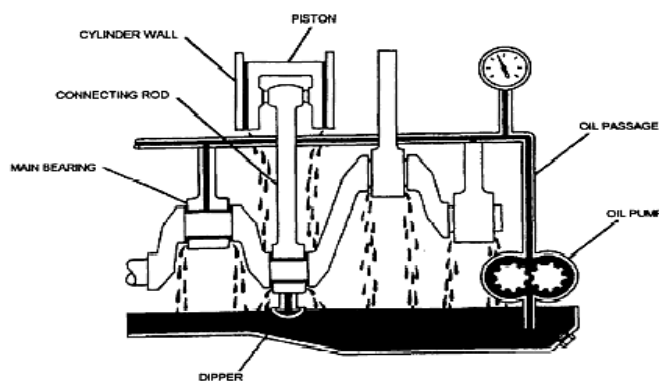Combination Splash and Force Feed :

In a combination splash and force feed, oil is delivered to some parts by means of splashing and other parts through oil passages under pressure from the oil pump.


The oil from the pump enters the oil galleries. From the oil galleries, it flows to the main bearings and camshaft bearings. The main bearings have oil-feed holes or grooves that feed oil into drilled passages in the crankshaft. The oil flows through these passages to the connecting rod bearings. From there, on some engines, it flows through holes drilled in the connecting rods to the piston-pin bearings.

Cylinder walls are lubricated by splashing oil thrown off from the connecting-rod bearings. Some engines use small troughs under each connecting rod that are kept full by small nozzles which deliver oil under pressure from the oil pump. These oil nozzles deliver an increasingly heavy stream as speed increases.

At very high speeds these oil streams are powerful enough to strike the dippers directly. This causes a much heavier splash so that adequate lubrication of the pistons and the connecting-rod bearings is provided at higher speeds.

If a combination system is used on an overhead valve engine, the upper valve train is lubricated by pressure from the pump.

Force Feed :

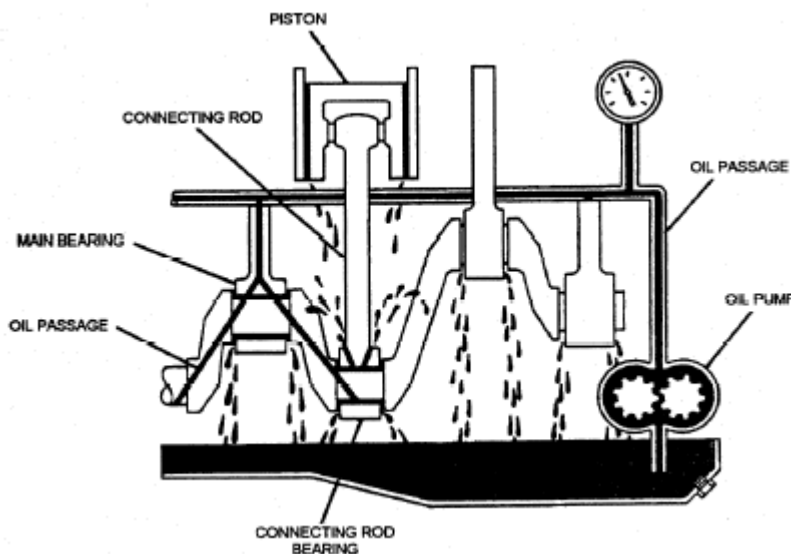

A somewhat more complete pressurization of lubrication is achieved in the force-feed lubrication system. Oil is forced by the oil pump from the crankcase to the main bearings and the camshaft bearings. Unlike the combination system the connecting-rod bearings are also fed oil under pressure from the pump.

Oil passages are drilled in the crankshaft to lead oil to the connecting-rod bearings. The passages deliver oil from the main bearing journals to the rod bearing journals. In some engines, these

opening are holes that line up once for every crankshaft revolution. In other engines, there are annular grooves in the main bearings through which oil can feed constantly into the hole in the crankshaft.

The pressurized oil that lubricates the connecting-rod bearings goes on to lubricate the pistons and walls by squirting out through strategically drilled holes. This lubrication system is used in virtually all engines that are equipped with semifloating piston pins.

Full Force Feed:

In a full force-feed lubrication system, the main bearings, rod bearings, camshaft bearings, and the complete valve mechanism are lubricated by oil under pressure. In addition, the full force-feed lubrication system provides lubrication under pressure to the pistons and the piston pins. This is accomplished by holes drilled the length of the connecting rod, creating an oil passage from the connecting rod bearing to the piston pin bearing. This passage not only feeds the piston pin bearings but also provides lubrication for the pistons and cylinder walls. This system is used in virtually all engines that are equipped with full-floating piston pins.

Cooling System:**Air Cooled System**


Air cooled system is generally used in small engines say up to 15-20 Kw and in aero plane engines.

In this system fins or extended surfaces are provided on the cylinder walls, cylinder head, etc. Heat generated due to combustion in the engine cylinder will be conducted to the fins and when the air flows over the fins, heat will be dissipated to air.

The amount of heat dissipated to air depends upon :

- (a) Amount of air flowing through the fins.
- (b) Fin surface area.

I Thermal conductivity of metal used for fins.

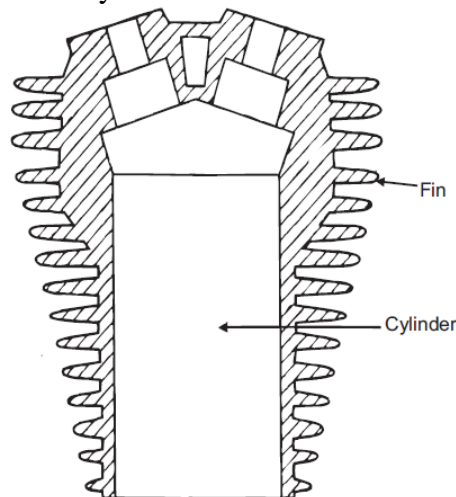

Advantages of Air Cooled System

Following are the advantages of air cooled system :

- (a) Radiator/pump is absent hence the system is light.
- (b) In case of water cooling system there are leakages, but in this case there are no leakages.
- (c) Coolant and antifreeze solutions are not required.
- (d) This system can be used in cold climates, where if water is used it may freeze.

Disadvantages of Air Cooled System

- (a) Comparatively it is less efficient.
- (b) It is used only in aero planes and motorcycle engines where the engines are exposed to air directly.

Water Cooling System:


In this method, cooling water jackets are provided around the cylinder, cylinder head, valve seats etc. The water when circulated through the jackets, it absorbs heat of combustion. This hot water will then be cooling in the radiator partially by a fan and partially by the flow developed by the forward motion of the vehicle. The cooled water is again recirculated through the water jackets

Types of Water Cooling System


There are two types of water cooling system :

Thermo Siphon System

In this system the circulation of water is due to difference in temperature (i.e. difference in densities) of water. So in this system pump is not required but water is circulated because of density difference only.

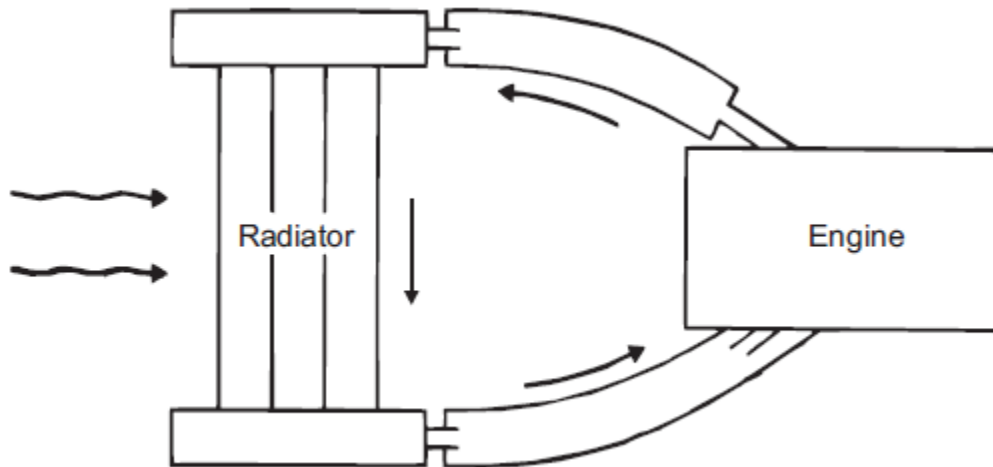**Pump Circulation System**

In this system circulation of water is obtained by a pump. This pump is driven by means of engine output shaft through V-belts.

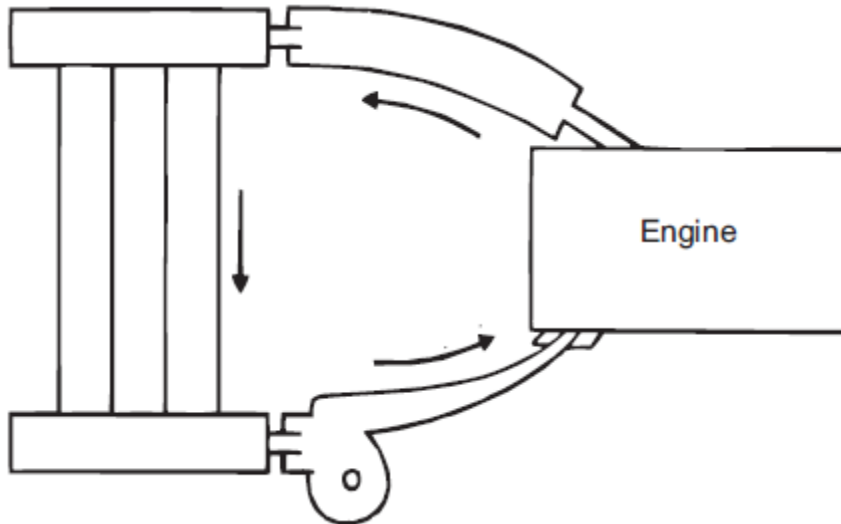

Performance Calculation:

Engine performance is an indication of the degree of success of the engine performs its assigned task, i.e. the conversion of the chemical energy contained in the fuel into the useful mechanical work. The performance of an engine is evaluated on the basis of the following :

- (a) Specific Fuel Consumption.
- (b) Brake Mean Effective Pressure.
- (c) Specific Power Output.
- (d) Specific Weight.
- (e) Exhaust Smoke and Other Emissions.

The particular application of the engine decides the relative importance of these performance parameters.

For Example : For an aircraft engine specific weight is more important whereas for an industrial engine specific fuel consumption is more important.

For the evaluation of an engine performance few more parameters are chosen and the effect of various operating conditions, design concepts and modifications on these parameters are studied. The basic performance parameters are the following :

- (a) Power and Mechanical Efficiency.
- (b) Mean Effective Pressure and Torque.
- (c) Specific Output.
- (d) Volumetric Efficiency.
- (e) Fuel-air Ratio.
- (f) Specific Fuel Consumption.
- (g) Thermal Efficiency and Heat Balance.
- (h) Exhaust Smoke and Other Emissions.
- (i) Specific Weight.

Power and Mechanical Efficiency

The main purpose of running an engine is to obtain mechanical power.

- Power is defined as the rate of doing work and is equal to the product of force and linear velocity or the product of torque and angular velocity.
- Thus, the measurement of power involves the measurement of force

(or torque) as well as speed. The force or torque is measured with the help of a dynamometer and the speed by a tachometer.

The power developed by an engine and measured at the output shaft is called the brake power (bp) and is given by

$$bp = 2\pi T n / 60$$

where, T is torque in N-m and N is the rotational speed in revolutions per minute.

The total power developed by combustion of fuel in the combustion chamber is, however, more than the bp and is called indicated power (ip). Of the power developed by the engine, i.e. ip, some power is consumed in overcoming the friction between moving parts, some in the process of inducting the air and removing the products of combustion from the engine combustion chamber.

Indicated Power

It is the power developed in the cylinder and thus, forms the basis of evaluation of combustion efficiency or the heat release in the cylinder.

Where,

$$I.P = P_m L A N k / 60$$

p_m = Mean effective pressure, N/m^2 ,

L = Length of the stroke, m,

A = Area of the piston, m^2 ,

N = Rotational speed of the engine, rpm (It is N/2 for four stroke engine), and

k = Number of cylinders.

Thus, we see that for a given engine the power output can be measured in terms of mean effective pressure.

The difference between the ip and bp is the indication of the power lost in the mechanical components of the engine (due to friction) and forms the basis of mechanical efficiency; which is defined as follows :

$$\text{Mechanical efficiency} = bp / ip$$

The difference between ip and bp is called friction power (fp).

$$F_p = ip - bp$$

$$\text{Mechanical efficiency} = b.p / (bp + fp)$$

Mean Effective Pressure and Torque

Mean effective pressure is defined as a hypothetical/average pressure which is assumed to be acting on the piston throughout the power stroke. Therefore,

$$P_m = 60 \text{Xi.P} / L A N k$$

where, P_m = Mean effective pressure, N/m^2 ,

I_p = Indicated power, Watt,

L = Length of the stroke, m,

A = Area of the piston, m^2 ,

N = Rotational speed of the engine, rpm (It is N/2 for four stroke engine),

and

k = Number of cylinders.

If the mean effective pressure is based on bp it is called the brake mean effective pressure(P_m), and if based on ihp it is called indicated mean effective pressure (imep). Similarly, the friction mean effective pressure (fmep) can be defined as,

$$fmep = imep - bmep$$

The torque is related to mean effective pressure by the relation

$$B.P = 2\pi \text{Int}/60$$

$$I.P = P_m L A N_k / 60$$

$$2\pi \text{Int}/60 = [b_{mep} \cdot A \cdot L \cdot (N_k/60)] \quad \text{or,}$$

$$T = (b_{mep} \cdot A \cdot L \cdot k) / 2\pi$$

Thus, the torque and the mean effective pressure are related by the engine size. A large engine produces more torque for the same mean effective pressure. For this reason, torque is not the measure of the ability of an engine to utilize its displacement for producing power from fuel. It is the mean effective pressure which gives an indication of engine displacement utilization for this conversion. Higher the mean effective pressure, higher will be the power developed by the engine for a given displacement. Again we see that the power of an engine is dependent on its size and speed. Therefore, it is not possible to compare engines on the basis of either power or torque. Mean effective pressure is the true indication of the relative performance of different engines.

Specific Output

Specific output of an engine is defined as the brake power (output) per unit of piston displacement and is given by,

$$\text{Specific output} = B.P / A.L$$

$$\text{Constant} = b_{mep} \times \text{rpm}$$

- The specific output consists of two elements – the b_{mep} (force) available to work and the speed with which it is working.
- Therefore, for the same piston displacement and b_{mep} an engine operating at higher speed will give more output.
- It is clear that the output of an engine can be increased by increasing either speed or b_{mep}. Increasing speed involves increase in the mechanical stress of various engine parts whereas increasing b_{mep} requires better heat release and more load on engine cylinder.

Volumetric Efficiency

Volumetric efficiency of an engine is an indication of the measure of the degree to which the engine fills its swept volume. It is defined as the ratio of the mass of air inducted into the engine cylinder during the suction stroke to the mass of the air corresponding to the swept volume of the engine at atmospheric pressure and temperature. Alternatively, it can be defined as the ratio of the actual volume inhaled during suction stroke measured at intake conditions to the swept volume of the piston.

Volumetric efficiency, $\eta_v = \frac{\text{Mass of charge actually sucked in}}{\text{Mass of charge corresponding to the cylinder intake}}$

The amount of air taken inside the cylinder is dependent on the volumetric efficiency of an engine and hence puts a limit on the amount of fuel which can be efficiently burned and the power output.

For supercharged engine the volumetric efficiency has no meaning as it comes out to be more than unity.

Fuel-Air Ratio (F/A)

Fuel-air ratio (F/A) is the ratio of the mass of fuel to the mass of air in the fuel-air mixture. Air-fuel ratio (A/F) is reciprocal of fuel-air ratio. Fuel-air ratio of the mixture affects the combustion phenomenon in that it determines the flame

propagation velocity, the heat release in the combustion chamber, the maximum temperature and the completeness of combustion. Relative fuel-air ratio is defined as the ratio of the actual fuel-air ratio to that of the stoichiometric fuel-air ratio required to burn the fuel supplied. Stoichiometric fuel-air ratio is the ratio of fuel to air is one in which case fuel is completely burned due to minimum quantity of air supplied.

Relative fuel-air ratio, $= (\text{Actual Fuel-Air ratio}) / (\text{Stoichiometric fuel-Air ratio})$

Brake Specific Fuel Consumption

Specific fuel consumption is defined as the amount of fuel consumed for each unit of brake power developed per hour. It is a clear indication of the efficiency with which the engine develops power from fuel.

B.S.F.C = Relative fuel-air ratio, $= (\text{Actual Fuel-Air ratio}) / (\text{Stoichiometric fuel-Air ratio})$

This parameter is widely used to compare the performance of different engines.

Thermal Efficiency and Heat Balance

Thermal efficiency of an engine is defined as the ratio of the output to that of the chemical energy input in the form of fuel supply. It may be based on brake or indicated output. It is the true indication of the efficiency with which the chemical energy of fuel (input) is converted into mechanical work. Thermal efficiency also accounts for combustion efficiency, i.e., for the fact that whole of the chemical energy of the fuel is not converted into heat energy during combustion.

Brake thermal efficiency $= B.P / m_f \cdot C_v$

where, C_v = Calorific value of fuel, Kj/kg, and
 m_f = Mass of fuel supplied, kg/sec.

- The energy input to the engine goes out in various forms – a part is in the form of brake output, a part into exhaust, and the rest is taken by cooling water and the lubricating oil.
- The break-up of the total energy input into these different parts is called the heat balance.
- The main components in a heat balance are brake output, coolant losses, heat going to exhaust, radiation and other losses.
- Preparation of heat balance sheet gives us an idea about the amount of energy wasted in various parts and allows us to think of methods to reduce the losses so incurred.

Exhaust Smoke and Other Emissions:

Smoke and other exhaust emissions such as oxides of nitrogen, unburned hydrocarbons, etc. are nuisance for the public environment. With increasing emphasis on air pollution control all efforts are being made to keep them as minimum as it could be.

Smoke is an indication of incomplete combustion. It limits the output of an engine if air pollution control is the consideration.

Emission Formation Mechanisms: (S.I)

This section discusses the formation of HC, CO, Nox, CO₂, and aldehydes and explains the effects of design parameters.

i. Hydrocarbon Emissions

HC emissions are various compounds of hydrogen, carbon, and sometimes oxygen. They are burned or partially burned fuel and/or oil. HC emissions contribute to photochemical smog, ozone, and eye irritation. There are several formation mechanisms for HC, and it is convenient to think about ways HC can avoid combustion and ways HC can be removed; we will discuss each below. Of course, most of the HC input is fuel, and most of it is burned during “normal” combustion. However, some HC avoids oxidation during this process.

The processes by which fuel compounds escape burning during normal S.I. combustion are:


1. Fuel vapor-air mixture is compressed into the combustion chamber crevice volumes.
2. Fuel compounds are absorbed into oil layers on the cylinder liner.
3. Fuel is absorbed by and/or contained within deposits on the piston head and piston crown.
4. Quench layers on the combustion chamber wall are left as the flame extinguishes close to the walls.
5. Fuel vapor-air mixture can be left unburned if the flame extinguishes before reaching the walls.
6. Liquid fuel within the cylinder may not evaporate and mix with sufficient air to burn prior to the end of combustion.
7. The mixture may leak through the exhaust valve seat.

(ii) Carbon Monoxide

Formation of CO is well established. Under some conditions, there is not enough O₂ available for complete oxidation and some of the carbon in the fuel ends up as CO. The amount of CO, for a range of fuel composition and C/H ratios, is a function of the relative air-fuel ratio.

Even when enough oxygen is present, high peak temperatures can cause dissociation – chemical combustion reactions in which carbon dioxide and water vapor separate into CO, H₂, and O₂.

Conversion of CO to CO₂ is governed by reaction



Dissociated CO may freeze during the expansion stroke.

(iii) Oxides of Nitrogen

Nox is a generic term for the compounds NO and NO₂. Both are present to some degree in the exhaust, and NO oxidizes to NO₂ in the atmosphere. Nox contributes to acid rain and photochemical smog; it is also thought to cause respiratory health problems at atmospheric concentrations found in some parts of the world. To understand Nox formation, we must recognize several factors that affect Nox equilibrium. Remember that all chemical reactions proceed toward equilibrium at some reaction rate. Equilibrium NO (which comprises most of the Nox formation) is formed at a rate that varies strongly with temperature and equivalence ratio.

(iv) Carbon Dioxide

While not normally considered a pollutant, CO₂ may contribute to the greenhouse effect. Proposals to reduce CO₂ emissions have been made. CO₂ controls strongly influence fuel economy requirements.

(v) Aldehydes

Aldehydes are the result of partial oxidation of alcohols. They are not usually present in significant quantities in gasoline-fueled engines, but they are an issue when alcohol fuels are used. Aldehydes are thought to cause lung problems. So far, little information of engine calibration effects on aldehyde formation is available.

Emission Formation In C.I. Engine

For many years, diesel engines have had a reputation of giving poor performance and producing black smoke, an unpleasant odor, and considerable noise. However, it would find it difficult to distinguish today's modern diesel car from its gasoline counterpart. For diesel engines the emphasis is to reduce emissions of Nox and particulates, where these emissions are typically higher than those from equivalent port injected gasoline engines equipped with three-way catalysts. Catalyst of diesel exhaust remains a problem insofar as research has not yet been able to come up with an effective converter that eliminates both particulate matter (PM) and oxide of nitrogen (Nox).

Principle C.I. Engine Exhaust Constituents

For many years, diesel engines have had a reputation of giving poor performance and producing black smoke, an unpleasant odor, and considerable noise. However, it would find it difficult to distinguish today's modern diesel car from its gasoline counterpart. Concerning CO and HC emissions, diesel engines have an inherent advantages, therefore the emphasis is to reduce emissions of Nox and particulates, where these emissions are typically higher than those from equivalent port injected gasoline engines equipped with three-way catalysts. Catalyst of diesel exhaust remains a problem insofar as research has not yet been able to come up with an effective converter that eliminates both particulate matter (PM) and oxide of nitrogen (Nox).

In the same manner as with SI engines, the air/fuel ratio of the diesel engine has a significant impact on the level of pollutant concentrations but this parameter is not freely available for minimizing pollution.

Problems:

To determine Brake power, Indicated Power, Frictional Power, Brake Thermal Efficiency, Indicated Thermal Efficiency, Mechanical Efficiency, Relative Efficiency, Volumetric Efficiency, Brake Specific Fuel Consumption, Indicated Specific Fuel Consumption, Indicated mean effective pressure, Brake mean effective pressure.

Sample problems:

1. Following data relates to 4 cylinder, single stroke petrol engine. A/F ratio by weight 16:1. Calorific value of the fuel= 45200 Kj/kg, mechanical efficiency=82%. Air standard efficiency=52%, relative efficiency=70%, volumetric efficiency=78%, L/D=1.25, suction condition=1 bar, 25°C. Speed=2400 rpm and power at brakes=72kw. Calculate
 1. Compression ratio
 2. Indicated Thermal Efficiency
 3. Brake specific fuel consumption
 4. Bore and Stroke.
2. A six cylinder, 4 stroke SI engine having a piston displacement of 700cm³ per cylinder developed 78Kw at 3200 rpm and consumed 27 kg of petrol per hour. The calorific value of the fuel is 44MJ/kg. Estimate
 1. The volumetric efficiency of the engine if the air-fuel ratio is 12 and intake air is at 0.9bar, 32°C.
 2. Brake thermal efficiency and brake torque. For air R=0.287 Kj/kgK.

UNIT-III**STEAM NOZZLES AND TURBINES****Syllabus:**

Flow of steam through nozzles, shapes of nozzles, effect of friction, critical pressure ratio, supersaturated flow, Impulse and Reaction principles, compounding, velocity diagram for simple and multi-stage turbines, speed regulations –Governors.

Flow of steam through nozzles :

- The flow of steam through nozzles may be regarded as adiabatic expansion.
- The steam has a very high velocity at the end of the expansion, and the enthalpy decreases as expansion takes place.
- Friction exists between the steam and the sides of the nozzle; heat is produced as the result of the resistance to the flow.
- The phenomenon of supersaturation occurs in the flow of steam through nozzles. This is due to the time lag in the condensation of the steam during the expansion.

Continuity and steady flow energy equations

Through a certain section of the nozzle:

$$m.v = A.C$$

m is the mass flow rate, v is the specific volume, A is the cross-sectional area and C is the velocity.

For steady flow of steam through a certain apparatus, principle of conservation of energy states:

$$h_1 + C_1^2/2 + gz_1 + q = h_2 + C_2^2/2 + gz_2 + w$$

For nozzles, changes in potential energies are negligible, $w = 0$ and $q \cong 0$.


$$H_1 + C_1^2/2 = h_2 + C_2^2/2$$

Types of Nozzles:

1. Convergent Nozzle
2. Divergent Nozzle
3. Convergent-Divergent Nozzle


Convergent Nozzle

A typical convergent nozzle is shown in the Fig.16.1. In a convergent nozzle, the cross sectional area decreases continuously from its entrance to exit. It is used in a case where the back pressure is equal to or greater than the critical pressure ratio (which will be defined later).

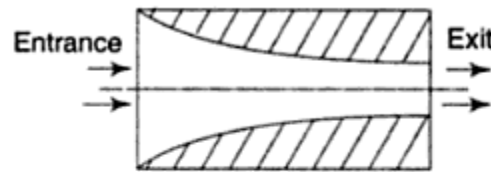


Divergent nozzle

The cross sectional area of divergent nozzle increases continuously from its entrance to exit. It is used in a case where the back pressure is less than the critical pressure ratio.

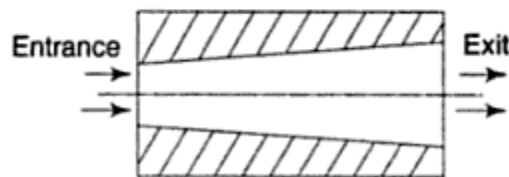

Convergent-Divergent Nozzle

In this case, the cross sectional area first decreases from its entrance to throat and then increases from throat to exit. This case is also used in the case where the back pressure is less than the critical pressure. Also, in present day application, it is widely used in many types of steam turbines.

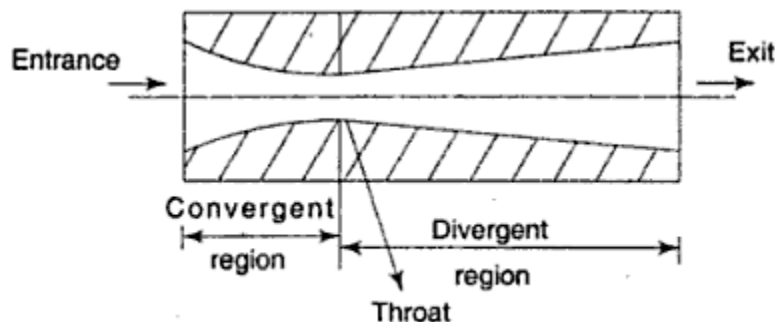


Supersaturated flow or Metastable flow in Nozzles :

As steam expands in the nozzle, its pressure and temperature drop, and it is expected that the steam start condensing when it strikes the saturation line. But this is not always the case. Owing to the high velocities, the residence time of the steam in the nozzle is small, and there may not sufficient time for the necessary heat transfer and the formation of liquid droplets. Consequently, the condensation of steam is delayed for a little while. This phenomenon is known as supersaturation, and the steam that exists in the wet region without containing any liquid is known as supersaturated steam.

The locus of points where condensation will take place regardless of the initial temperature and pressure at the nozzle entrance is called the Wilson line. The Wilson line lies between 4 and 5 percent moisture curves in the saturation region on the h-s diagram for steam, and is often

approximated by the 4 percent moisture line. The supersaturation phenomenon is shown on the h - s chart below:

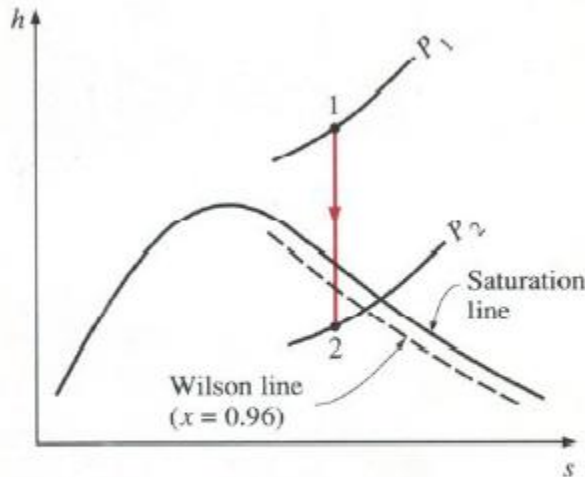

The h - s diagram for the isentropic expansion of steam in a nozzle.

Effects of Supersaturation:


The following are the effects of supersaturation in a **nozzle**.

- The temperature at which the supersaturation occurs will be less than the saturation temperature corresponding to that pressure. Therefore, the density of supersaturated steam will be more than that of equilibrium condition which gives the increase in the mass of steam discharged.
- Supersaturation increases the specific volume and entropy of the steam.
- Supersaturation reduces the heat drop. Thus the exit velocity of steam is reduced.
- Supersaturation increases the dryness fraction of the steam.

Critical Pressure Ratio:

The critical pressure ratio is the pressure ratio which will accelerate the flow to a velocity equal to the local velocity of sound in the fluid.

Critical flow nozzles are also called **sonic chokes**. By establishing a shock wave the sonic choke establish a fixed flow rate unaffected by the differential pressure, any fluctuations or changes in downstream pressure. A sonic choke may provide a simple way to regulate a gas flow.

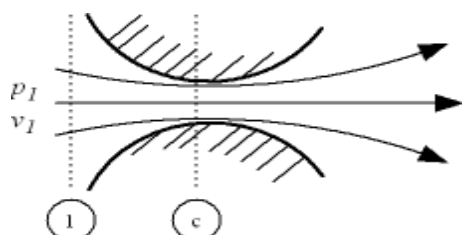

The ratio between the critical pressure and the initial pressure for a nozzle can be expressed as

$$p_c / p_1 = (2 / (n + 1))^{n / (n - 1)}$$

where

p_c = critical pressure (Pa)

p_1 = inlet pressure (Pa)

n = index of isentropic expansion or compression – or polytropic constant

For a perfect gas undergoing an adiabatic process the index – n – is the ratio of specific heats – $k = c_p / c_v$. There is no unique value for – n . Values for some common gases are


- Steam where most of the process occurs in the wet region : $n = 1.135$
- Steam superheated : $n = 1.30$
- Air : $n = 1.4$
- Methane : $n = 1.31$
- Helium : $n = 1.667$

Effect of Friction on Nozzles:

- 1) Entropy is increased.
- 2) Available energy is decreased.
- 3) Velocity of flow at throat is decreased.
- 4) Volume of flowing steam is decreased.
- 5) Throat area necessary to discharge a given mass of steam is increased.

Most of the **friction** occurs in the diverging part of a convergent-divergent **nozzle** as the length of the converging part is very small. The **effect** of **friction** is to reduce the available enthalpy drop by about 10 to 15 per cent. The velocity of steam will be then $V_2 = 44.72\sqrt{K(H_1 - H_2)}$ where K is the coefficient which allows for **friction** loss. It is also known as **nozzle** efficiency (η_n)

$$\therefore V_2 = 44.72\sqrt{(H_1 - H_2)\eta_n}$$

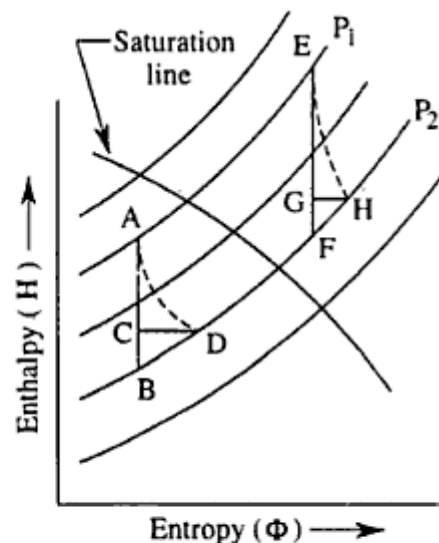

Velocity of steam at nozzle exit:

$$V_2^2 = 2000(H_1 - H_2) + V_1^2 \quad \therefore \quad V_2 = \sqrt{2000(H_1 - H_2) + V_1^2}$$

As the velocity of steam entering the **nozzle** is very small, V_1 can be neglected.

$$\therefore \quad V_2 = \sqrt{2000(H_1 - H_2)} = 44.72\sqrt{(H_1 - H_2)} \text{ m/s}$$

If frictional losses are taken into account then

$$V_2 = 44.72\sqrt{(H_1 - H_2)\eta_n} \text{ m/s}$$

Mass of steam discharged through a nozzle:

$$m = A \sqrt{2000 \frac{n}{n-1} \times \frac{P_1}{v_1} \left[\left(\frac{P_2}{P_1} \right)^{\frac{2}{n}} - \left(\frac{P_2}{P_1} \right)^{\frac{n+1}{n}} \right]}$$

Condition for maximum discharge through nozzle:

The nozzle is always designed for maximum discharge

$$\frac{m}{A} = \sqrt{2000 \frac{n}{n-1} \times \frac{P_1}{v_1} \left[\left(\frac{P_2}{P_1} \right)^{\frac{2}{n}} - \left(\frac{P_2}{P_1} \right)^{\frac{n+1}{n}} \right]}$$

The mass flow per unit area will be maximum at the throat because the throat area is minimum.

It is seen from the above equation that the discharge through a **nozzle** is a function of $\frac{P_2}{P_1}$ only, as the expansion index is fixed according to the steam supplied to the **nozzle**.

Therefore, $\frac{m}{A}$ is maximum when

$$\left[\left(\frac{P_2}{P_1} \right)^{\frac{2}{n}} - \left(\frac{P_2}{P_1} \right)^{\frac{n+1}{n}} \right] \text{ is minimum}$$

Values for maximum discharge:

$$m = A \sqrt{2000 \frac{n}{n-1} \times \frac{P_1}{v_1} \left[\left(\frac{P_2}{P_1} \right)^{\frac{2}{n}} - \left(\frac{P_2}{P_1} \right)^{\frac{n+1}{n}} \right]}$$

we know $\frac{P_2}{P_1} = \left(\frac{2}{n+1} \right)^{\frac{n}{n-1}}$

Putting the value of $\frac{P_2}{P_1}$ in the above equation

$$m_{\max} = A \sqrt{2000 \frac{n}{n-1} \times \frac{P_1}{v_1} \left[\left(\frac{2}{n+1} \right)^{\frac{2}{n-1}} - \left(\frac{2}{n+1} \right)^{\frac{n+1}{n-1}} \right]}$$

$$m_{\max} = A \sqrt{2000 \frac{n}{n-1} \times \frac{P_1}{v_1} \times \left(\frac{2}{n+1} \right)^{\frac{n+1}{n-1}} \left[\left(\frac{2}{n+1} \right)^{\frac{2}{n-1} - \frac{n+1}{n-1}} - 1 \right]}$$

$$= A \sqrt{2000 \frac{n}{n-1} \times \frac{P_1}{v_1} \times \left(\frac{2}{n+1} \right)^{\frac{n+1}{n-1}} \left[\left(\frac{2}{n+1} \right)^{\frac{1-n}{n-1}} - 1 \right]}$$

$$= A \sqrt{2000 \frac{n}{n-1} \times \frac{P_1}{v_1} \times \left(\frac{2}{n+1} \right)^{\frac{n+1}{n-1}} \left[\left(\frac{2}{n+1} \right)^{-1} - 1 \right]}$$

$$= A \sqrt{2000 \frac{n}{n-1} \times \frac{P_1}{v_1} \times \left(\frac{2}{n+1} \right)^{\frac{n+1}{n-1}} \left[\frac{n+1}{2} - 1 \right]}$$

$$= A \sqrt{2000 \frac{n}{n-1} \times \frac{P_1}{v_1} \times \left(\frac{2}{n+1} \right)^{\frac{n+1}{n-1}} \left(\frac{n-1}{2} \right)}$$


$$m_{\max} = A \sqrt{1000n \times \frac{P_1}{v_1} \times \left(\frac{2}{n+1} \right)^{\frac{n+1}{n-1}}}$$

Where P_1 is the initial pressure of the steam in kpa and v_1 is the specific volume of the steam in m^3/kg at the initial pressure.

STEAM TURBINES:

Normally the turbines are classified into types,

1. Impulse Turbine
2. Reaction Turbine

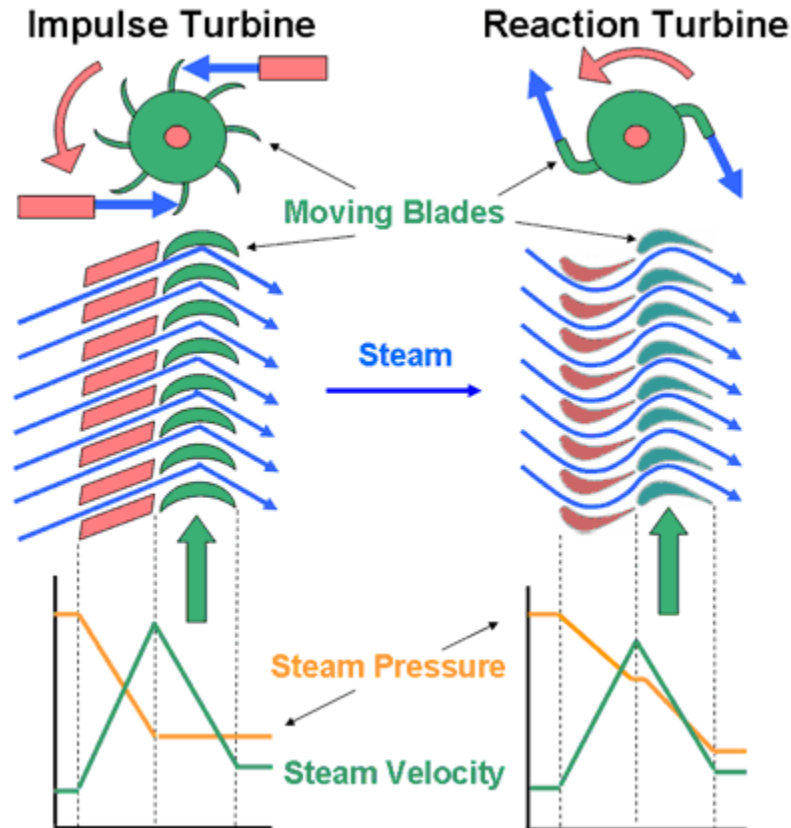Impulse and Reaction Turbines:**Impulse Turbines**


The steam jets are directed at the turbine's bucket shaped rotor blades where the pressure exerted by the jets causes the rotor to rotate and the velocity of the steam to reduce as it imparts its kinetic energy to the blades. The blades in turn change the direction of flow of the steam however its pressure remains constant as it passes through the rotor blades since the cross section of the chamber between the blades is constant. Impulse turbines are therefore also known as constant pressure turbines.

The next series of fixed blades reverses the direction of the steam before it passes to the second row of moving blades.

Reaction Turbines

The rotor blades of the reaction turbine are shaped more like aerofoils, arranged such that the cross section of the chambers formed between the fixed blades diminishes from the inlet side towards the exhaust side of the blades. The chambers between the rotor blades essentially form nozzles so that as the steam progresses through the chambers its velocity increases while at the

same time its pressure decreases, just as in the nozzles formed by the fixed blades. Thus the pressure decreases in both the fixed and moving blades. As the steam emerges in a jet from between the rotor blades, it creates a reactive force on the blades which in turn creates the turning moment on the turbine rotor, just as in Hero's steam engine. (Newton's Third Law – For every action there is an equal and opposite reaction)

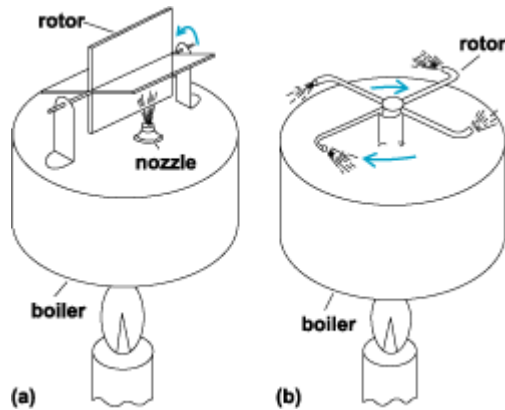

Compounding of impulse turbine :

- This is done to reduce the rotational speed of the impulse turbine to practical limits.


(A rotor speed of 30,000 rpm is possible, which is pretty high for practical uses.)

- Compounding is achieved by using more than one set of nozzles, blades, rotors, in a series, keyed to a common shaft; so that either the steam pressure or the jet velocity is absorbed by the turbine in stages.

- Three main types of compounded impulse turbines are:

a) Pressure compounded, b) velocity compounded and c) pressure and velocity compounded impulse turbines.

1.Velocity Compounding:

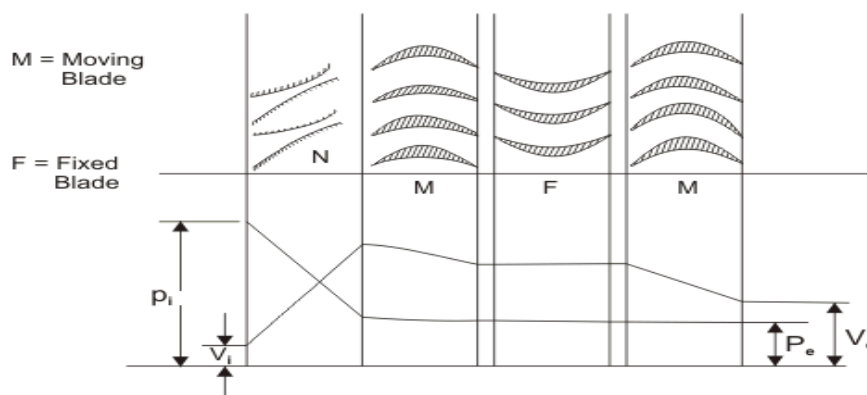


P_i = Inlet Pressure

P_e = Exit Pressure

V_i =Inlet Velocity V_e =Exit Velocity

The velocity-compounded impulse turbine was first proposed by C.G. Curtis to solve the problems of a single-stage impulse turbine for use with high pressure and temperature steam. The Curtis stage turbine, as it came to be called, is composed of one stage of nozzles as the single-stage turbine, followed by two rows of moving blades instead of one. These two rows are separated by one row of fixed blades attached to the turbine stator, which has the function of redirecting the steam leaving the first row of moving blades to the second row of moving blades. A Curtis stage impulse turbine is shown in Fig. with schematic pressure and absolute steam-velocity changes through the stage. In the Curtis stage, the total enthalpy drop and hence pressure drop occur in the nozzles so that the pressure remains constant in all three rows of blades.


2. Pressure Compounding:

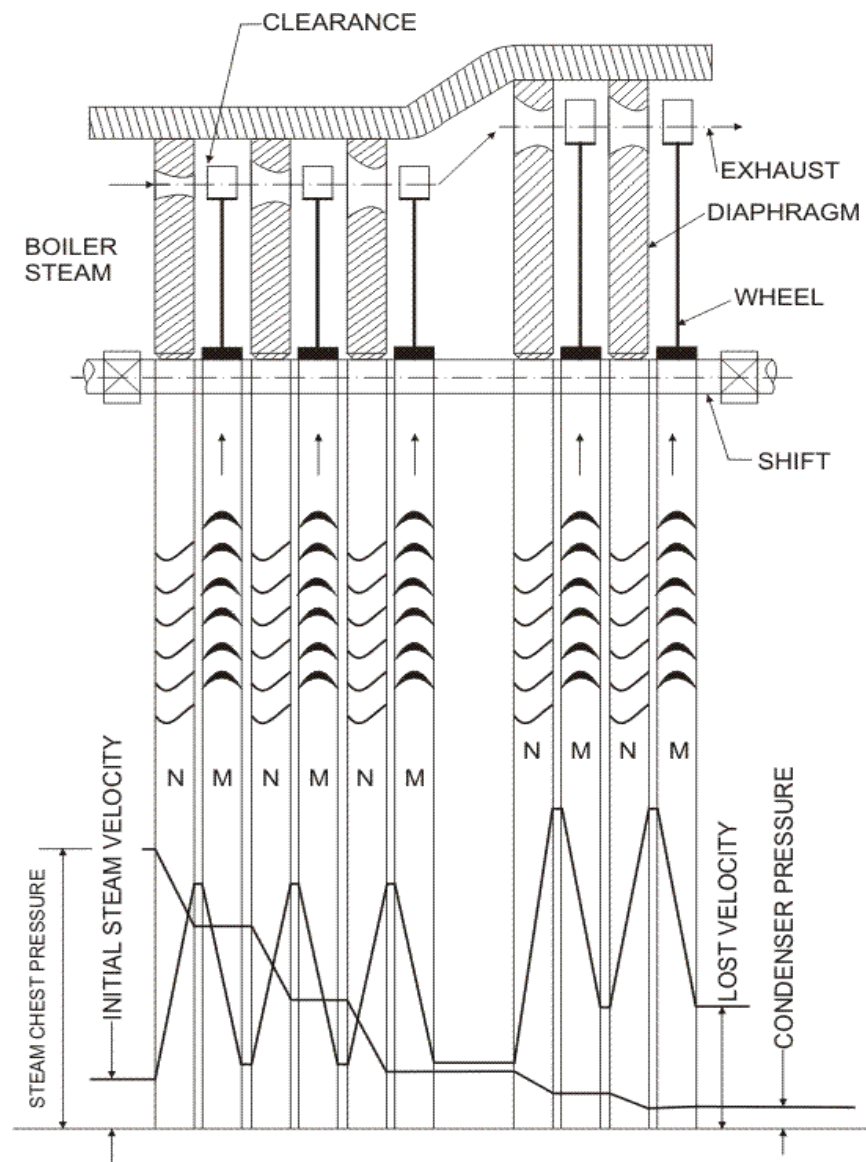

- This involves splitting up of the whole pressure drop from the steam chest pressure to the condenser pressure into a series of smaller pressure drops across several stages of impulse turbine.
- The nozzles are fitted into a diaphragm locked in the casing. This diaphragm separates one wheel chamber from another. All rotors are mounted on the same shaft and the blades are attached on the rotor.


3. Pressure-Velocity Compounding


This is a combination of pressure and velocity compounding.

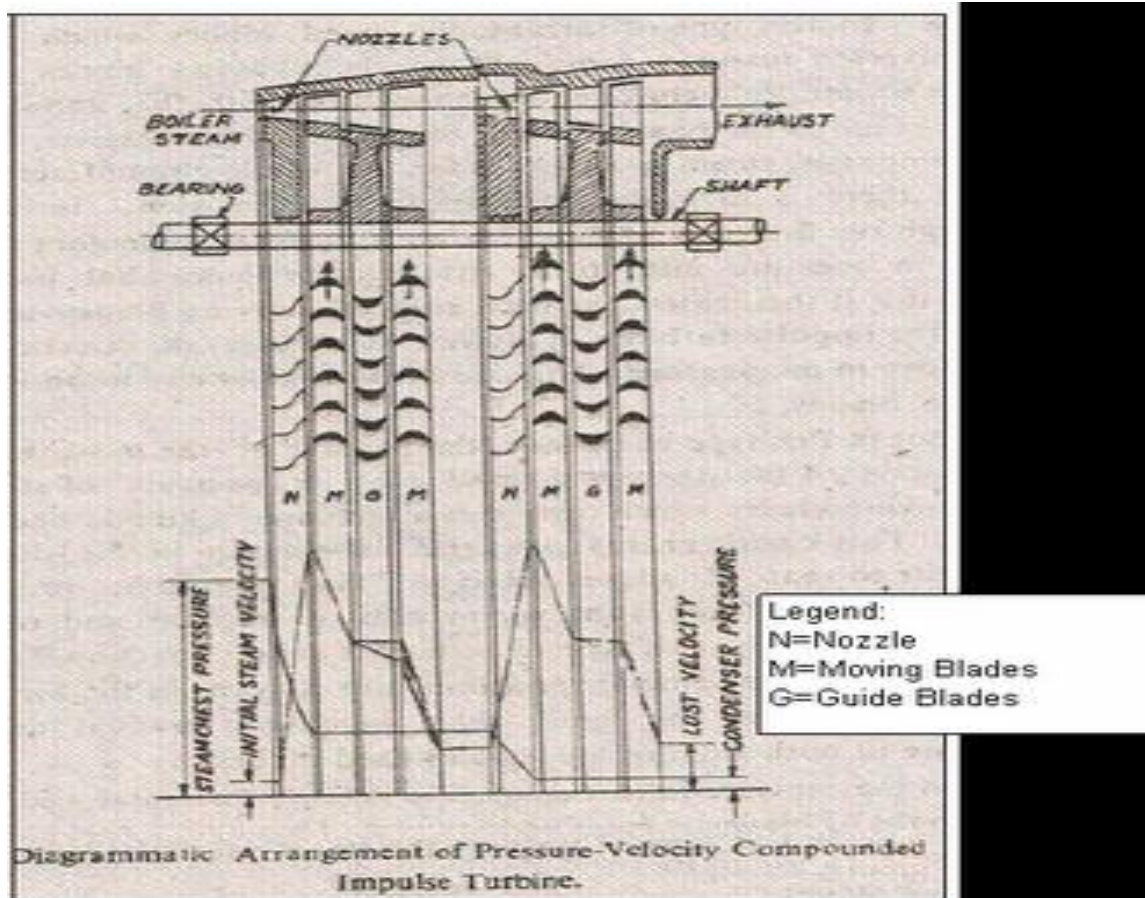

A two-row velocity compounded turbine is found to be more efficient than the three-row type. In a two-step pressure velocity compounded turbine, the first pressure drop occurs in the first set of nozzles, the resulting gain in the kinetic energy is absorbed successively in two rows of moving blades before the second pressure drop occurs in the second set of nozzles. Since the kinetic energy gained in each step is absorbed completely before the next pressure drop, the turbine is pressure compounded and as well as velocity compounded. The kinetic energy gained due to the second pressure drop in the second set of nozzles is absorbed successively in the two rows of moving blades. The pressure velocity compounded steam turbine is comparatively simple in construction and is much more compact than the pressure compounded turbine.

Velocity diagram of an impulse turbine:

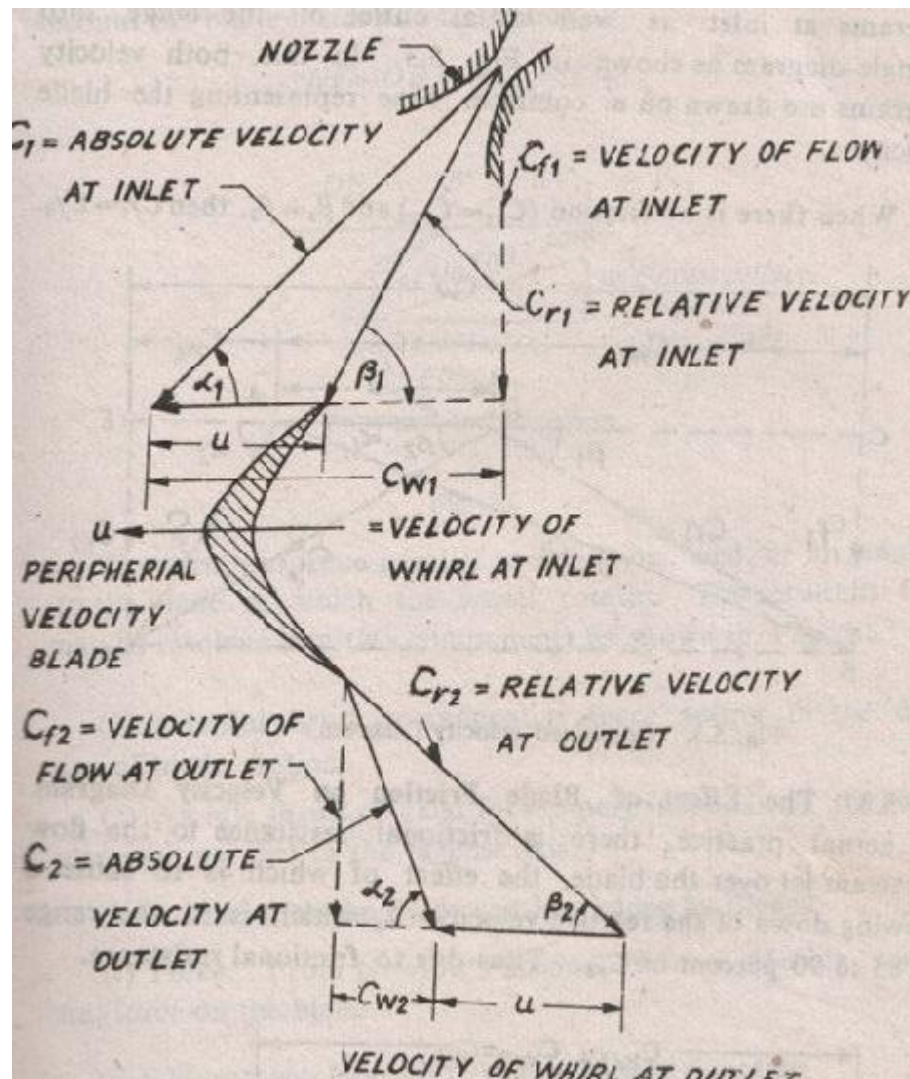

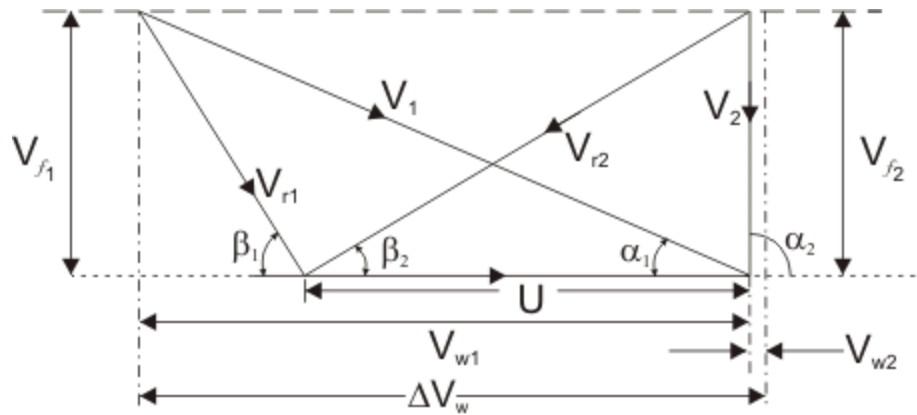

V_1 and V_2 = Inlet and outlet absolute velocity

V_{r1} and V_{r2} = Inlet and outlet relative velocity (Velocity relative to the rotor blades.)

U = mean blade speed

α_1 = nozzle angle, α_2 = absolute fluid angle at outlet

It is to be mentioned that all angles are with respect to the tangential velocity (in the direction of U)

β_1 and β_2 = Inlet and outlet **blade angles**

V_{w1} and V_{w2} = Tangential or whirl component of absolute velocity at inlet and outlet

V_{f1} and V_{f2} = Axial component of velocity at inlet and outlet

Tangential force on a blade,

$$F_u = \dot{m} (V_{w1} - V_{w2})$$

(mass flow rate X change in velocity in tangential direction)

or,

$$F_u = \dot{m} \Delta V_w$$

$$\text{Power developed} = \dot{m} U \Delta V_w$$

Blade efficiency or Diagram efficiency or Utilization factor is given by

$$\eta_b = \frac{\dot{m} \cdot U \cdot \Delta V_w}{\dot{m}(V_1^2/2)} = \frac{\text{Workdone}}{\text{K.E supplied}}$$

Or,

$$\begin{aligned} \eta_b &= \frac{2U\Delta V_w}{V_1^2} \\ \text{stage efficiency } \eta_s &= \frac{\text{Work done by the rotor}}{\text{Isentropic enthalpy drop}} \\ \eta_s &= \frac{\dot{m} U \Delta V_w}{\dot{m}(\Delta H)_{isen}} = \frac{\dot{m} U \Delta V_w}{\dot{m} \left(\frac{V_1^2}{2} \right)} \cdot \frac{\dot{m}(V_1^2/2)}{\dot{m}(\Delta H)_{isen}} \\ \text{or,} \quad \eta_s &= \eta_b \times \eta_n \quad [\eta_n = \text{Nozzle efficiency}] \end{aligned}$$

Optimum blade speed of a single stage turbine

$$\begin{aligned} \Delta V_w &= V_{r1} \cos \beta_1 + V_{r2} \cos \beta_2 \\ &= V_{r1} \cos \beta_1 + \left(1 + \frac{V_{r2}}{V_{r1}} \cdot \frac{\cos \beta_2}{\cos \beta_1} \right) \\ &= (V_1 \cos \alpha_1 - U) + (1 + kc) \end{aligned}$$

where, $k = (V_{r2}/V_{r1})$ = friction coefficient

$$c = (\cos \beta_2 / \cos \beta_1)$$

$$\begin{aligned} \eta_b &= \frac{2U \Delta V_w}{V_1^2} = 2 \frac{U}{V_1} \left(\cos \alpha_1 - \frac{U}{V_1} \right) (1 + kc) \\ \rho &= \frac{U}{V_1} = \frac{\text{Blade speed}}{\text{Fluid velocity at the blade inlet}} = \text{Blade speed ratio} \end{aligned}$$

$$\eta_b \text{ is maximum when } \frac{d\eta_b}{d\rho} = 0 \quad \text{also} \quad \frac{d^2\eta_b}{d\rho} = -4(1+kc)$$

$$\text{or,} \quad \frac{d}{d\rho} \{ 2(\rho \cos \alpha_1 - \rho^2)(1+kc) \} = 0$$

$$\text{or,} \quad \rho = \frac{\cos \alpha_1}{2}$$

α_1 is of the order of 18° to 22°

$$\text{Now,} \quad (\rho)_{opt} = \left(\frac{U}{V_1} \right)_{opt} = \frac{\cos \alpha_1}{2} \quad (\text{For single stage impulse turbine})$$

\therefore The maximum value of blade efficiency

$$\begin{aligned} (\eta_b)_{\max} &= 2(\rho \cos \alpha_1 - \rho^2)(1+kc) \\ &= \frac{\cos^2 \alpha_1}{2}(1+kc) \end{aligned}$$

For equiangular blades,

$$(\eta_b)_{\max} = \frac{\cos^2 \alpha_1}{2}(1+k)$$

If the friction over blade surface is neglected

$$(\eta_b)_{\max} = \cos^2 \alpha_1$$

The fixed blades are used to guide the outlet steam/gas from the previous stage in such a manner so as to smooth entry at the next stage is ensured.


K, the blade velocity coefficient may be different in each row of blades

$$\text{Work done} = \dot{m} \cdot U (\Delta V_{w1} + \Delta V_{w2})$$

$$\text{End thrust} = \dot{m}(\Delta V_{f1} + \Delta V_{f2})$$

The optimum velocity ratio will depend on number of stages and is given by $P_{opt} = \frac{\cos \alpha_{11}}{2n}$

Velocity diagram of the velocity compounded turbines:

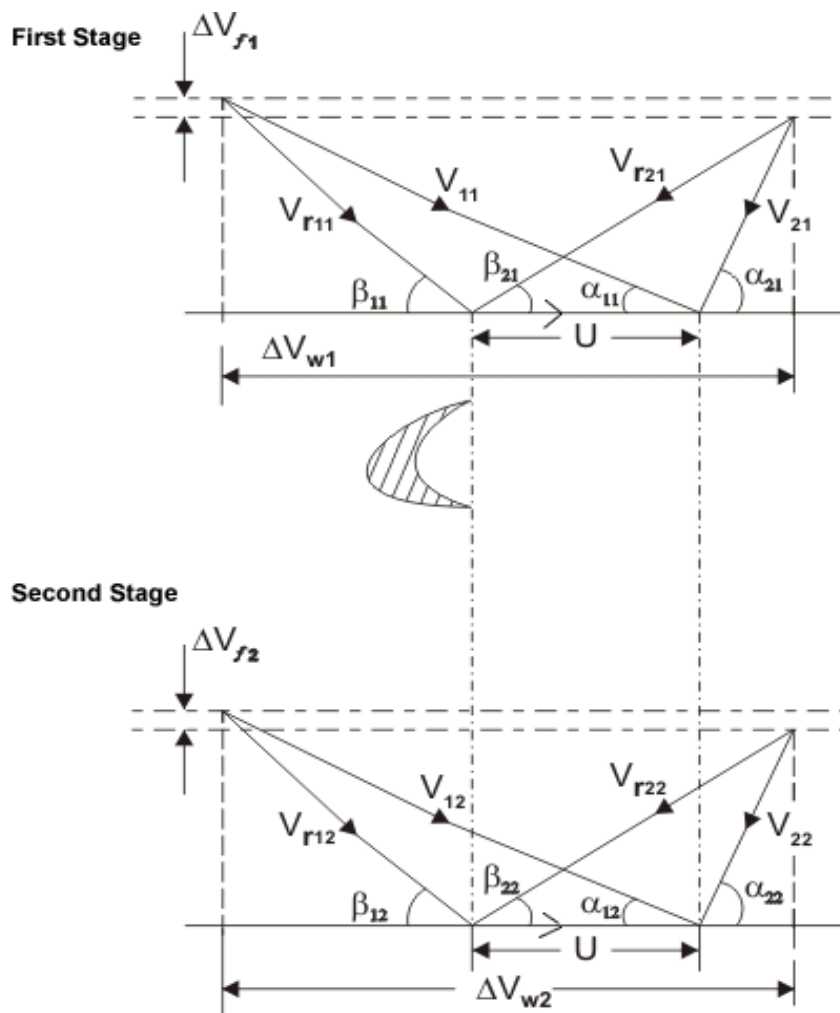


Reaction Turbine:

A **reaction turbine**, therefore, is one that is constructed of rows of fixed and rows of moving blades. The fixed blades act as nozzles. The moving blades move as a result of the impulse of steam received (caused by change in momentum) and also as a result of expansion and

acceleration of the steam relative to them. In other words, they also act as nozzles. The enthalpy drop per stage of one row fixed and one row moving blades is divided among them, often equally. Thus a blade with a 50 percent degree of reaction, or a 50 percent reaction stage, is one in which half the enthalpy drop of the stage occurs in the fixed blades and half in the moving blades. The pressure drops will not be equal, however. They are greater for the fixed blades and greater for the high-pressure than the low-pressure stages.


The moving blades of a reaction turbine are easily distinguishable from those of an impulse turbine in that they are not symmetrical and, because they act partly as nozzles, have a shape similar to that of the fixed blades, although curved in the opposite direction. The schematic pressure line in figure shows that pressure continuously drops through all rows of blades, fixed and moving. The absolute steam velocity changes within each stage as shown and repeats from stage to stage. The second figure shows a typical velocity diagram for the reaction stage.

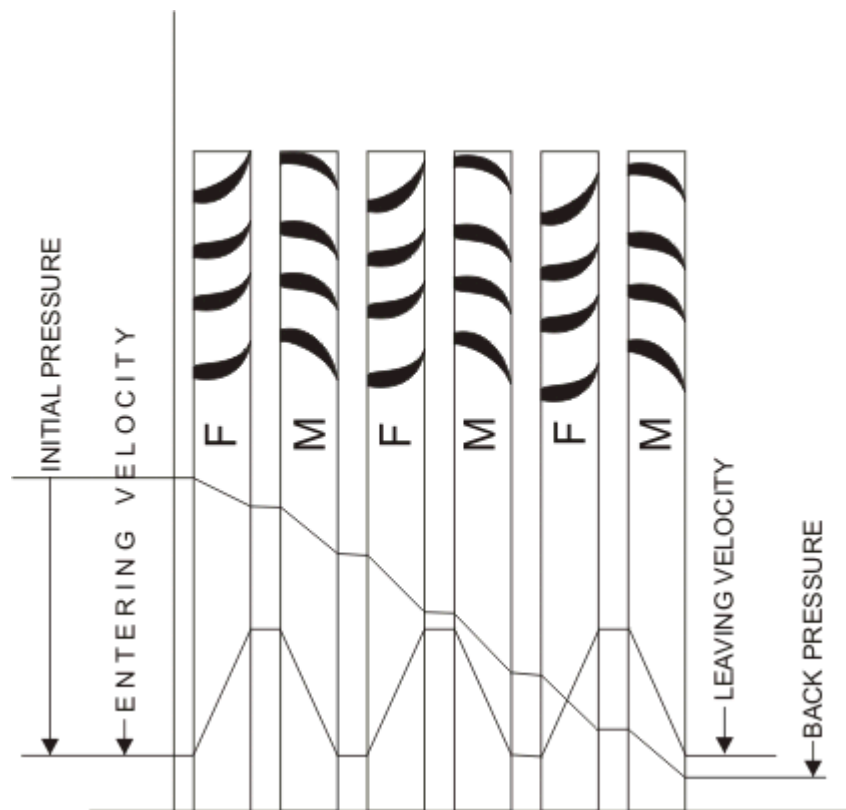

Pressure and enthalpy drop both in the fixed blade or **stator** and in the moving blade or **Rotor**

$$\text{Degree of Reaction} = \frac{\text{Enthalpy drop in Rotor}}{\text{Enthalpy drop in Stage}}$$

$$\text{or, } R = \frac{h_1 - h_2}{h_0 - h_1}$$

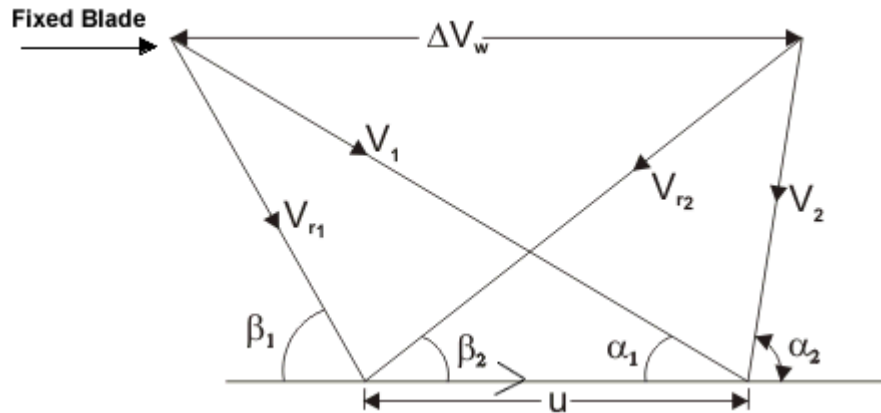

A very widely used design has half degree of reaction or 50% reaction and this is known as Parson's Turbine. This consists of symmetrical stator and rotor blades.

The velocity triangles are symmetrical and we have

$$\alpha_1 = \beta_2 \quad , \quad \beta_1 = \alpha_2$$

$$V_1 = V_{r2} \quad , \quad V_{r1} = V_2$$

Energy input per stage (unit mass flow per second)

$$E = \frac{V_1^2}{2} + \frac{V_{r2}^2 - V_{r1}^2}{2}$$

$$E = V_1^2 - \frac{V_{r1}^2}{2}$$

$$E = V_1^2 - \frac{V_1^2}{2} - \frac{U^2}{2} + \frac{2V_1U \cos \alpha_1}{2}$$

$$E = (V_1^2 - U^2 + 2V_1U \cos \alpha_1)/2$$

From the inlet velocity triangle we have,

$$V_{r1}^2 = V_1^2 - U^2 - 2V_1U \cos \alpha_1$$


Work done (for unit mass flow per second) $= W = U \Delta V_w$

$$= U(2V_1 \cos \alpha_1 - U)$$

Therefore, the Blade efficiency

Let us consider an instant when the load on the turbine increases. As a result the speed of the turbine decreases. The fly balls of the governor will come down. The fly balls bring down the sleeve. The downward movement of the sleeve will raise the control valve rod. The mouth of the pipe AA will open. Now the oil under pressure will rush from the control valve to the right side of the piston in the relay cylinder through the pipe AA. This will move the piston and spear towards the left which will open more area of **nozzle**. As a result the steam flow rate into the turbine increases, which in turn brings the speed of the turbine to the normal range.

2.Nozzle Governing:

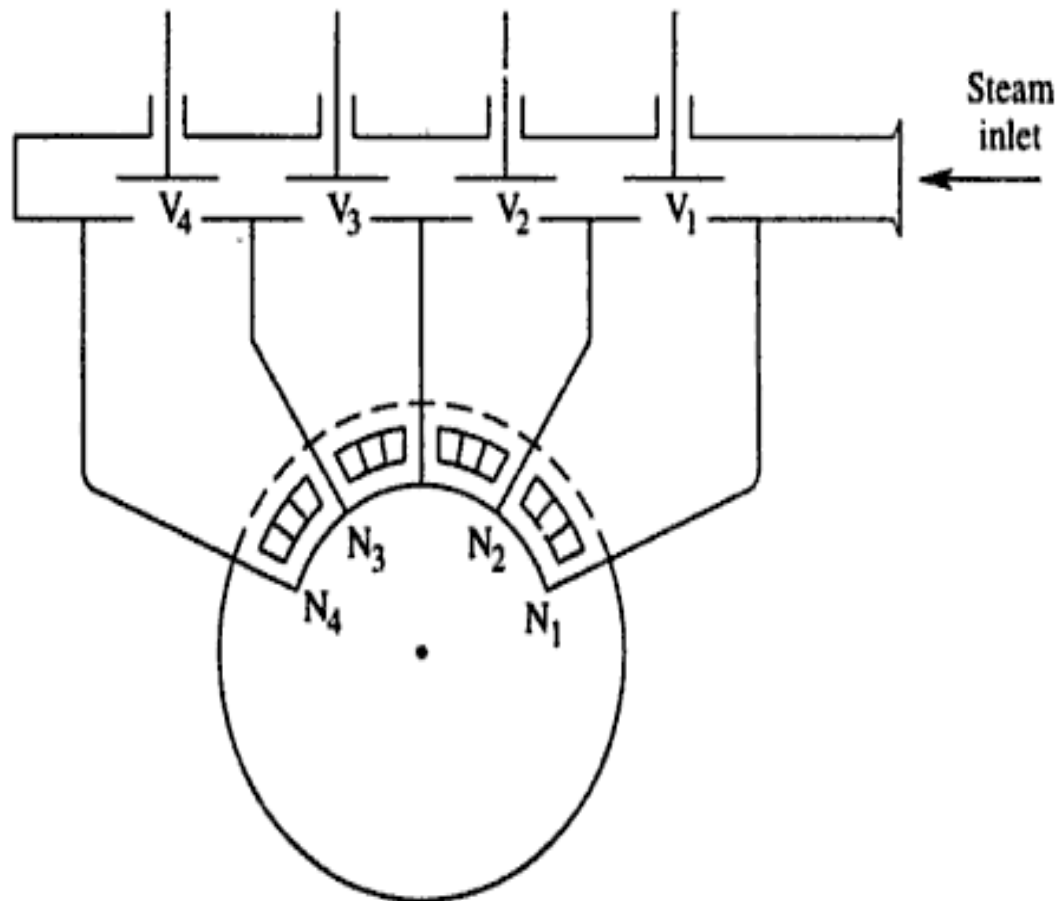

A diagrammatic arrangement of **nozzle** control governing is shown in Fig.

In this nozzles are grouped together in 3 to 5 or more groups and each group of **nozzle** is supplied steam controlled by valves. The arc of admission is limited to 180° or less. The **nozzle** control governing is restricted to the first stage of the turbine, the **nozzle** area in other stages remaining constant. It is suitable for the simple impulse turbine and for larger units which have an impulse stage followed by an impulse reaction turbine.

Bypass Governing

The high pressure impulse turbines generally have a number of stages of small mean diameter of wheel. These turbines are generally designed for maximum efficiency at an economic load which is about 80 per cent of the maximum continuous rating. Due to the small heat drop in the first stage **nozzle** control governing cannot be efficiently used. Secondly it is desirable to have full admission into high pressure stage at the rated economic load to eliminate the partial admission losses.

In such cases bypass governing is used.

In this arrangement for high loads a bypass line is provided for the steam from the first stage **nozzle** box into a later stage where work output increases. The bypass of steam is automatically regulated by the lift of the valve. The bypass valve is under the control of the speed of the governor for all loads within its range. In later stages though there is increase in work output, the efficiency is low due to throttling **effect**.

Sample Problems on Steam Nozzle:

1. Steam at pressure of 1.5 Mpa and temperature of 260°C expands isentropically in a steam nozzle to a pressure 500 kPa with an actual enthalpy drop of 200 KJ/kg. If the nozzle outlet area is approximately 4 cm^2 and mass flow rate is 10 kg/s, calculate the number of nozzles required and adjust the outlet dimensions to suit this number.
2. Dry saturated steam at 10 bar pressure enters a convergent nozzle which is having 10mm throat diameter and 12 mm divergent portion length. Determine the diameter at the nozzle exit and cone angle of the divergent portion so that the steam may leave at 1 bar pressure. Assume the effects of Friction are negligible.
3. Steam at pressure of 22 bar and temperature 300°C is supplied to a group of five nozzles at the rate of 4.5 kg/s. The exit pressure of steam is 3 bar. Determine the following:
 - i. The dimensions of the nozzles of rectangular cross section with an aspect ratio of 3:1. Neglect the friction effect and assume the expansion is metastable.
 - ii. Degree of Under cooling and Supersaturation.

- iii. The loss in available heat drop due to irreversibility
- iv. Change in entropy

Sample problems on Steam Turbine:


1. Steam at a velocity of 1000m/s enters a De-Laval turbine at an angle of 20° to a plane of the blade. The steam flow rate through the turbine is 1000 kg/hr and the mean blade velocity is 350m/s. If the inlet and outlet blade angles are equal, determine i. relative velocity of steam at the inlet of the blades, ii. Blade angles, iii. Tangential force acting on the blades, iv. Power developed and v. Blade Efficiency. Take the blade velocity coefficient as 0.85.
2. The blade tips of a reaction turbine are inclined at 30° and 22° in the direction of motion. The guide vanes are of the same profile as that of the moving blades, but in the reversed direction. The condition of steam at a particular stage where the diameter of the drum is 1.2 m and height of the blade is 12 cm is 2 bar pressure and 0.9 dryness. If the turbine is running at 2200 rpm, determine i. the mass flow of steam ii. The power developed. Neglect the shock due to the flow of steam through the blades.
3. The data relevant to an impulse turbine are, velocity of steam from the nozzle is 450 m/s, nozzle angle 22° , angle of moving blade exit 26° , mean blade speed 175 m/s. Neglect friction. Calculate, i. angle of moving blade inlet, ii. Velocity of steam leaving, iii. Work developed per kg of steam, iv. Axial thrust and v. diagram or blade efficiency.

UNIT-IV AIR COMPRESSOR

Syllabus:

Classification and working principle of various types of compressors, work of compression with and without clearance, Volumetric efficiency, Isothermal efficiency and Isentropic efficiency of reciprocating compressors, Multistage air compressor and inter cooling –work of multistage air compressor.

Classification of compressors:

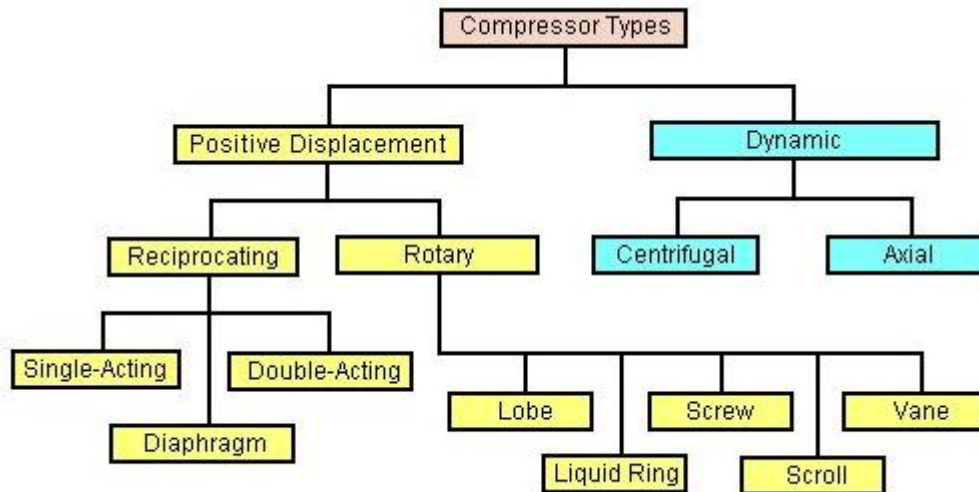

The compressors are also classified based on other aspects like


1. Number of stages (single-stage, 2-stage and multi-stage),
2. Cooling method and medium (Air cooled, water cooled and oil-cooled),
3. Drive types (Engine driven, Motor driven, Turbine driven, Belt, chain, gear or direct coupling drives),
4. Lubrication method (Splash lubricated or forced lubrication or oil-free compressors).
5. Service Pressure (Low, Medium, High)

Positive Displacement compressors:

Reciprocating Compressor:


Single-Acting Reciprocating compressor:

These are usually reciprocating compressors, which has piston working on air only in one direction. The other end of the piston is often free or open which does not perform any work. The air is compressed only on the top part of the piston. The bottom of the piston is open to crankcase and not utilized for the compression of air.

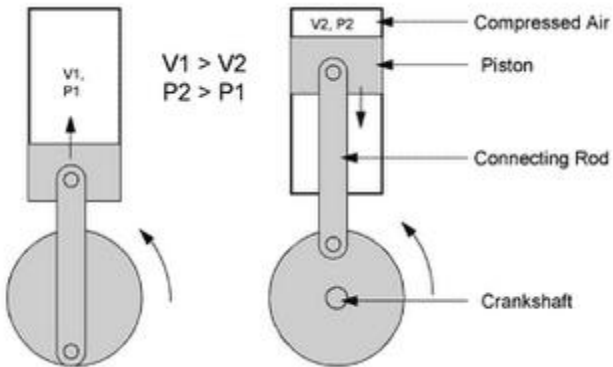


Double acting compressor:

These compressors are having two sets of suction/intake and delivery valves on both sides of the piston. As the piston moves up and down, both sides of the piston is utilized in compressing the air. The intake and delivery valves operate corresponding to the stroke of the compressor. The compressed air delivery is comparatively continuous when compared to a single-acting air compressor. Thus both sides of the pistons are effectively used in compressing the air.

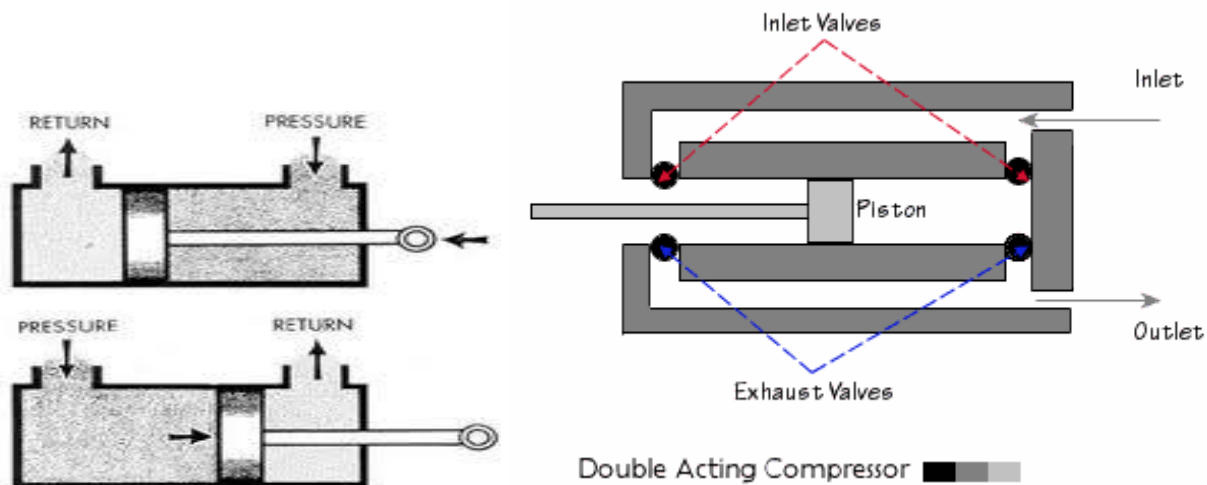

Diaphragm Compressors:


In the diaphragm compressor, the piston pushes against a diaphragm, so the air does not come in contact with the reciprocating parts. This type compressor is preferred for food preparation, pharmaceutical, and chemical industries, because no effluent from the compressor enters the fluid.

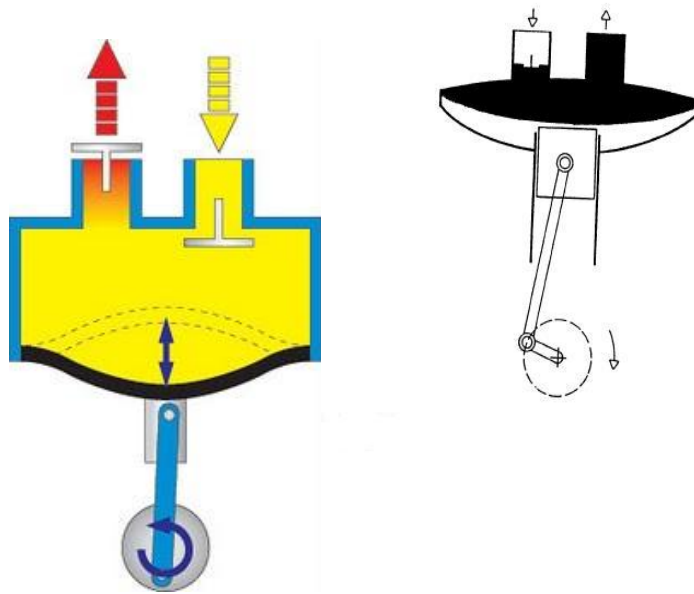

Rotary compressors:

Lobe compressor:


The Lobe type air compressor is very simpler type with no complicated moving parts. There are single or twin lobes attached to the drive shaft driven by the prime mover. The lobes are displaced by 90 degrees. Thus if one of the lobes is in horizontal position, the other at that particular instant will be in vertical position. Thus the air gets trapped in between these lobes and as they rotate they get compressed and delivered to the delivery line.

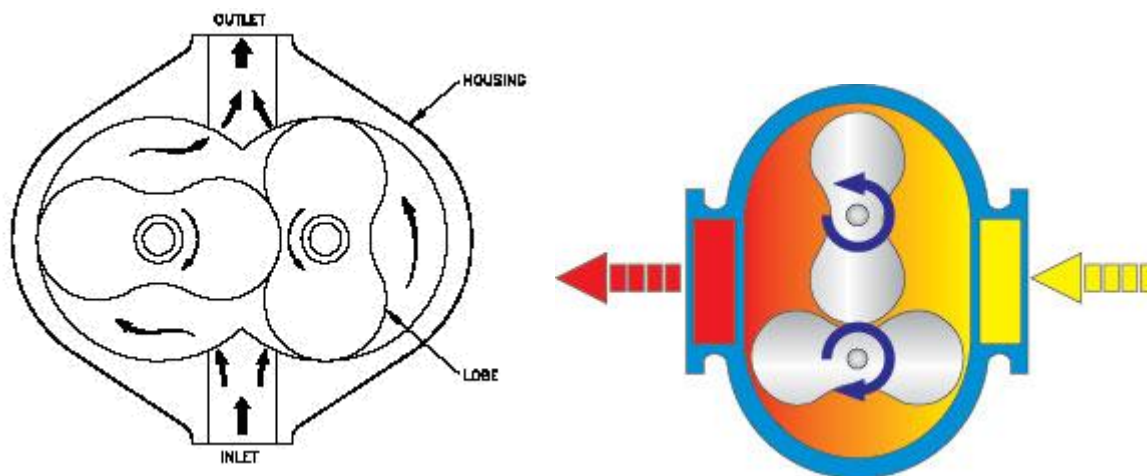

Liquid ring compressor:


Liquid ring compressors require a liquid to create a seal. For medical applications, liquid ring compressors are always sealed with water but not oil. An impeller, which is offset so the impeller is not in the center of the pump housing, rotates and traps pockets of air in the space between the impeller fins and the compressor housing. The impeller is typically made of brass. As the impeller turns, there is a pocket of air that is trapped in the space between each of the fins. The trapped air is compressed between the impeller and the pump housing, sealed with the water ring. As the air is compressed, it's then pushed out of the pumps discharge. To avoid possible contaminants the compressor is always getting a supply of fresh sealing water.

In a “once through” system, sealing water is drained and used only once, while in a “partial re-circulating” system, some (but never all) of the discharged water is re-circulated.

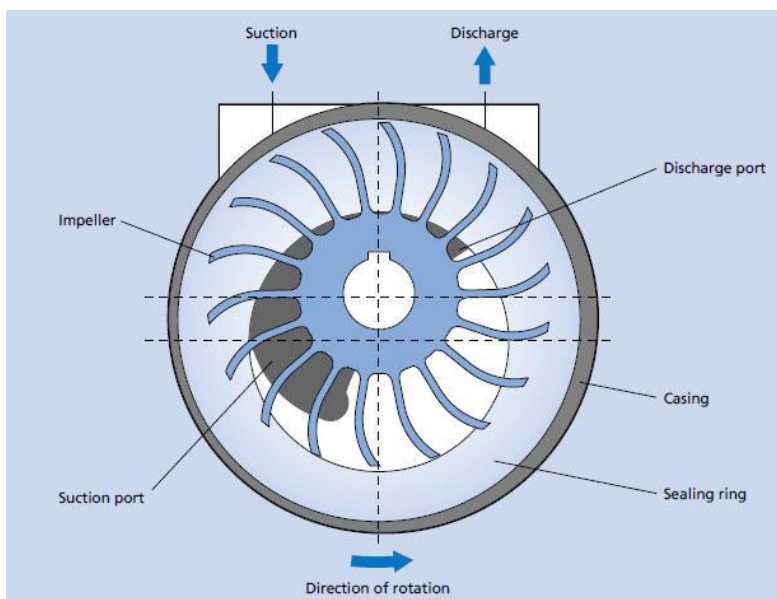**Vane Type compressor:**

The rotary slide vane-type, as illustrated in Figure, has longitudinal vanes, sliding radially in a slotted rotor mounted eccentrically in a cylinder. The centrifugal force carries the sliding vanes against the cylindrical case with the vanes forming a number of individual longitudinal cells in the eccentric annulus between the case and rotor. The suction port is located where the longitudinal cells are largest. The size of each cell is reduced by the eccentricity of the rotor as the vanes approach the discharge port, thus compressing the air.

This type of compressor, looks and functions like a vane type hydraulic pump. An eccentrically mounted rotor turns in a cylindrical housing having an inlet and outlet. Vanes slide back and forth in grooves in the rotor. Air pressure or spring force keeps the tip of these vanes in contact with the housing. Air is trapped in the compartments formed by the vanes and housing and is compressed as the rotor turns.

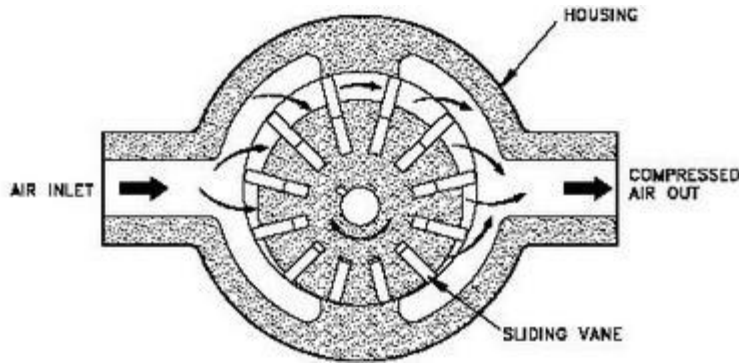



Screw Type compressor:

The screw compressors are efficient in low air pressure requirements. Two screws rotate intermeshing with each other, thus trapping air between the screws and the compressor casing, forming pockets which progressively travel and gets squeezed and delivering it at a higher pressure which opens the delivery valve. The compressed air delivery is continuous and quiet in operation than a reciprocating compressor.

Rotary air compressors are positive displacement compressors. The most common rotary air compressor is the single stage helical or spiral lobe oil flooded screw air compressor. These compressors consist of two rotors within a casing where the rotors compress the air internally. There are no valves. These units are basically oil cooled (with air cooled or water cooled oil coolers) where the oil seals the internal clearances.

Since the cooling takes place right inside the compressor, the working parts never experience extreme operating temperatures. The rotary compressor, therefore, is a continuous duty, air cooled or water cooled compressor package.

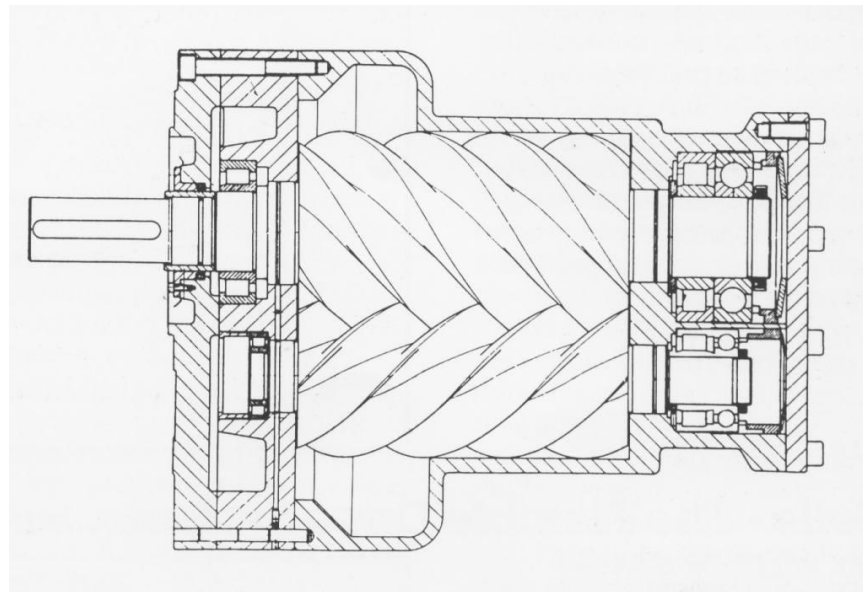


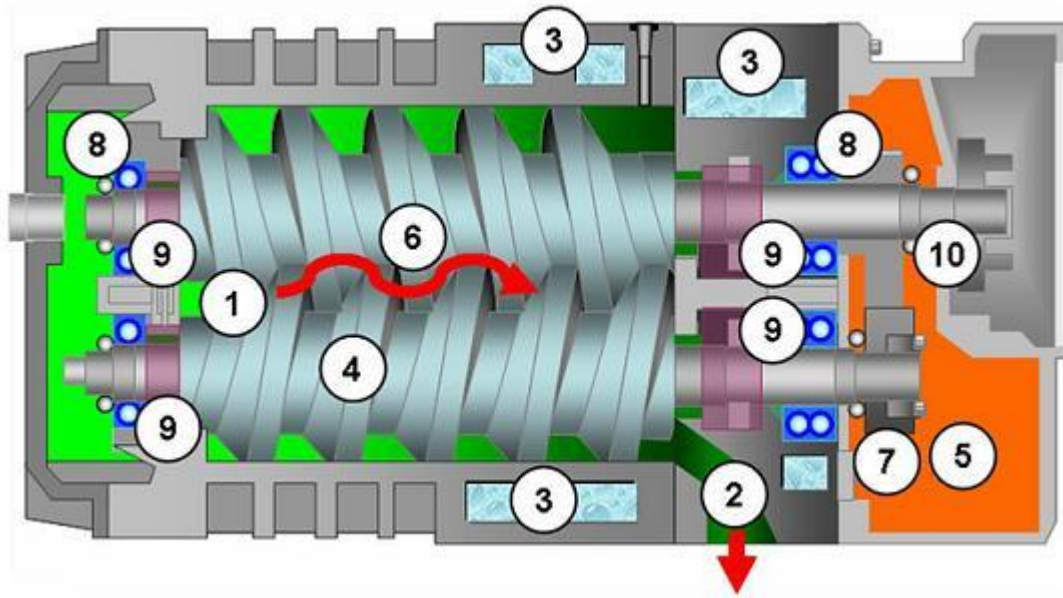


1	Inlet	6	Gas Path
2	Exhaust	7	Timing Gears
3	Water Jacket	8	Bearings
4	Screw	9	Shaft Seal
5	Oil	10	Oil Seal

Scroll Type Compressor:

This type of compressor has a very unique design. There are two scrolls that look like loosely rolled up pieces of paper—one rolled inside the other. The orbiting scroll rotates inside of the stationary scroll. The air is forced into progressively smaller chambers towards the center. The compressed air is then discharged through the center of the fixed scroll. No inlet or exhaust valves are needed.

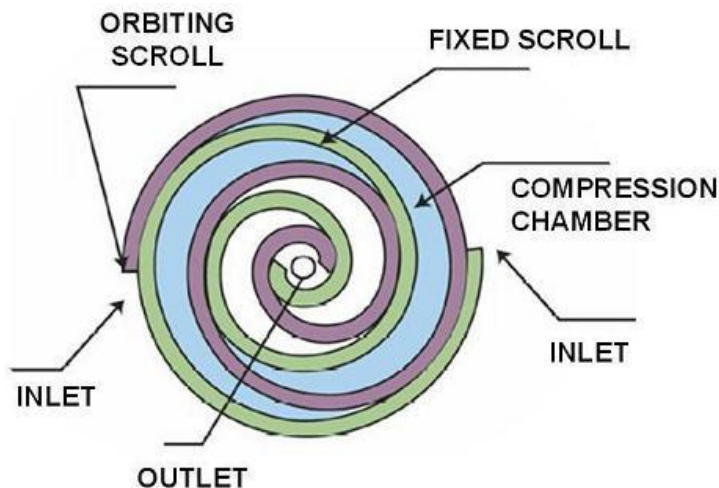

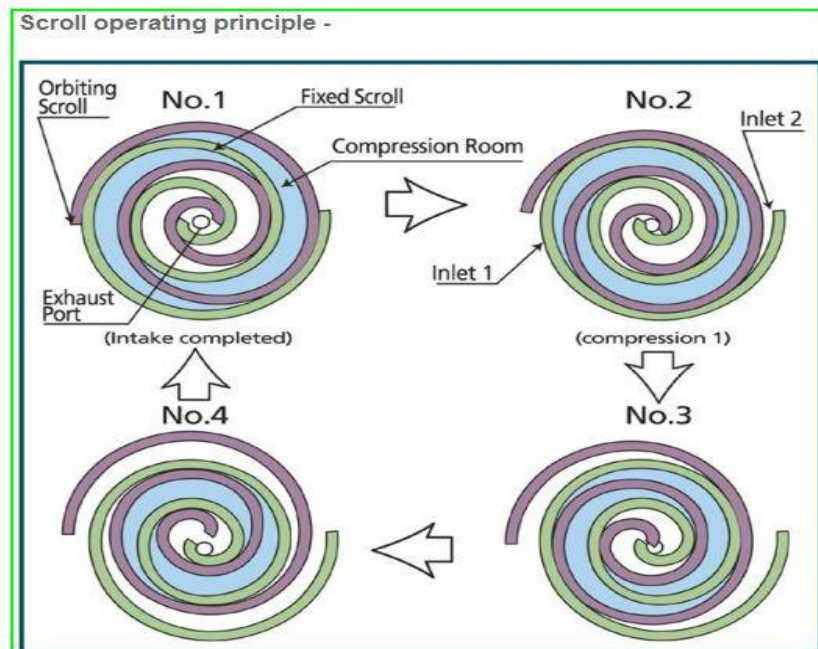

Non-Positive displacement compressors or Dynamic compressor:

Centrifugal Compressor:


The centrifugal air compressor is a **dynamic** compressor which depends on transfer of energy from a **rotating impeller** to the air.

Centrifugal compressors produce high-pressure discharge by converting angular momentum imparted by the rotating impeller (dynamic displacement). In order to do this efficiently, centrifugal compressors rotate at higher speeds than the other types of compressors. These types of compressors are also designed for higher capacity because flow through the compressor is continuous.

Adjusting the inlet guide vanes is the most common method to control capacity of a centrifugal compressor. By closing the guide vanes, volumetric flows and capacity are reduced.


The centrifugal air compressor is an oil free compressor by design. The oil lubricated running gear is separated from the air by shaft seals and atmospheric vents.

The centrifugal air compressor is a dynamic compressor which depends on a rotating impeller to compress the air. In order to do this efficiently, centrifugal compressors must rotate at higher speeds than the other types of compressors. These types of compressors are designed for higher capacity because flow through the compressor is continuous and oil free by design.

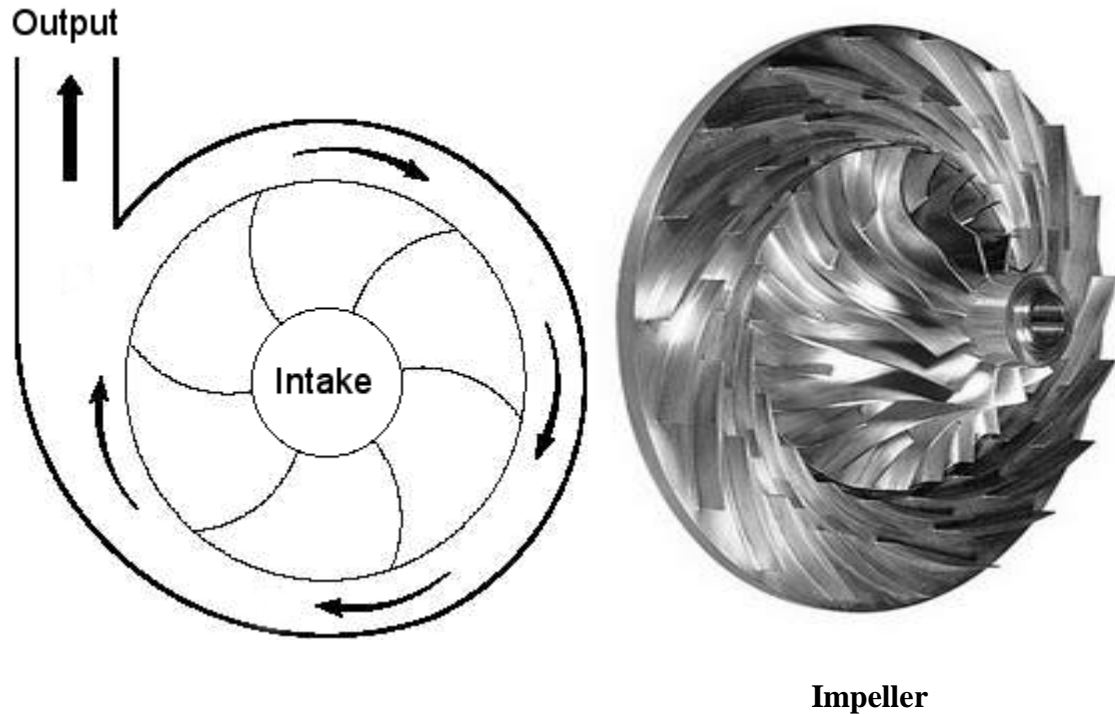



Axial Compressor:

These are similar to centrifugal compressors except the direction of air flow is axial. The blades of the compressor are mounted onto the hub and in turn onto the shaft. As the shaft rotates at a high speed, the ambient air is sucked into the compressor and then gets compressed (high speed of rotation of the blades impart energy to the air) and directed axially for further usage. An axial flow compressor, in its very simple form is called as axial flow fan, which is commonly used for domestic purposes. The pressure built depends on the number of stages. These are commonly used as vent fans in enclosed spaces, blower ducts, etc. One can find its main application in the aerospace industry, where the gas turbines drive the axial flow air compressors.

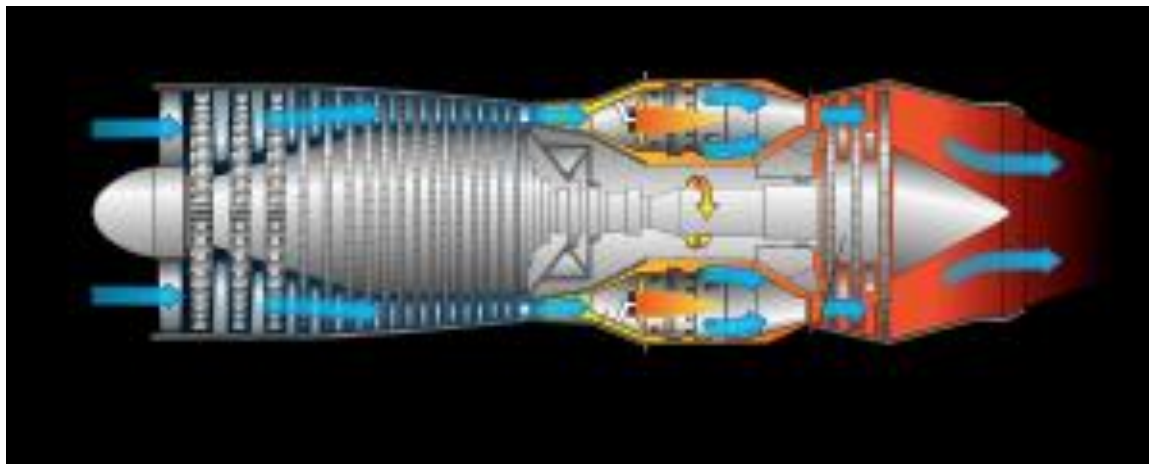


Roots Blower Compressor:

This type is generally called as blower. The discharge air pressure obtained from this type of machine is very low. The Discharge Pressure of 1 bar can be obtained in Single Stage and pressure of 2.2 bar is obtained from Stage. The discharge pressure achieved by two rotors which have separate parallel axis and rotate in opposite directions. This is the example of Positive Displacement Compressor in Rotary Type Air Compressor.

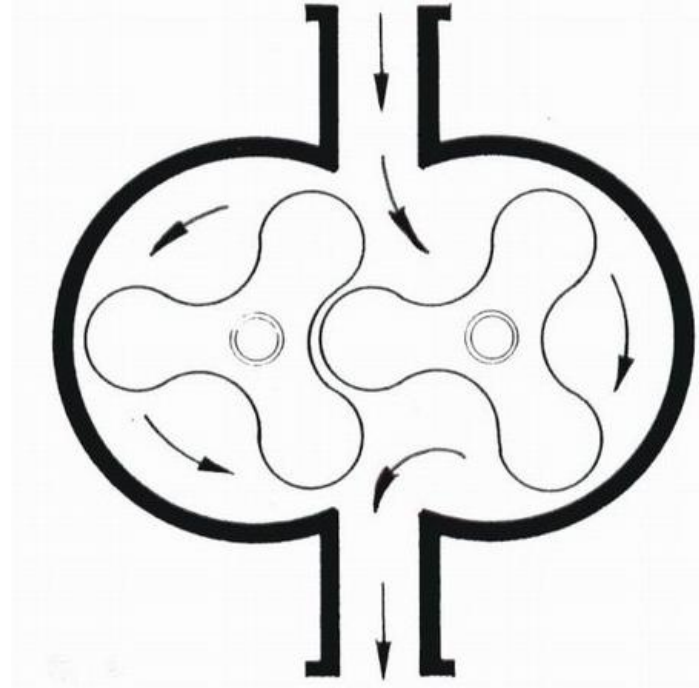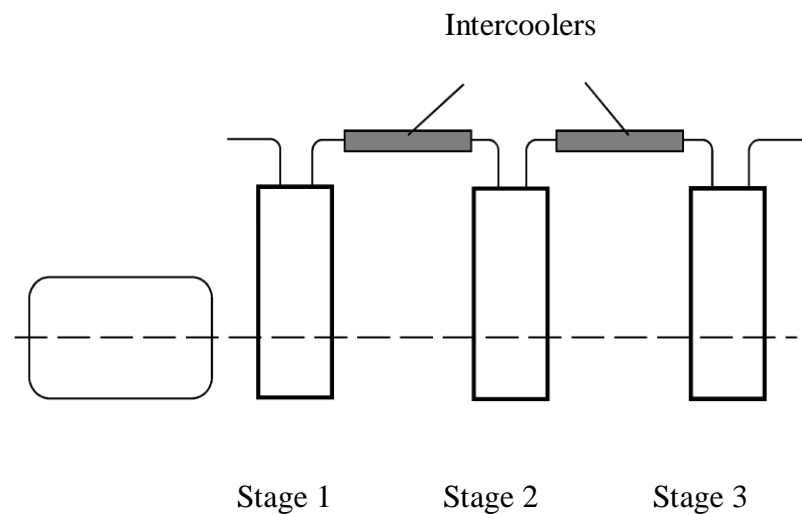**Multistage Compression:**


Multistage compression refers to the compression process completed in more than one stage i.e., a part of compression occurs in one cylinder and subsequently compressed air is sent to subsequent cylinders for further compression. In case it is desired to increase the compression ratio of compressor then multi-stage compression becomes inevitable. If we look at the expression for volumetric efficiency then it shows that the volumetric efficiency decreases with increase in pressure ratio. This aspect can also be explained using p-V representation shown in Figure.

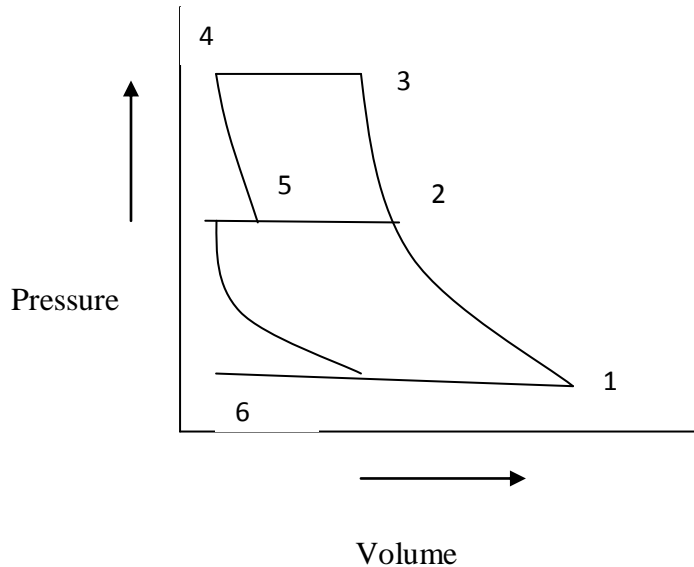

A multi-stage compressor is one in which there are several cylinders of different diameters. The intake of air in the first stage gets compressed and then it is passed over a cooler to achieve a temperature very close to ambient air. This cooled air is passed to the intermediate stage where it is again getting compressed and heated. This air is again passed over a cooler to achieve a temperature as close to ambient as possible. Then this compressed air is passed to the final or the third stage of the air compressor where it is compressed to the required pressure and delivered to the air receiver after cooling sufficiently in an after-cooler.

Advantages of Multi-stage compression:

1. The work done in compressing the air is reduced, thus power can be saved
2. Prevents mechanical problems as the air temperature is controlled
3. The suction and delivery valves remain in cleaner condition as the temperature and vaporization of lubricating oil is less
4. The machine is smaller and better balanced
5. Effects from moisture can be handled better, by draining at each stage
6. Compression approaches near isothermal
7. Compression ratio at each stage is lower when compared to a single-stage machine
8. Light moving parts usually made of aluminum, thus less cost and better maintenance

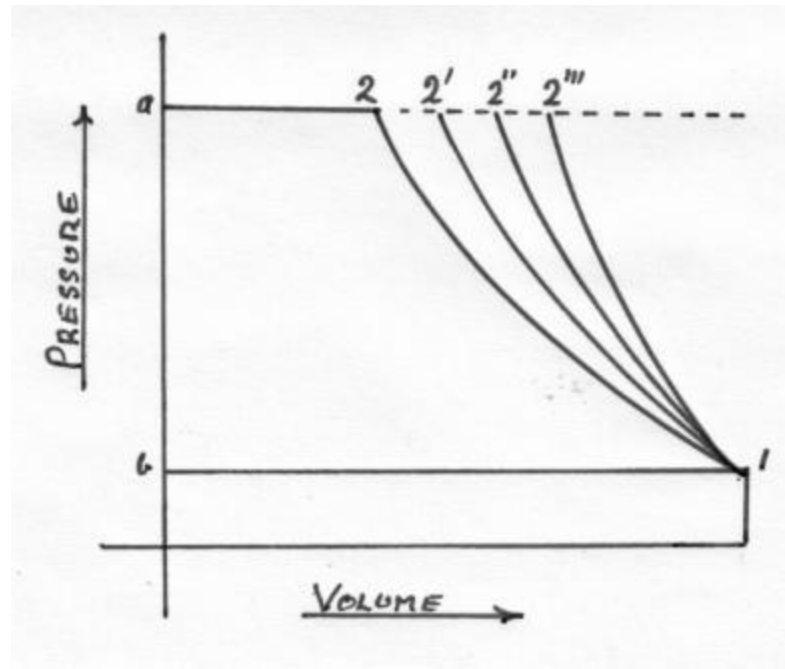Work done in a single stage reciprocating compressor without clearance volume:

Air enters compressor at pressure p_1 and is compressed upto p_2 . Compression work requirement can be estimated from the area below the each compression process. Area on p-V diagram shows that work requirement shall be minimum with isothermal process 1-2''. Work requirement is maximum with process 1-2 ie., adiabatic process. As a designer one shall be interested in a compressor having minimum compression work requirement. Therefore, ideally compression should occur isothermally for minimum work input. In practice it is not possible to have isothermal compression because constancy of temperature during compression can not be realized. Generally, compressors run at substantially high speed while isothermal compression requires compressor to run at very slow speed so that heat evolved during compression is dissipated out and temperature remains constant. Actually due to high speed running of compressor the compression process may be assumed to be near adiabatic or polytropic process following law of compression as $Pv^n = C$ with of 'n' varying between 1.25 to 1.35 for air. Compression process following three processes is also shown on T-s diagram in Fig.16.4. it is thus obvious that actual compression process should be compared with isothermal compression process. A mathematical parameter called isothermal efficiency is defined for quantifying the degree of deviation of actual compression process from ideal compression process. Isothermal efficiency is defined by the ratio is isothermal work and actual indicated work in reciprocating compressor.

$$\text{Isothermal efficiency} = \frac{\text{Isothermal work}}{\text{Actual indicated Work}}$$

Practically, compression process is attempted to be closed to isothermal process by air/water cooling, spraying cold water during compression process. In case of multistage compression process the compression in different stages is accompanied by intercooling in between the stages. $P_2 V_2$.

Mathematically, for the compression work following polytropic process, $PV^n=C$. Assuming negligible clearance volume the cycle work done.

$W_c = \text{Area on p-V diagram}$

$$\begin{aligned} W_c &= \left[p_2 V_2 + \left(\frac{p_2 V_2 - p_1 V_1}{n-1} \right) \right] - p_1 V_1 \\ &= \left[\left(\frac{n}{n-1} \right) [p_2 V_2 - p_1 V_1] \right] \\ &= \left(\frac{n}{n-1} \right) (p_1 V_1) \left[\frac{p_2 V_2}{p_1 V_1} - 1 \right] \\ &= \left(\frac{n}{n-1} \right) (p_1 V_1) \left[\left(\frac{p_2}{p_1} \right)^{\left(\frac{n-1}{n} \right)} - 1 \right] \\ &= \left(\frac{n}{n-1} \right) (mRT_1) \left[\left(\frac{p_2}{p_1} \right)^{\left(\frac{n-1}{n} \right)} - 1 \right] \\ &= \left(\frac{n}{n-1} \right) (mR)(T_2 - T_1) \end{aligned}$$

In case of compressor having isothermal compression process, $n = 1$, ie., $p_1 V_1 = p_2 V_2$

$$W_{iso} = p_2 V_2 + p_1 V_1 \ln r - p_1 V_1$$

$$W_{iso} = p_1 V_1 \ln r, \quad \text{where, } r = \frac{V_1}{V_2}$$

In case of compressor having adiabatic compression process,

$$W_{adiabatic} = \left(\frac{\gamma}{\gamma - 1} \right) (mR)(T_2 - T_1) \quad (\text{Or})$$

$$W_{adiabatic} = (mC_p)(T_2 - T_1)$$

$$W_{adiabatic} = (m)(h_2 - h_1)$$



$$\eta_{iso} = \frac{p_1 V_1 \ln r}{\left(\frac{n}{n-1} \right) (p_1 V_1) \left[\left(\frac{p_2}{p_1} \right)^{\frac{n-1}{n}} - 1 \right]}$$

The isothermal efficiency of a compressor should be close to 100% which means that actual compression should occur following a process close to isothermal process. For this the mechanism be derived to maintain constant temperature during compression process. Different arrangements which can be used are:

- (i) Faster heat dissipation from inside of compressor to outside by use of fins over cylinder. Fins facilitate quick heat transfer from air being compressed to atmosphere so that temperature rise during compression can be minimized.
- (ii) Water jacket may be provided around compressor cylinder so that heat can be picked by cooling water circulating through water jacket. Cooling water circulation around compressor regulates rise in temperature to great extent.
- (iii) The water may also be injected at the end of compression process in order to cool the air being compressed. This water injection near the end of compression process requires special arrangement in compressor and also the air gets mixed with water and needs to be separated out before being used. Water injection also contaminates the lubricant film inner surface of cylinder and may initiate corrosion etc, The water injection is not popularly used.
- (iv) In case of multistage compression in different compressors operating serially, the air leaving one compressor may be cooled upto ambient state or somewhat high temperature before being injected into subsequent compressor. This cooling of fluid being compressed between two consecutive compressors is called intercooling and is frequently used in case of multistage compressors.

Work done in a single stage reciprocating compressor with clearance volume:

Considering clearance volume: With clearance volume the cycle is represented on Figure. The work done for compression of air polytropically can be given by the area enclosed in cycle 1-2-3-4. Clearance volume in compressors varies from 1.5% to 35% depending upon type of compressor.

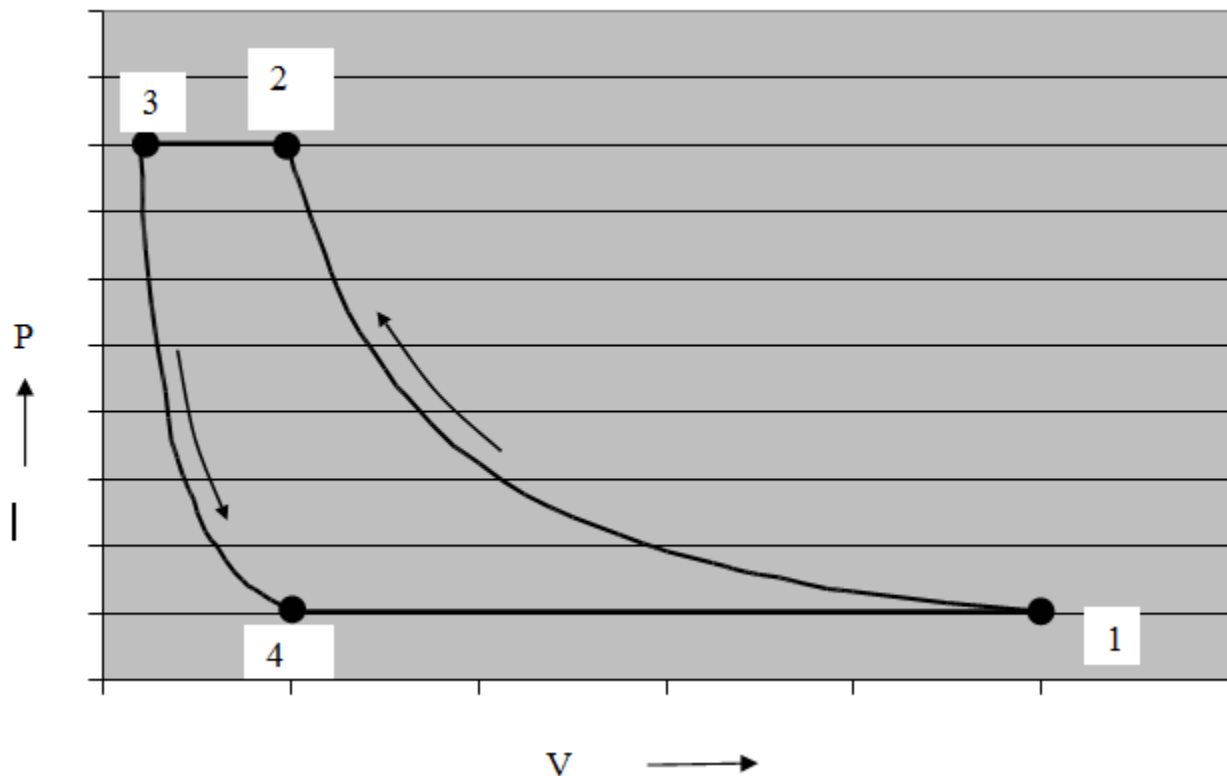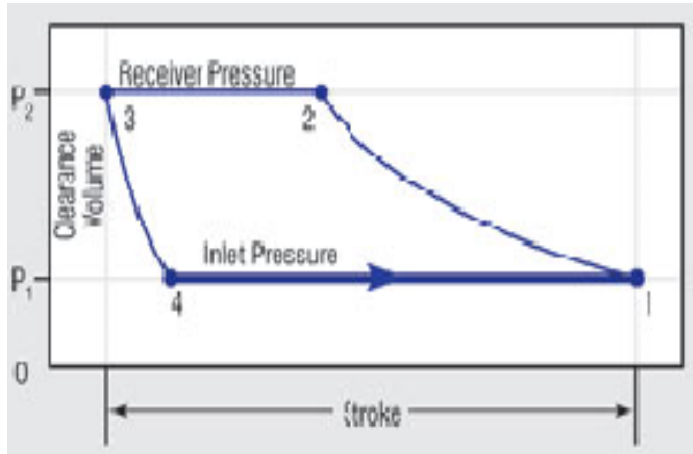

$$W_{c, \text{with CV}} = \text{Area } 1234$$

$$= \left(\frac{n}{n-1} \right) (p_1 V_1) \left[\left(\frac{p_2}{p_1} \right)^{\frac{n-1}{n}} - 1 \right] - \left(\frac{n}{n-1} \right) (p_4 V_4) \left[\left(\frac{p_3}{p_4} \right)^{\frac{n-1}{n}} - 1 \right]$$

$$\text{Here } P_1 = P_4, P_2 = P_3$$

$$= \left(\frac{n}{n-1} \right) (p_1 V_1) \left[\left(\frac{p_2}{p_1} \right)^{\frac{n-1}{n}} - 1 \right] - \left(\frac{n}{n-1} \right) (p_1 V_4) \left[\left(\frac{p_2}{p_1} \right)^{\frac{n-1}{n}} - 1 \right]$$

$$= \left(\frac{n}{n-1} \right) (p_1) \left[\left(\frac{p_2}{p_1} \right)^{\frac{n-1}{n}} - 1 \right] (V_1 - V_4)$$

In the cylinder of reciprocating compressor ($V_1 - V_4$) shall be the actual volume of air delivered per cycle. $V_d = V_1 - V_4$. This ($V_1 - V_4$) is actually the volume of air inhaled in the cycle and delivered subsequently.

$$W_{c, \text{with CV}} = \left(\frac{n}{n-1} \right) (p_1 V_d) \left[\left(\frac{p_2}{p_1} \right)^{\frac{n-1}{n}} - 1 \right]$$

If air is considered to behave as perfect gas then pressure, temperature, volume and mass can be inter related using perfect gas equation. The mass at state 1 may be given as m_1 mass at state 2 shall be m_1 , but at state 3 after delivery mass reduces to m_2 and at state 4 it shall be m_2 .

$$\text{So, at state 1, } p_1 V_1 = m_1 R T_1$$

$$\text{at state 2, } p_2 V_2 = m_1 R T_2$$

$$\text{at state 3, } p_3 V_3 = m_2 R T_3 \text{ or } p_2 V_3 = m_2 R T_3$$

$$\text{at state 4, } p_4 V_4 = m_2 R T_4 \text{ or } p_1 V_4 = m_2 R T_4$$

Ideally there shall be no change in temperature during suction and delivery

i.e., $T_4 = T_1$ and $T_2 = T_3$ from earlier equation

$$W_{c,withCV} = \left(\frac{n}{n-1}\right)(p_1) \left[\left(\frac{p_2}{p_1}\right)^{\left(\frac{n-1}{n}\right)} - 1 \right] (V_1 - V_4)$$

Temperature and pressure can be related as,

$$\left(\frac{p_2}{p_1}\right)^{\frac{(n-1)}{n}} = \frac{T_2}{T_1} \quad \text{and} \quad \left(\frac{p_4}{p_3}\right)^{\frac{(n-1)}{n}} = \frac{T_4}{T_3} \quad \Rightarrow \quad \left(\frac{p_1}{p_2}\right)^{\frac{(n-1)}{n}} = \frac{T_4}{T_3}$$

Substituting

$$W_{c,withCV} = \left(\frac{n}{n-1}\right)(m_1RT_1 - m_2RT_4) \left[\frac{T_2}{T_1} - 1 \right]$$

Substituting for constancy of temperature during suction and delivery.

$$W_{c,withCV} = \left(\frac{n}{n-1}\right)(m_1RT_1 - m_2RT_1) \left[\frac{T_2 - T_1}{T_1} \right]$$

Or

$$W_{c,withCV} = \left(\frac{n}{n-1}\right)(m_1 - m_2)R(T_2 - T_1)$$

Thus $(m_1 - m_2)$ denotes the mass of air sucked or delivered. For unit mass of air delivered the work done per kg of air can be given as,

$$W_{c,withCV} = \left(\frac{n}{n-1}\right)R(T_2 - T_1) \quad \text{per kg of air}$$

Thus from above expressions it is obvious that the clearance volume reduces the effective swept volume i.e., the mass of air handled but the work done per kg of air delivered remains unaffected.

From the cycle work estimated as above the theoretical power required for running compressor shall be,

For single acting compressor running with N rpm, power input required, assuming clearance volume.

$$Power_{required} = \left[\left(\frac{n}{n-1} \right) \left[\left(\frac{p_2}{p_1} \right)^{\left(\frac{n-1}{n} \right)} - 1 \right] p_1 (V_1 - V_4) \right] (N)$$

For double acting compressor, Power

$$Power_{required} = \left[\left(\frac{n}{n-1} \right) \left[\left(\frac{p_2}{p_1} \right)^{\left(\frac{n-1}{n} \right)} - 1 \right] p_1 (V_1 - V_4) \right] (2N)$$

Volumetric Efficiency:

Volumetric efficiency of compressor is the measure of the deviation from volume handling capacity of compressor. Mathematically, the volumetric efficiency is given by the ratio of actual volume of air sucked and swept volume of cylinder. Ideally the volume of air sucked should be equal to the swept volume of cylinder, but it is not so in actual case. Practically the volumetric efficiency lies between 60 to 90%.

Volumetric efficiency can be overall volumetric efficiency and absolute volumetric efficiency as given below.

$$\text{Overall volumetric efficiency} = \frac{\text{Volume of free air sucked in cylinder}}{\text{Swept volume of LP cylinder}}$$

$$(\text{Volumetric efficiency})_{\text{freeaircondition}} = \frac{\text{Volume of free air sucked in cylinder}}{(\text{Swept volume of LP cylinder})_{\text{freeaircondition}}}$$

Here free air condition refers to the standard conditions. Free air condition may be taken as 1 atm or 1.01325 bar and 15°C or 288K. consideration for free air is necessary as otherwise the different compressors can not be compared using volumetric efficiency because specific volume or density of air varies with altitude. It may be seen that a compressor at datum level (sea level) shall deliver large mass than the same compressor at high altitude.

This concept is used for giving the capacity of compressor in terms of ‘free air delivery’ (FAD). “Free air delivery is the volume of air delivered being reduced to free air conditions”. In case of air the free air delivery can be obtained using perfect gas equation as,

$$\frac{p_a V_a}{T_a} = \frac{p_1 (V_1 - V_4)}{T_1} = \frac{p_2 (V_2 - V_3)}{T_2}$$

Where subscript a or p_a , V_a , T_a denote properties at free air conditions

$$V_a = \frac{p_1 T_a}{p_a} \frac{p_1 (V_1 - V_4)}{T_1} = \text{FAD per cycle}$$

This volume V_a gives ‘free air delivered’ per cycle by the compressor.

Absolute volumetric efficiency can be defined, using NTP conditions in place of free air conditions.

$$\eta_{vol} = \frac{FAD}{\text{Swept volume}} = \frac{V_a}{(V_1 - V_2)} = \frac{p_1 T_a (V_1 - V_4)}{p_a T_1 (V_1 - V_3)}$$

$$\eta_{vol} = \left(\frac{p_1 T_a}{p_a T_1} \right) \left\{ \frac{(V_s + V_c) - V_4}{V_s} \right\}$$

Here V_s is the swept volume = $V_1 - V_3$ and V_c is the clearance volume = V_3

$$\eta_{vol} = \left(\frac{p_1 T_a}{p_a T_1} \right) \left\{ 1 + \left(\frac{V_c}{V_s} \right) - \left(\frac{V_4}{V_s} \right) \right\}$$

$$\text{Here } \frac{V_4}{V_s} = \frac{V_4}{V_c} \cdot \frac{V_c}{V_s} = \left(\frac{V_4}{V_3} \cdot \frac{V_c}{V_s} \right)$$

Let the ratio of clearance volume to swept volume be given by $C = \frac{V_c}{V_s}$

$$\eta_{vol} = \left(\frac{p_1 T_a}{p_a T_1} \right) \left\{ 1 + C - C \left(\frac{V_4}{V_3} \right) \right\}$$

$$\eta_{vol} = \left(\frac{p_1 T_a}{p_a T_1} \right) \left\{ 1 + C - C \left(\frac{p_2}{p_1} \right)^{1/n} \right\}$$

Volumetric efficiency depends on ambient pressure and temperature, suction pressure and temperature, ratio of clearance to swept volume, and pressure limits. Volumetric efficiency increases with decrease in pressure ratio in compressor.

Mathematical analysis of multistage compressor is done with following assumptions:

- (i) Compression in all the stages is done following same index of compression and there is no pressure drop in suction and delivery pressures in each stage. Suction and delivery pressure remains constant in the stages.
- (ii) There is perfect intercooling between compression stages.
- (iii) Mass handled in different stages is same i.e, mass of air in LP and HP stages are same.
- (iv) Air behaves as perfect gas during compression.

From combined p-V diagram the compressor work requirement can be given as,

$$\text{Work requirement in LP cylinder, } W_{LP} = \left(\frac{n}{n-1} \right) P_1 V_1 \left\{ \left(\frac{P_2}{P_1} \right)^{\frac{(n-1)}{n}} - 1 \right\}$$

$$\text{Work requirement in HP cylinder, } W_{HP} = \left(\frac{n}{n-1} \right) P_2 V_2 \left\{ \left(\frac{P_2}{P_1} \right)^{\frac{(n-1)}{n}} - 1 \right\}$$

For perfect intercooling, $p_1 V_1 = p_2 V_2$, and

$$W_{HP} = \left(\frac{n}{n-1} \right) P_2 V_2' \left\{ \left(\frac{P_2}{P_1} \right)^{\frac{(n-1)}{n}} - 1 \right\}$$

Therefore, total work requirement, $W_c = W_{LP} + W_{HP}$, for perfect inter cooling

$$W_c = \left(\frac{n}{n-1} \right) \left[P_1 V_1 \left\{ \left(\frac{P_2}{P_1} \right)^{\frac{(n-1)}{n}} - 1 \right\} + P_2 V_2' \left\{ \left(\frac{P_2}{P_1} \right)^{\frac{(n-1)}{n}} - 1 \right\} \right]$$

$$= \left(\frac{n}{n-1} \right) \left[P_1 V_1 \left\{ \left(\frac{P_2}{P_1} \right)^{\frac{n-1}{n}} - 1 \right\} + P_1 V_1 \left\{ \left(\frac{P_2'}{P_2} \right)^{\frac{n-1}{n}} - 1 \right\} \right]$$

$$W_C = \left(\frac{n}{n-1} \right) P_1 V_1 \left[\left(\frac{P_2}{P_1} \right)^{\frac{n-1}{n}} + \left(\frac{P_2'}{P_1} \right)^{\frac{n-1}{n}} - 2 \right]$$

Minimum work required in two stage compressor:

Minimum work required in two stage compressor can be given by

$$W_{C,\min} = \left(\frac{n}{n-1} \right) P_1 V_1 \cdot 2 \left\{ \left(\frac{P_2}{P_1} \right)^{\frac{n-1}{n}} - 1 \right\}$$

For I number of stages, minimum work,

$$W_{C,\min} = i \cdot \left(\frac{n}{n-1} \right) P_1 V_1 \left\{ \left(\frac{P_{i+1}}{P_i} \right)^{\frac{n-1}{ni}} - 1 \right\}$$

It also shows that for optimum pressure ratio the work required in different stages remains same for the assumptions made for present analysis. Due to pressure ration being equal in all stages the temperature ratios and maximum temperature in each stage remains same for perfect intercooling.

If the actual volume sucked during suction stroke is V_1, V_2, V_3, \dots for different stages they by perfect gas law, $P_1 V_1 = RT_1, P_2 V_2 = RT_2, P_3 V_3 = RT_3$

For perfect intercooling

$$P_1 V_1 = RT_1, P_2 V_2 = RT_1, P_3 V_3 = RT_1$$

$$P_1 V_1 = P_2 V_2 = RT_2, P_3 V_3 = \dots$$

If the volumetric efficiency of respective stages in $\eta_{V_1}, \eta_{V_2}, \eta_{V_3}, \dots$

Then theoretical volume of cylinder1, $V_{1,th} = \frac{V_1}{\eta_{V_1}}; V_1 = \eta_{V_1} \cdot V_{1,th}$

Cylinder 2, $V_{2,th} = \frac{V_2}{\eta_{V_2}}; V_2 = \eta_{V_2} \cdot V_{2,th}$

Cylinder 3, $V_{3,th} = \frac{V_3}{\eta_{V_3}}; V_3 = \eta_{V_3} \cdot V_{3,th}$

Substituting,

$$P_1 \cdot \eta_{V_1} \cdot V_{1,th} = P_2 \cdot \eta_{V_2} \cdot V_{2,th} = P_3 \cdot \eta_{V_3} \cdot V_{3,th} = \dots$$

Theoretical volumes of cylinder can be given using geometrical dimensions of cylinder as diameters $D_1, D_2, D_3 \dots$ and stroke lengths $L_1, L_2, L_3 \dots$

Or
$$V_{1,th} = \frac{\pi}{4} \cdot D_1^2 \cdot L_1$$

$$V_{2,th} = \frac{\pi}{4} \cdot D_2^2 \cdot L_2$$

$$V_{3,th} = \frac{\pi}{4} \cdot D_3^2 \cdot L_3$$

Or
$$P_1 \cdot \eta_{V_1} \cdot \frac{\pi}{4} \cdot D_1^2 \cdot L_1 = P_2 \cdot \eta_{V_2} \cdot \frac{\pi}{4} \cdot D_2^2 \cdot L_2$$

$$= P_3 \cdot \eta_{V_3} \cdot \frac{\pi}{4} \cdot D_3^2 \cdot L_3 = \dots$$

$$P_1 \cdot \eta_{V_1} \cdot \frac{\pi}{4} \cdot D_1^2 \cdot L_1 = P_2 \cdot \eta_{V_2} \cdot \frac{\pi}{4} \cdot D_2^2 \cdot L_2$$

$$= P_3 \cdot \eta_{V_3} \cdot \frac{\pi}{4} \cdot D_3^2 \cdot L_3 = \dots$$

If the volumetric efficiency is same for all cylinders, i.e. $\eta_{V_1} = \eta_{V_2} = \eta_{V_3} = \dots$ and stroke for all cylinder is same i.e. $L_1 = L_2 = L_3 = \dots$

Then, $D_1^2 P_1 = D_2^2 P_2 = D_3^2 P_3 = \dots$

These generic relations may be used for getting the ratio of diameters of cylinders of multistage compression.

Energy balance: Energy balance may be applied on the different components constituting multistage compression.

For LP stage the steady flow energy equation can be written as below:

$$m \cdot h_1 + W_{LP} = m \cdot h_2 + Q_{LP}$$

$$Q_{LP} = W_{LP} - m(h_2 - h_1)$$

$$Q_{LP} = W_{LP} - m \cdot C_p (T_2 - T_1)$$

For intercooling (Fig. 5.5) between LP and HP stage steady flow energy equation shall be;

$$m \cdot h_2 = m \cdot h_{2'} + Q_{int}$$

$$Q_{int} = m(h_2 - h_{2'})$$

$$Q_{int} = m \cdot C_p (T_2 - T_{2'})$$

For HP stage (Fig.5.5) the steady flow energy equation yields.

$$m \cdot h_{2'} + W_{HP} = m \cdot h_{3'} + Q_{HP}$$

$$Q_{HP} = W_{HP} + m(h_{2'} - h_{3'})$$

$$Q_{HP} = W_{HP} + m \cdot C_p (T_{2'} - T_{3'}) = W_{HP} - m \cdot C_p (T_{3'} - T_{2'})$$

In case of perfect intercooling and optimum pressure ratio, $T_{2'} = T_1$ and $T_2 = T_{3'}$

Hence for these conditions,

$$Q_{LP} = W_{LP} - m \cdot C_p (T_2 - T_1)$$

$$Q_{int} = m \cdot C_p (T_2 - T_1)$$

$$Q_{HP} = W_{HP} - m \cdot C_p (T_2 - T_1)$$

Total heat rejected during compression shall be the sum of heat rejected during compression and heat extracted in intercooler for perfect intercooling.

$$\text{Heat rejected during compression for polytropic process} = \left(\frac{\gamma - n}{\gamma - 1} \right) \times \text{Work}$$

Sample Problems:

1. A single stage single acting air compressor is used to compress air from 1.013 bar and 25° C to 7 bar according to law $PV^{1.3} = C$. The bore and stroke of a cylinder are 120mm and 150mm respectively. The compressor runs at 250 rpm. If clearance volume of the cylinder is 5% of stroke volume and the mechanical efficiency of the compressor is 85%, determine volumetric efficiency, power, and mass of air delivered per minute.
2. A two stage single acting air compressor compresses 2m³ air from 1 bar and 20° C to 15 bar. The air from the low pressure compressor is cooled to 25° C in the intercooler. Calculate the minimum power required to run the compressor if the compression follows $PV^{1.25} = C$ and the compressor runs at 400 rpm.
3. A single stage single acting air compressor is used to compress air from 1 bar and 22° C to 6 bar according to the law $PV^{1.25} = C$. The compressor runs at 125 rpm and the ratio of stroke length to bore of a cylinder is 1.5. If the power required by the compressor is 20 Kw, determine the size of the cylinder.

UNIT-V


REFRIGERATION AND AIR CONDITIONING

Syllabus:

Vapour compression refrigeration cycle- super heat, sub cooling – Performance calculations - working principle of vapour absorption system, Ammonia –Water, Lithium bromide –water systems (Description only) - Alternate refrigerants – Comparison between vapour compression and absorption systems – Air conditioning system: Types, Working Principles - Psychrometry, Psychrometric chart - Cooling Load calculations - Concept of RSHE, GSHE, ESHE.

Vapour Compression Refrigeration Cycle:

Process 1-2: Isentropic compression of the refrigerant from state 1 to state 2. During this process work is done on the refrigerant by the surroundings. At the end of the process the refrigerant will be in superheated vapour state.

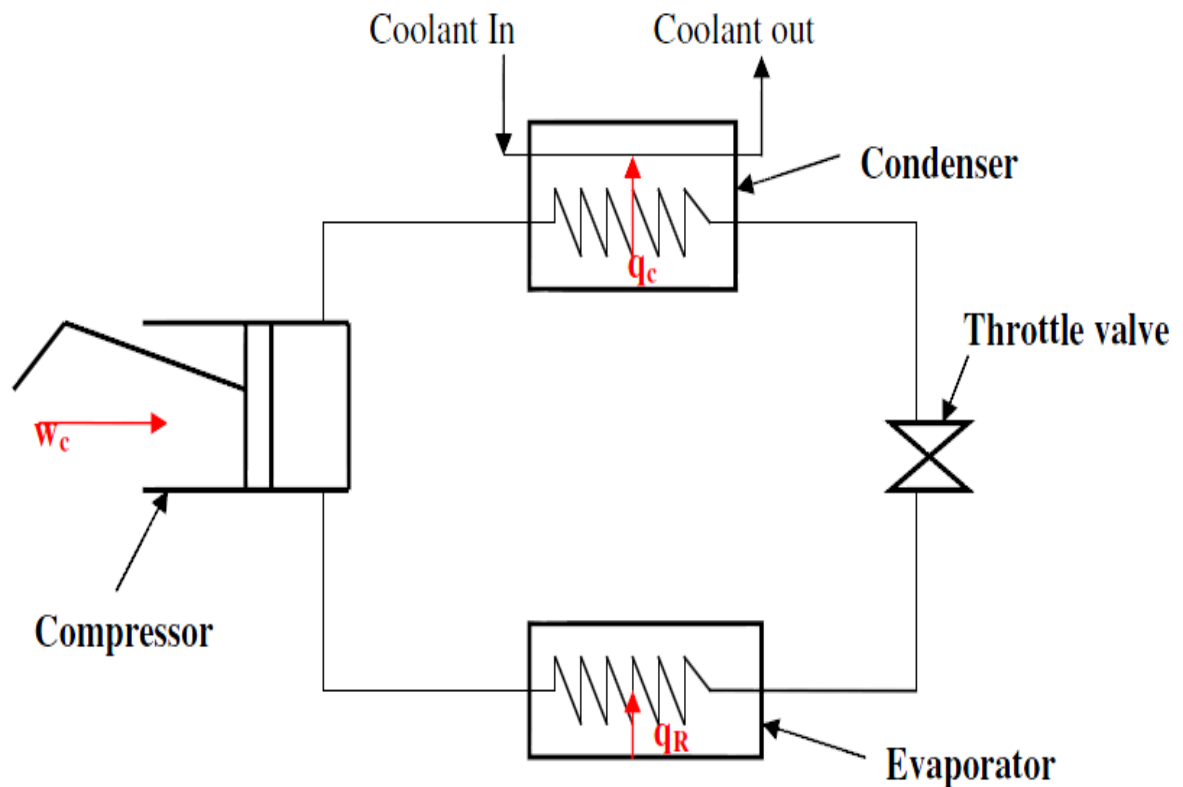

Process 2-3: Constant pressure condensation of the refrigerant in the condenser till it becomes a saturated liquid.

Process 3-4: Throttling expansion of the refrigerant from condenser pressure to the evaporator pressure.

Process 4-1: Constant pressure vapourisation of the refrigerant in the evaporator till it becomes a dry saturated vapour. During this process heat is absorbed by the refrigerant from the place to be refrigerated.

Applying steady flow steady state energy equation to the evaporator and neglecting the changes in kinetic and potential energies we have

$$\text{Refrigeration effect} = Q_R = m (h_1 - h_4)$$


Since process 3-4 is a throttling process, $h_4 = h_3$.

$$\text{Hence } Q_R = m (h_1 - h_3)$$


Similarly, by applying steady flow, steady state energy equation to compressor we get


$$\text{Compressor work input} = W_c = m (h_2 - h_1)$$

$$\text{Hence } \text{COP} = \frac{Q_R}{W_c} = \frac{(h_1 - h_4)}{(h_2 - h_1)}$$

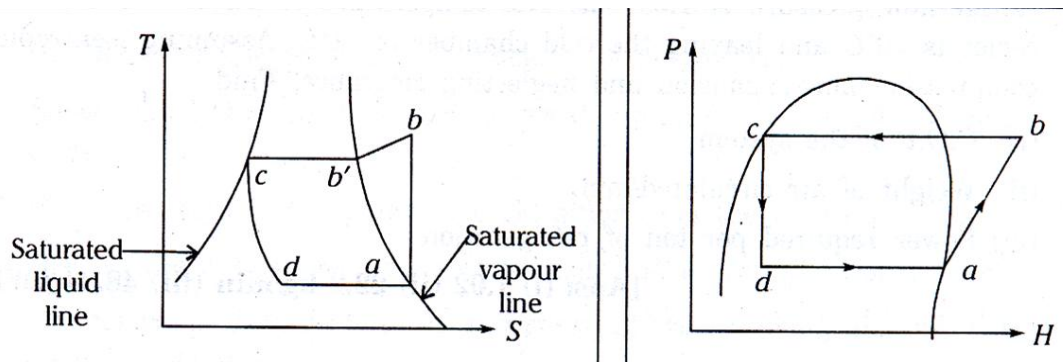

Sub cooling or Under cooling:

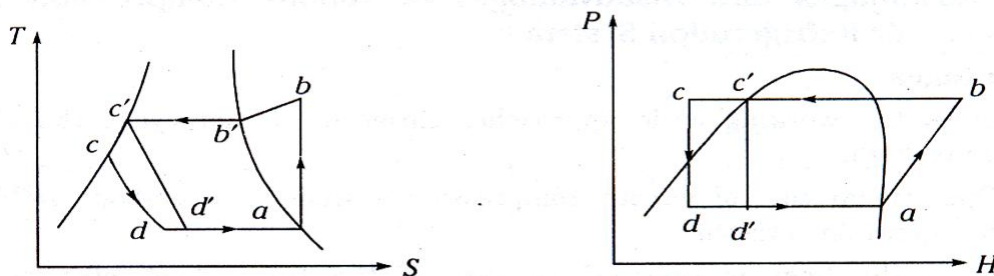

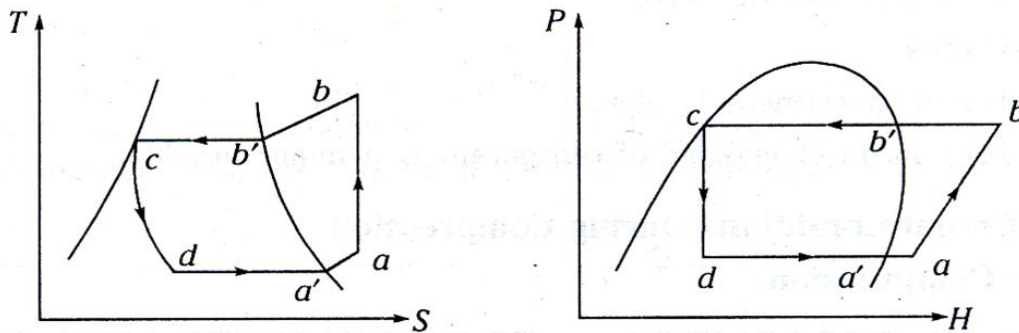Super Heating:**Advantages of Vapour compression refrigeration system over air refrigeration system:**

- Since the working cycle approaches closer to Carnot cycle, the C.O.P is quite high.
- Operational cost of vapour compression system is just above 1/4th of air refrigeration system.
- Since the heat removed consists of the latent heat of vapour, the amount of liquid circulated is less and as a result the size of the evaporator is smaller.
- Any desired temperature of the evaporator can be achieved just by adjusting the throttle valve.

Disadvantages of Vapour compression refrigeration system over air refrigeration system

- Initial investment is high
- Prevention of leakage of refrigerant is a major problem

Refrigerant

A refrigerant is a fluid in a refrigerating system that by its evaporating takes the heat of the cooling coils and gives up heat by condensing the condenser.

Identifying refrigerants by numbers

The present practice in the refrigeration industry is to identify refrigerants by numbers. The identification system of numbering has been standardized by the American society of heating, refrigerating and air conditioning engineers (ASHRAE), some refrigerants in common use are

<u>Refrigeration</u>	<u>Name and Chemical Formula</u>
R-11	Trichloromonofluoromethane CCl_3F
R-12	Dichlorodifluoromethane CCl_2F_2
R-22	Monochlorodifluoromethane CHClF_2
R-717	Ammonia NH_3

R114(R40)	Azeotropic mixture of 73.8%
R-500	(R-22) and 26.2% R-152a
R502	Azeotropic mixture of 48.8%
	(R-22) and 51.2% R-115
R-764	Sulphur Dioxide SO₂

Properties of Refrigerants

- **Toxicity:**
It obviously desirable that the refrigerant have little effect on people
- **Inflammability:**
Although refrigerants are entirely sealed from the atmosphere, leaks are bound to develop. If the refrigerant is inflammable and the system is located where ignition of the refrigerant may occur, a great hazard is involved.
- **Boiling Point.**
An ideal refrigerant must have low boiling temperature at atmospheric pressure
- **Freezing Point**
An ideal refrigerant must have a very low freezing point because the refrigerant should not freeze at low evaporator temperatures.
- **Evaporator and condenser pressure.**
In order to avoid the leakage of the atmosphere air and also to enable the detection of the leakage of the refrigerant, both the Evaporator and condenser pressure should be slightly above the atmosphere pressure.
- **Chemical Stability**
An ideal refrigerant must not decompose under operating conditions..
- **Latent heat of Evaporation.**
The Latent heat of Evaporation must be very high so that a minimum amount of refrigerant will accomplish the desired result; in other words, it increases the refrigeration effect
- **Specific Volume**
The Specific Volume of the refrigerant must be low. The lower specific volume of the refrigerant at the compressor reduces the size of the compressor.

- **Specific heat of liquid vapour.**

A good refrigerant must have low specific heat when it is in liquid state and high specific heat when it is vaporized

- **Viscosity**

The viscosity of the refrigerant in both the liquid and vapour state must be very low as improved the heat transfer and reduces the pumping pressure.

- **Corrosiveness.**

A good refrigerant should be non-corrosive to prevent the corrosion of the metallic parts of the refrigerator.

- **Odour.**

A good refrigerant must be odourless, otherwise some foodstuff such as meat, butter, etc. loses their taste

- **Oil solvent properties.**

A good refrigerant must not react with the lubricating oil used in the refrigerator for lubricating the parts of the compressor.

Ton of refrigeration:

Amount of heat required to Melt a Ton of Ice in a 24/h Period

One ton of refrigeration is the heat required to melt 1 ton of ice in 24 hrs. That is, a refrigeration machine rated at 1 ton cools as much in 24 hrs. as 1 ton of ice would by melting in the same period.

The heat required is the product of the latent heat of fusion and the mass in kg.

$$Q = mH,$$

$$1 \text{ ton} = 907 \text{ kg}$$

$$\text{latent heat of fusion: } H = 340 \text{ kJ/kg}$$


$$Q = 907 \times 340 = 308380 \text{ kJ}$$

The power required is then:

$$P = E/t = Q/t = 308380 \text{ kJ}/24 \text{ hr} = 308380/(24 \times 3600) = 3.57 \text{ kw}$$

Note: 1 watt = 1 J/s

so that 1 kw = 1 kJ/s

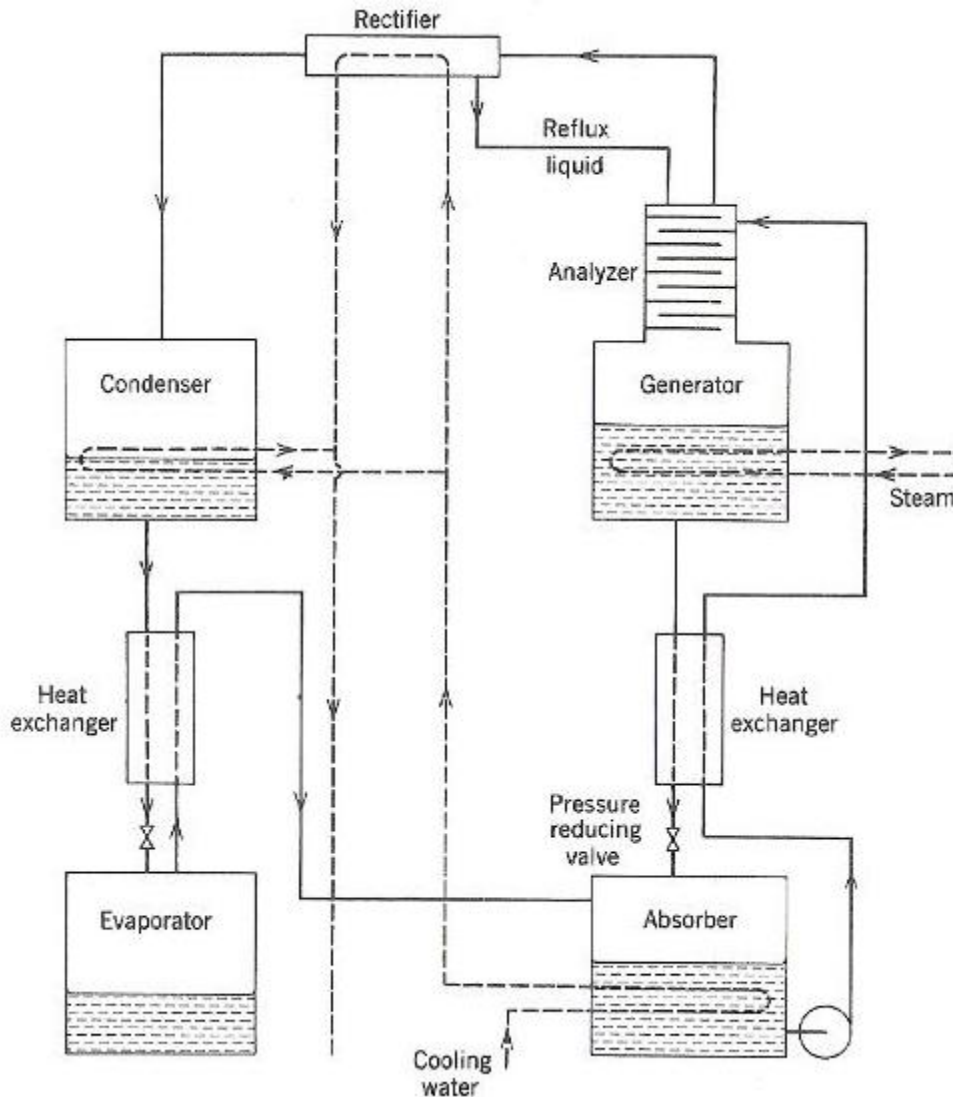Ammonia Water vapour absorption refrigeration system:

1) Evaporator: It is in the evaporator where the refrigerant pure ammonia (NH_3) in liquid state produces the cooling effect. It absorbs the heat from the substance to be cooled and gets evaporated. From here, the ammonia passes to the absorber in the gaseous state.

2) Absorber: In the absorber the weak solution of ammonia-water is already present. The water, used as the absorbent in the solution, is unsaturated and it has the capacity to absorb more ammonia gas. As the ammonia from evaporator enters the absorber, it is readily absorbed by water and the strong solution of ammonia-water is formed. During the process of absorption heat is liberated which can reduce the ammonia absorption capacity of water; hence the absorber is cooled by the cooling water. Due to absorption of ammonia, strong solution of ammonia-water is formed in the absorber.

3) Pump: The strong solution of ammonia and water is pumped by the pump at high pressure to the generator.

4) Generator: The strong solution of ammonia refrigerant and water absorbent are heated by the external source of heat such as steam or hot water. It can also be heated by other sources like natural gas, electric heater, waste exhaust heat etc. Due to heating the refrigerant ammonia gets vaporized and it leaves the generator. However, since water has strong affinity for ammonia and its vaporization point is quite low some water particles also get carried away with ammonia refrigerant, so it is important to pass this refrigerant through analyzer.

5) Analyzer: One of the major disadvantages of the ammonia-water vapor absorption refrigeration system is that the water in the solution has quite low vaporizing temperature, hence when ammonia refrigerant gets vaporized in the generator some water also gets vaporized. Thus the ammonia refrigerant leaving the generator carries appreciable amount of water vapor. If this water vapor is allowed to be carried to the evaporator, the capacity of the refrigeration system would reduce. The water vapor from ammonia refrigerant is removed by analyzer and the rectifier.

The analyzer is a sort of the distillation column that is located at the top of the generator. The analyzer consists of number of plates positioned horizontally. When the ammonia refrigerant along with the water vapor particles enters the analyzer, the solution is cooled. Since water has higher saturation temperature, water vapor gets condensed into the water particles that drip down into the generator. The ammonia refrigerant in the gaseous state continues to rise up and it moves to the rectifier.

6) Rectifier or the reflex condenser: The rectifier is a sort of the heat exchanger cooled by the water, which is also used for cooling the condenser. Due to cooling the remaining water vapor mixed with the ammonia refrigerant also gets condensed along with some particles of ammonia. This weak solution of water and ammonia drains down to the analyzer and then to the generator.

7) Condenser and expansion valve: The pure ammonia refrigerant in the vapor state and at high pressure then enters the condenser where it is cooled by water. The refrigerant ammonia gets converted into the liquid state and it then passes through the expansion valve where its temperature and pressure falls down suddenly. Ammonia refrigerant finally enters the evaporator, where it produces the cooling effect. This cycle keeps on repeating continuously.


Meanwhile, when ammonia gets vaporized in the generator, weak solution of ammonia and water is left in it. This solution is expanded in the expansion valve and passed back to the absorber and its cycle repeats.

Lithium Bromide-Water vapour absorption refrigeration system:

This refrigeration system is used for large tonnage capacity. In this system, lithium-bromide is acting as the absorbent and water is acting as refrigerant. Thus in the absorber the lithium bromide absorbent absorbs the water refrigerant and solution of water and lithium bromide is formed. This solution is pumped by the pump to the generator where the solution is

heated. The water refrigerant gets vaporized and moves to the condenser where it is heated while lithium bromide flows back to the absorber where it further absorbs water coming from the evaporator.

The water-lithium bromide vapor absorption system is used in a number of air conditioning applications. This system is useful for the applications where the temperature required is more than 32 degree F.

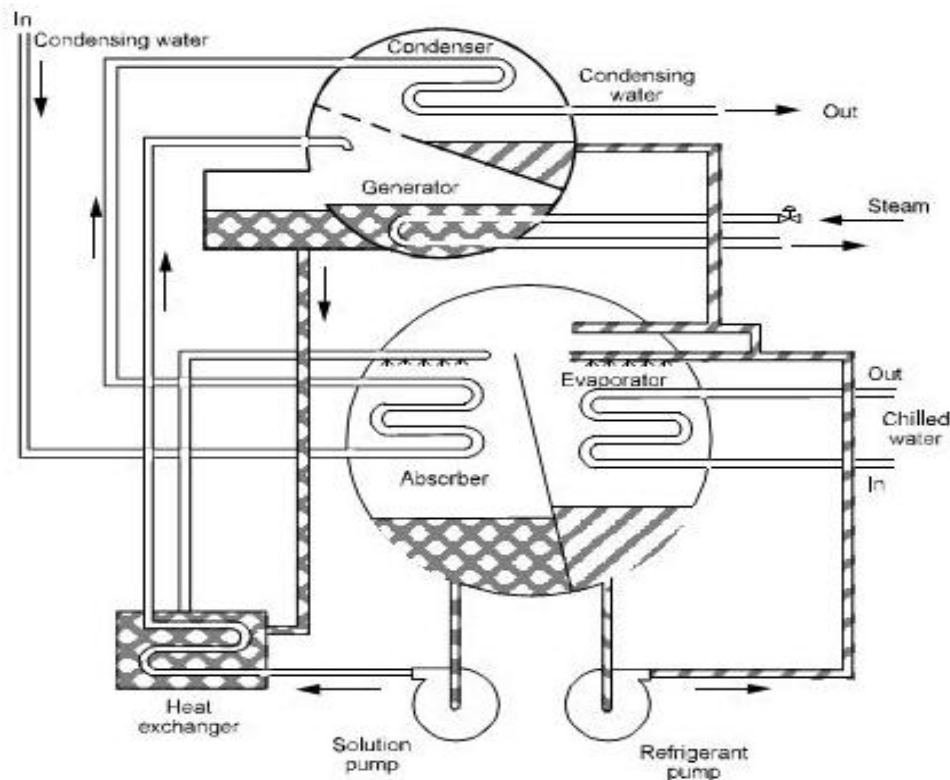

Special Features of Water-Lithium Bromide Solution

Here are some special features of the water and lithium bromide in absorption refrigeration system:

1) As such lithium bromide has great affinity for water vapor, however, when the water-lithium bromide solution is formed, they are not completely soluble with each other under all the operating conditions of the absorption refrigeration system. Hence, when the water-lithium bromide absorption refrigeration system is being designed, the designer must take care that such conditions would not be created where the crystallization and precipitation of lithium bromide would occur.

2) The water used as the refrigerant in the absorption refrigeration system means the operating pressures in the condenser and the evaporator would be very low. Even the difference of pressure between the condenser and the evaporator are very low, and this can be achieved even without installing the expansion valve in the system, since the drop in pressure occurs due to friction in the refrigeration piping and also in the spray nozzles.

3) The capacity of any absorption refrigeration system depends on the ability of the absorbent to absorb the refrigerant, which in turn depends on the concentration of the absorbent. To increase the capacity of the system, the concentration of absorbent should be increased, which would enable absorption of more refrigerant. Some of the most common methods used to change the concentration of the absorbent are: controlling the flow of the steam or hot water to the generator, controlling the flow of water used for condensing in the condenser, and re-concentrating the absorbent leaving the generator and entering the absorber.

Parts of the Water-Lithium Bromide Absorption Refrigeration and their Working

Let us see various parts of the water-lithium bromide absorption refrigeration and their working (please refer the figure above):

1) Evaporator: Water as the refrigerant enters the evaporator at very low pressure and temperature. Since very low pressure is maintained inside the evaporator the water exists in the partial liquid state and partial vapor state. This water refrigerant absorbs the heat from the substance to be chilled and gets fully evaporated. It then enters the absorber.

2) Absorber: In the absorber concentrated solution of lithium bromide is already available. Since water is highly soluble in lithium bromide, solution of water-lithium bromide is formed. This solution is pumped by the pump to the generator.

3) Generator: The heat is supplied to the refrigerant water and absorbent lithium bromide solution in the generator from the steam or hot water. Due to heating water gets vaporized and it moves to the condenser, where it gets cooled. As water refrigerant moves further in the refrigeration piping and through nozzles, its pressure reduces and so also the temperature. This water refrigerant then enters the evaporator where it produces the cooling effect. This cycle is repeated continuously. Lithium bromide on the other hand, leaves the generator and reenters the absorber for absorbing water refrigerant.

As seen in the image above, the condenser water is used to cool the water refrigerant in the condenser and the water-Li Br solution in the absorber. Steam is used for heating water-Li Br solution in the generator. To change the capacity of this water-Li Br absorption refrigeration system the concentration of Li Br can be changed.

Comparison between vapour compression and vapour absorption systems:

Compression systems	Absorption systems
Work operated	Heat operated
High COP	Low COP (currently maximum ≈ 1.4)
Performance (COP and capacity) very sensitive to evaporator temperatures	Performance not very sensitive to evaporator temperatures
System COP reduces considerably at part loads	COP does not reduce significantly with load
Liquid at the exit of evaporator may damage compressor	Presence of liquid at evaporator exit is not a serious problem
Performance is sensitive to evaporator superheat	Evaporator superheat is not very important
Many moving parts	Very few moving parts
Regular maintenance required	Very low maintenance required
Higher noise and vibration	Less noise and vibration
Small systems are compact and large systems are bulky	Small systems are bulky and large systems are compact

Psychrometry:

Psychrometry is the science of studying thermodynamic properties of moist air and the use of these to analyze conditions and processes involving moist air.

Terminologies used in Psychrometry:**Dry-Bulb Temperature - T_{db}**

Dry-Bulb Temperature, usually referred to as the air temperature, is the air property that is most commonly used. People referring to air temperature normally referring to Dry Bulb Temperature.

Dry-Bulb Temperature - T_{db} - can be measured by using a normal thermometer. With Dry-Bulb Temperature the sensible heat content in the air can be determined along the bottom axis of the psychrometric chart. The vertical lines extending upward from this axis are constant-temperature lines.

Wet-Bulb Temperature - T_{wb}

Wet-Bulb Temperature is associated with the moisture content of the air.

Wet Bulb Temperature can be measured with a thermometer that has the bulb covered with a water-moistened bandage with air flowing over the thermometer.

Wet-Bulb Temperatures are always lower than dry bulb temperatures with less than 100% relative humidity in the air. The Wet-Bulb Temperature and the Dry-Bulb Temperature will be identical with 100% relative humidity in the air (the air is at the saturation line).

On the chart, the Wet-Bulb Temperature lines slopes a little upward to the left, and the temperature is read at the saturation line.

Relative Humidity - RH

Relative Humidity is the ratio of water vapor pressure - p_w , to the water vapor pressure of saturated air at the same temperature - p_{ws} , expressed as a percentage. Relative humidity is a relative measure.

The moisture-holding capacity of air increases with air temperature. In practice the relative humidity will indicate the moisture level of the air compared to the maximum moisture-holding capacity of air at saturation.

Dew Point Temperature - T_{dp}

Dew Point is the temperature at which water vapor starts to condense in the air - the temperature at which air becomes completely saturated. Above this temperature the moisture stays in the air.

The Dew Point Temperature can be read in the psychrometric charts by following the horizontal line from the state-point to the saturation line. The Dew Point Temperature is represented along the 100% relative humidity line.

Specific Volume of Humid Air - v

Specific Volume represents the space occupied by a unit weight of dry air (ft^3/lb , m^3/kg). Specific volume is indicated along the bottom axis of the psychrometric chart with the constant-volume lines slanting upward to the left.

Moisture Content and Humidity Ratio - x

Moisture Content and **Humidity Ratio** is the amount of water vapor by weight in dry air.

The moisture content of air is expressed as the weight of water vapor per unit weight of dry air (lb_{H_2O}/lb_{air} , kg_{H_2O}/kg_{air}).

Humidity ratio is indicated along the right-hand axis in psychrometric charts.

Enthalpy - h



Enthalpy is the measure of the total thermal energy in air.

Energy content is expressed as energy per unit weight of air (Btu/lb_{air} , J/kg_{air}).

Enthalpy in the psychrometric chart can read from where the appropriate wet-bulb line crosses the diagonal scale above the saturation curve.

Air with the same amount of energy may either be drier hotter air (higher sensible heat) or cooler moister air (higher latent heat).


Psychrometric Chart:

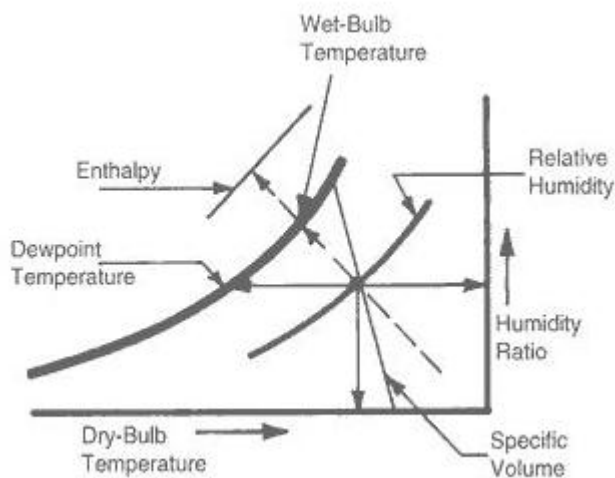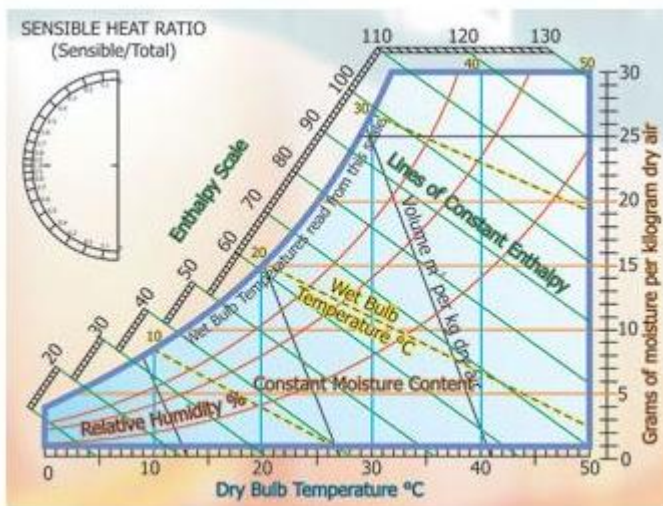

Psychrometric Processes:**Sensible Cooling:**


The sensible cooling of air is the process in which only the sensible heat of the air is removed so as to reduce its temperature, and there is no change in the moisture content (kg/kg of dry air) of the air. During sensible cooling process the dry bulb (DB) temperature and wet bulb (WB) temperature of the air reduces, while the latent heat of the air, and the dew point (DP) temperature of the air remains constant. There is overall reduction in the enthalpy of the air.

The sensible cooling process is represented by a straight horizontal line on the psychrometric chart. The line starts from the initial DB temperature of the air and ends at the final DB temperature of the air extending towards the left side from high temperature to the low temperature (see the figure below). The sensible cooling line is also the constant DP temperature line since the moisture content of the air remains constant. The initial and final points on the psychrometric chart give all the properties of the air.

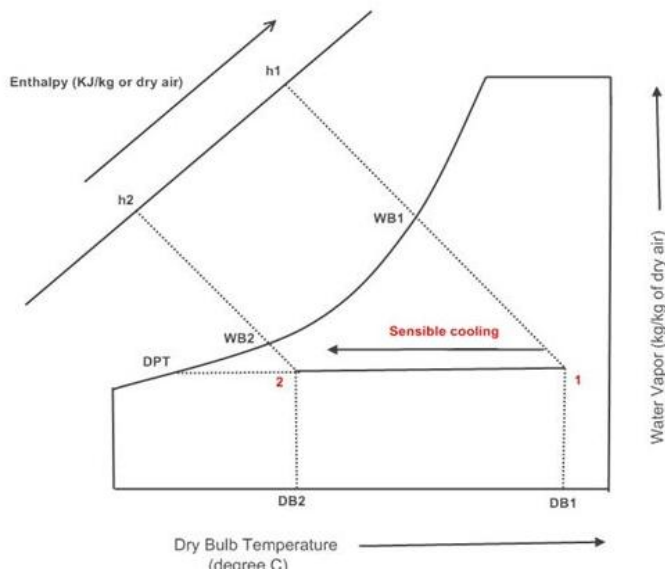**Sensible Heating:**

Sensible heating process is opposite to sensible cooling process. In sensible heating process the temperature of air is increased without changing its moisture content. During this process the sensible heat, DB and WB temperature of the air increases while latent of air, and the DP point temperature of the air remains constant.


Like the sensible cooling, the sensible heating process is also represented by a straight horizontal line on the psychrometric chart. The line starts from the initial DB temperature of air and ends at the final temperature extending towards the right (see the figure). The sensible heating line is also the constant DP temperature line.

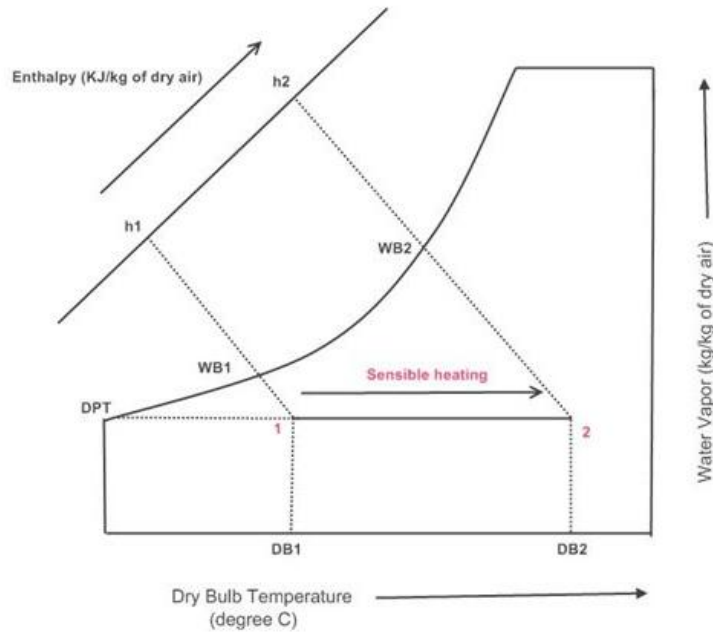

Cooling and Humidification:



During the cooling and humidification process the dry bulb of the air reduces, its wet bulb and the dew point temperature increases, while its moisture content and thus the relative humidity also increases. Also, the sensible heat of the air reduces, while the latent heat of the air increases resulting in the overall increase in the enthalpy of the air.

Cooling and humidification process is represented by an angular line on the psychrometric chart starting from the given value of the dry bulb temperature and the relative humidity and extending upwards toward left.

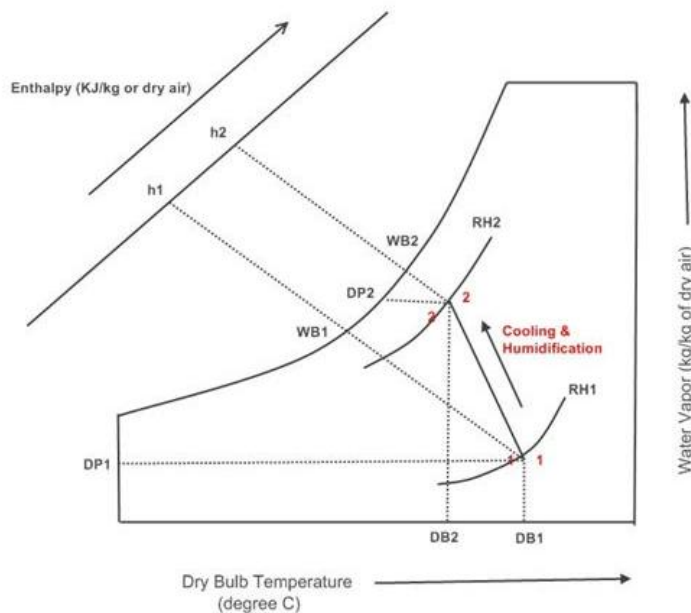


Heating and Dehumidification:

During the heating and dehumidification process dry bulb temperature of the air increases while its dew point and wet bulb temperature reduces. On the psychrometric chart, this process is represented by a straight angular line starting from the given DB temperature conditions and extending downwards towards right to the final DB temperature conditions.

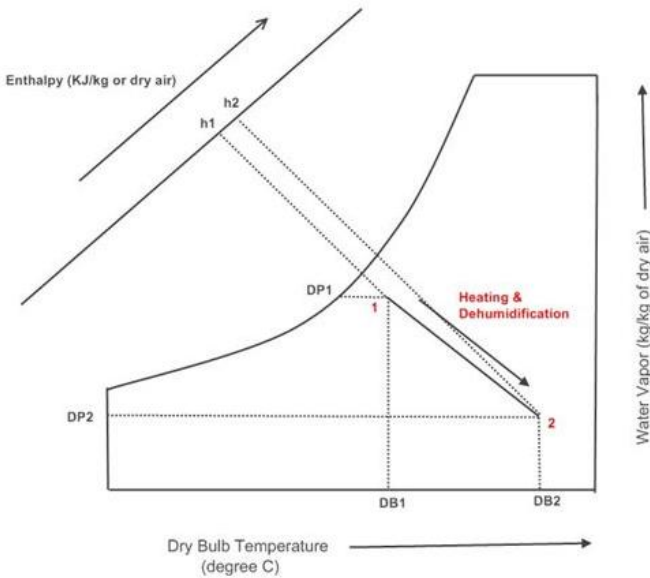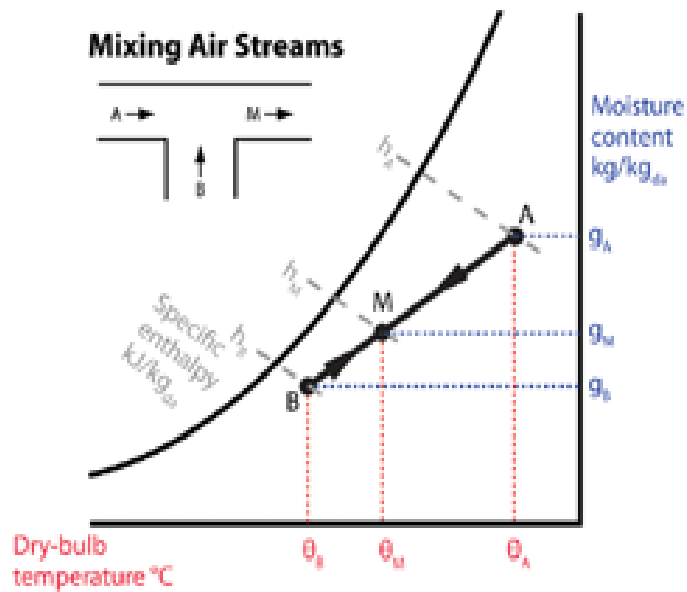**Adiabatic Mixing:**

Saturated air leaving the cooling section of an air conditioning system at $T_1^\circ\text{C}$ at a rate of V_1 (m^3/min) is mixed adiabatically with outside air at $T_2^\circ\text{C}$ and RH_2 percent relative humidity at a rate of V_2 (m^3/min). Assuming that the mixing process occurs at a pressure of $P(\text{atm})$, determine the specific humidity, the relative humidity, the dry-bulb temperature, and the volume flow rate of the mixture.

Adiabatic Humidification:

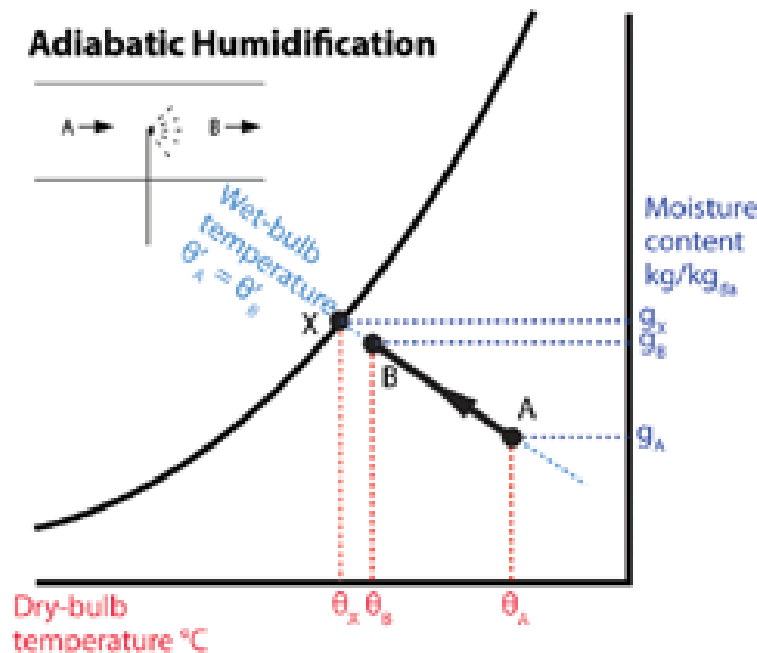

Adiabatic humidification occurs when water vapour is added to the atmosphere.

Specific humidity will increase, along the wet bulb temperature line. Reduction in dry bulb temperature will happen as, the evaporated water will absorb heat.

A humidifier will perform this function.

Cooling Load Calculation:

Load due to heat transfer:

1. Cooling Load Temperature Difference

The space sensible cooling load Q_{rs} is calculated as:

$$Q_{rs} = A \cdot U \cdot \text{CLTD}$$

where A = area of external wall or roof

U = overall heat transfer coefficient of the external wall or roof.

CLTD values are found from tables.

2.Cooling Load Factor:

The cooling load factor is defined as:

$$CLF = \frac{\text{sensible cooling load}}{\text{sensible heat gain}} = \frac{Q_{rs}}{Q_{es}}$$

3.Conduction Heat Gain through Roofs (Q_{rs}) and External Walls (Q_{ws})

The space cooling load due to the conduction heat gain through roofs or external walls is calculated as:

$$Q_{rs} \text{ (or } Q_{ws} \text{)} = A \cdot U \cdot CLTD$$

where A = area for external walls or roofs

U = overall heat transfer coefficient for external walls or roof

4.Electric Lighting

Space cooling load due to the heat gain from electric lights is often the major component for commercial buildings having a larger ratio of interior zone. Electric lights contribute to sensible load only. Sensible heat released from electric lights is in two forms:

- (i) convective heat from the lamp, tube and fixtures.
- (ii) radiation absorbed by walls, floors, and furniture and convected by the ambient air after a time lag.

The sensible heat released (Q_{les}) from electric lights is calculated as:

$$Q_{les} = \text{Input} \cdot F_{use} \cdot F_{al}$$

where Input = total light wattage obtained from the ratings of all fixtures installed

Fuse = use factor defined as the ratio of wattage in use possibly at design condition to the installation condition

Fal = special allowance factor for fluorescent fixtures accounting for ballast loss, varying from 1.18 to 1.30

The corresponding sensible space cooling load (Q_{ls}) due to heat released from electrical light is:

$$Q_{ls} = \text{Input} \cdot F_{use} \cdot F_{al} \cdot CLF$$

CLF is a function of

- (i) number of hours that electric lights are switched on (for 24 hours continuous lighting, CLF = 1), and
- (ii) types of building construction and furnishings.

Therefore, CLF depends on the magnitude of surface and the space air flow rates.

Load due to heat generation:

Classification of heat loads:

Sensible Heat

Sensible heat is the heat absorbed or given off by a substance that is NOT in the process of changing its physical state. Sensible heat can be sensed, or measured, with a thermometer, and the addition or removal of sensible heat will always cause a change in the temperature of the substance.

Latent Heat

Latent heat is the heat absorbed or given off by a substance while it is changing its physical state. The heat absorbed or given off does NOT cause a temperature change in the substance- the heat is latent or hidden. In other words, sensible heat is the heat that affects the temperature of things; latent heat is the heat that affects the physical state of things.

Concepts of GSHP, RSHP, ESHF:

Gross Sensible Heat Factor:

It is defined as the ratio of gross sensible heat to the gross total heat.

$$\text{GSHF} = \text{GSH} / \text{GTH}$$

Effective Sensible Heat Factor:

It is the ratio of effective room sensible heat to the effective room total heat.

$$\text{ESHF} = \text{ERSH} / \text{ERTH}$$


Room Sensible Heat Factor:


It is the ratio of room sensible heat to the room total heat.

Types of Air- Conditioning System:

Central Systems:

The central air conditioning system is used for cooling big buildings, houses, offices, entire hotels, gyms, movie theaters, factories etc. If the whole building is to be air conditioned, HVAC engineers find that putting individual units in each of the rooms is very expensive initially as well in the long run. The central air conditioning system is comprised of a huge compressor that has the capacity to produce hundreds of tons of air conditioning. Cooling big halls, malls, huge spaces, galleries etc is usually only feasible with central conditioning units.

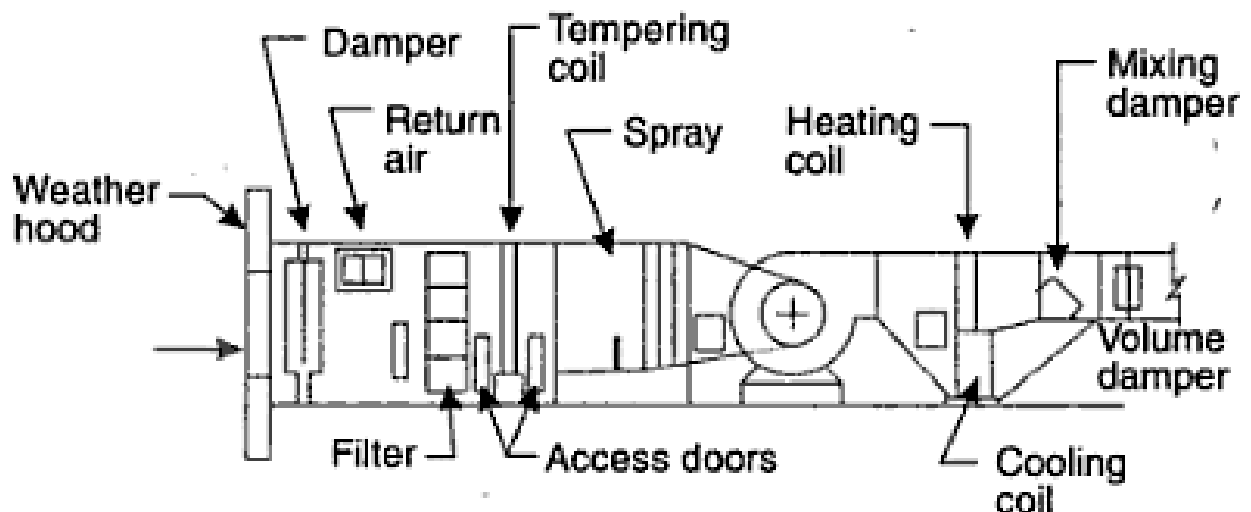

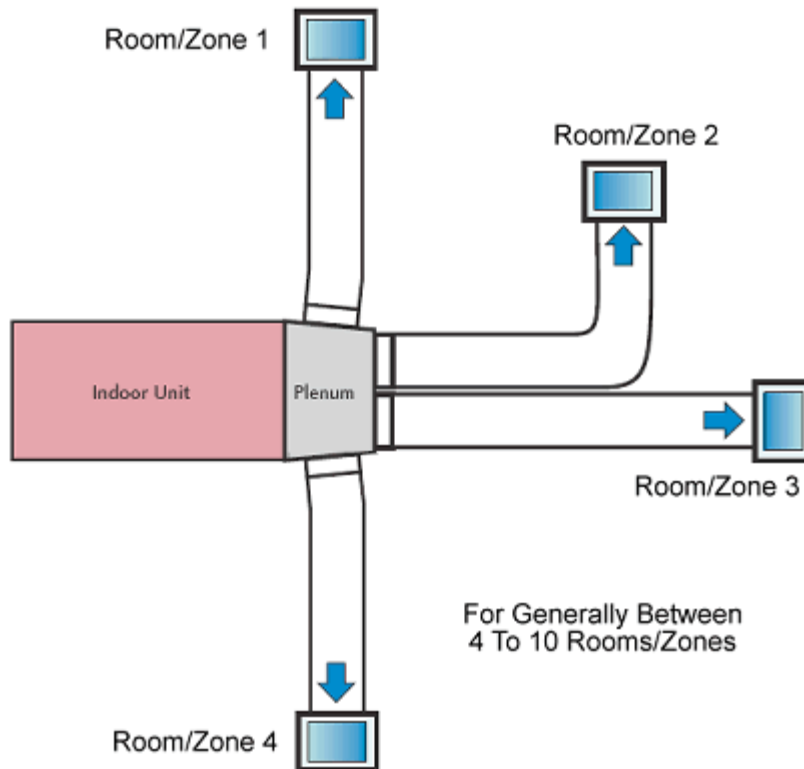
Zoned Systems:

A zoned air conditioning system using a room air terminal which has the same horizontal dimensions as a floor tile of a raised tile floor such that the terminal may replace one tile in such a floor. The terminal includes a cool air inlet below the floor for drawing in cooling air circulated in the under floor space and a return air inlet in the top surface of the terminal. The cool air and return air is mixed in a mixing chamber and drawn from the mixing chamber by a fan and returned to the room through an outlet vent. The ratio of cool air to return air mixed in the mixing chamber is controlled by a modulating damper which is controlled in response to the temperature of the return air in order to control the room temperature in the region of the terminal in accordance with an adjustable set point. A heater is also provided in the terminal for those occasions where the return air is cooler than the set point.

Unitary Systems:

A unitary air conditioning system comprises an outdoor unit including a compressor for compressing a refrigerant, an outdoor heat exchanger for heat exchange of the refrigerant and an expander connected to the outdoor heat exchanger, for expanding the refrigerant; a duct installed inside a zone of a building; a central blower unit having a heat exchanger connected to the outdoor unit through a first refrigerant pipe and a blower for supplying the air heat-exchanged by

the heat exchanger to the duct; and an individual blower unit including a heat exchanger connected to the outdoor unit through a second refrigerant pipe and a fan for sending the air heat-exchanged by the heat exchanger and disposed in a zone in the building, for individually cooling or heating the zone. Accordingly, cooling or heating operation is performed on each zone of the building, and simultaneously, additional individual heating or cooling operation can be performed on a specific space, so that a cost can be reduced, and cooling or heating in the building can be efficiently performed.

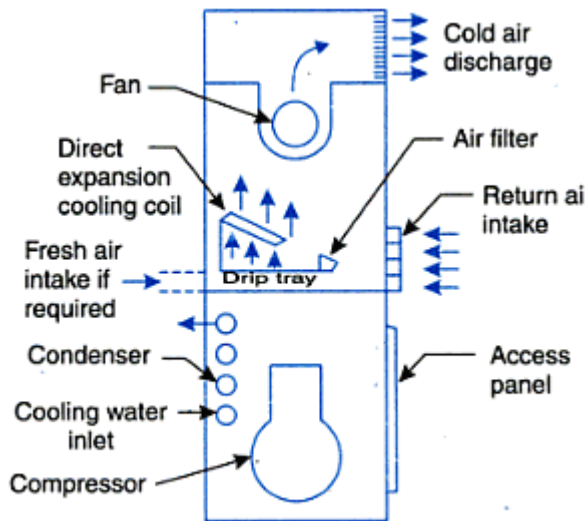

Window Air-conditioning System:


It is the most commonly used air conditioner for single rooms. In this air conditioner all the components, namely the compressor, condenser, expansion valve or coil, evaporator and cooling coil are enclosed in a single box. This unit is fitted in a slot made in the wall of the room, or often a window sill.

Windows air conditioners are one of the most widely used types of air conditioners because they are the simplest form of the air conditioning systems. Window air conditioner comprises of the rigid base on which all the parts of the window air conditioner are assembled. The base is assembled inside the casing which is fitted into the wall or the window of the room in which the air conditioner is fitted.

The whole assembly of the window air conditioner can be divided into two compartments: the room side, which is also the cooling side and the outdoor side from where the heat absorbed by the room air is liberated to the atmosphere. The room side and outdoor side are separated from each other by an insulated partition enclosed inside the window air conditioner assembly (refer fig 1 below).

In the front of the window air conditioner on the room side there is beautifully decorated front panel on which the supply and return air grills are fitted (the whole front panel itself is commonly called as front grill). The louvers fitted in the supply air grills are adjustable so as to

supply the air in desired direction. There is also one opening in the grill that allows access to the control panel or operating panel in front of the window air conditioner.

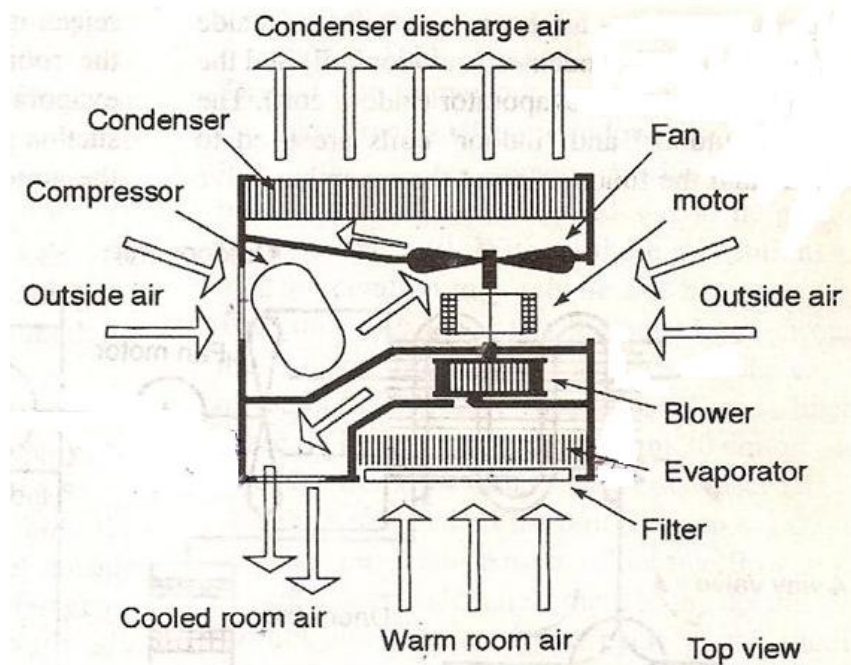


1) Blower: This is the small blower that is fitted behind the evaporator or cooling coil inside the assembly of the window air conditioner system. The blower sucks the air from the room which first passes over the air filter and gets filtered. The air then passes over the cooling coil and gets chilled. The blower then blows this filtered and chilled air, which passes through the supply air compartment inside the window air conditioner assembly. This air is then delivered into the room from the supply air grill of the front panel.

2) Propeller fan or the condenser fan: The condenser fan is the forced draft type of propeller fan that sucks the atmospheric air and blows it over the condenser. The hot refrigerant inside the condenser gives up the heat to the atmospheric air and its temperature reduces.

3) Fan motor: The motor inside the window air conditioner assembly is located between the condenser and the evaporator coil. It has double shaft on one side of which the blower is fitted and on the other side the condenser fan is fitted. This makes the whole assembly of the blower, the condenser fan and the motor highly compact.

Split Air- Conditioning System:

The split air conditioner comprises of two parts: the outdoor unit and the indoor unit. The outdoor unit, fitted outside the room, houses components like the compressor, condenser and expansion valve. The indoor unit comprises the evaporator or cooling coil and the cooling fan. For this unit you don't have to make any slot in the wall of the room. Further, the present day split units have aesthetic looks and add to the beauty of the room. The split air conditioner can be used to cool one or two rooms.

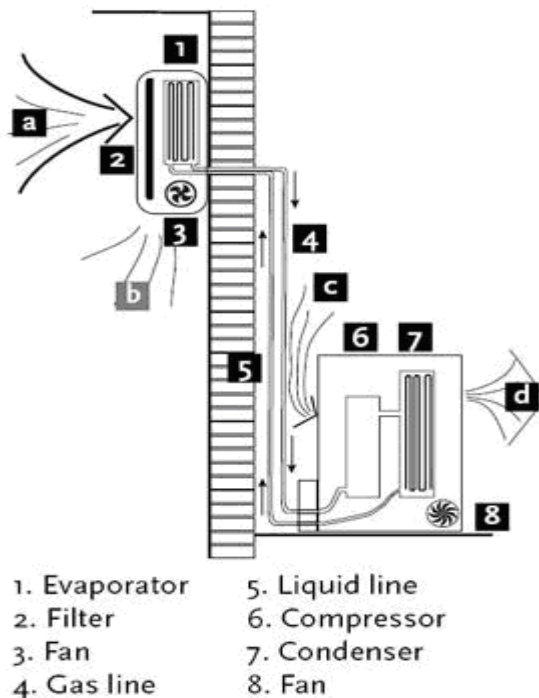

1) Evaporator Coil or the Cooling Coil:

The cooling coil is a copper coil made of number turns of the copper tubing with one or more rows depending on the capacity of the air conditioning system. The cooling coil is covered with the aluminum fins so that the maximum amount of heat can be transferred from the coil to the air inside the room.

The refrigerant from the tubing at very low temperature and very low pressure enters the cooling coil. The blower absorbs the hot room air or the atmospheric air and in doing so the air passes over the cooling coil which leads to the cooling of the air. This air is then blown to the room where the cooling effect has to be produced. The air, after producing the cooling effect is again sucked by the blower and the process of cooling the room continues.

After absorbing the heat from the room air, the temperature of the refrigerant inside the cooling coil becomes high and it flows back through the return copper tubing to the compressor inside the outdoor unit. The refrigerant tubing supplying the refrigerant from the outdoor unit to the indoor unit and that supplying the refrigerant from indoor unit to the outdoor unit are both covered with the insulation tape.

2) Air Filter:

The air filter is very important part of the indoor unit. It removes all the dirt particles from the room air and helps supplying clean air to the room. The air filter in the wall mounted type of the indoor unit is placed just before the cooling coil. When the blower sucks the hot room air, it is first passed through the air filter and then through the cooling coil. Thus the clean air at low temperature is supplied into the room by the blower.

3) Cooling Fan or Blower:

Inside the indoor unit there is also a long blower that sucks the room air or the atmospheric air. It is an induced type of blower and while it sucks the room air it is passed over the cooling coil and the filter due to which the temperature of the air reduces and all the dirt from it is removed. The blower sucks the hot and unclean air from the room and supplies cool and clean air back. The shaft of the blower rotates inside the bushes and it is connected to a small multiple speed motor, thus the speed of the blower can be changed. When the fan speed is changed with the remote it is the speed of the blower that changes.

4) Drain Pipe:

Due to the low temperature refrigerant inside the cooling coil, its temperature is very low, usually much below the dew point temperature of the room air. When the room air is passed over the cooling coil due to the suction force of the blower, the temperature of the air becomes very low and reaches levels below its dew point temperature. Due to this the water vapor present in the air gets condensed and dew or water drops are formed on the surface of the cooling coil. These water drops fall off the cooling coil and are collected in a small space inside the indoor unit. To remove the water from this space the drain pipe is connected from this space extending to some external place outside the room where water can be disposed off. Thus the drain pipe helps removing dew water collected inside the indoor unit.

To remove the water efficiently the indoor unit has to be tilted by a very small angle of about 2 to 3 degrees so that the water can be collected in the space easily and drained out. If this angle is in opposite direction, all the water will get drained inside the room. Also, if the tilt angle is too high, the indoor unit will shabby inside the room.

5) Louvers or Fins:

The cool air supplied by the blower is passed into the room through louvers. The louvers help changing the angle or direction in which the air needs to be supplied into the room as per the requirements. With louvers one easily changes the direction in which the maximum amount of the cooled air has to be passed.

There are two types of louvers: horizontal and vertical. The horizontal louvers are connected to a small motor and their position can be set by the remote control. One can set a fixed position for the horizontal louvers so that chilled air is passed in a particular direction only or one can keep it in rotation mode so that the fresh air is supplied throughout the room. The vertical louvers are

operated manually and one can easily change their position as per the requirements. The horizontal louvers control flow of air in upper and downward directions of the room, while vertical louvers control movement of air in left and right directions.

Sample Problems:

1. A sling psychrometer in a lab test recorded the following readings DBT=35°C, WBT=25°C
Calculate the following

Specific humidity

Relative humidity

Vapor density in air

Dew point temperature.

Enthalpy of mixing per kg of air take atmospheric pressure=1.0132 bar.

2. A food storage locker requires a refrigeration system of 12 tons capacity at an evaporator temperature of -8°C and a condenser temperature of 30°C. The refrigerant freon-12 is sub cooled to 25°C before entering the expansion valve and the vapour is superheated to -2°C before entering the compressor. The compression of the refrigerant is reversible adiabatic. A double action compressor with stroke equal to 1.5 times the bore is to be used operating at 900 rpm, Determine,

- COP
- Theoretical piston displacement/min
- Mass of refrigerant to be circulated/min
- Theoretical bore and stroke of the compressor.

Take liquid specific heat of refrigerant as 1.23 kJ/kg K and the specific heat of vapour refrigerant is 0.732 kJ/kg K.

3. A vapour compression refrigerator working with Freon-12 has its temperature range -10°C and 30°C. The Vapour enters the compressor dry and under cooled by 5°C in the condenser. For a capacity of 15 TOR, find: (a)C.O.P (b) mass of freon (c) Power required.

Cp for vapour = 0.56kJ/kgK

Cp for liquid = 1.003kJ/kgK

Refer tables for properties of Freon 12 .

DEPARTMENT OF MECHANICAL ENGINEERING

Question Bank

ME6404 - THERMAL ENGINEERING

UNIT I GAS POWER CYCLES

Part-A (2 Marks)

1. What is a thermodynamic cycle?
2. What is meant by air standard cycle?
- 3.. Name the various “gas power cycles”.
4. What are the assumptions made for air standard cycle analysis
5. Mention the various processes of the Otto cycle..
6. Mention the various processes of diesel cycle.
7. Mention the various processes of dual cycle.
9. Define air standard cycle efficiency.
10. Define mean effective pressure as applied to gas power cycles. How it is related to indicate power of an I.C engine?
11. Define the following terms. (i) Compression ratio (ii) Cut off ratio , (iii) .Expansion ratio

Part-B (16Marks)

1. Drive and expression for the air standard efficiency of Otto cycle in terms of volume ratio.
2. Drive an expression for the air standard efficiency of Diesel cycle.
3. Drive an expression for the air standard efficiency of Dual cycle. .

4. Explain the working of 4 stroke cycle Diesel engine. Draw the theoretical and actual PV diagram.
5. Drive the expression for air standard efficiency of Brayton cycle in terms of pressure ratio
6. A Dual combustion air standard cycle has a compression ratio of 10. The constant pressure part of combustion takes place at 40 bar. The highest and the lowest temperature of the cycle are 1725 degree C and 27 0 C respectively. The pressure at the beginning of compression is 1 bar. Calculate (I) the pressure and temperature at key points of the cycle. (ii) The heat supplied at constant volume, (iii) the heat supplied at constant pressure. (iv) The heat rejected. (v) the work output. (vi) the efficiency and (vii) mep.
7. An Engine-working on Otto cycle has a volume of 0.45 m³ , pressure 1 bar and temperature 300°C at the beginning of compression stroke. At the end of compression stroke, the pressure is 11 bar and 210 KJ of heat is added at constant volume. Determine (i) Pressure, temperature and volume at salient points in the cycle. (ii) Efficiency.
8. (I) Explain the working of 4-stroke cycle Diesel engine. Draw the theoretical and actual valve- timing diagram for the engine. explain the reasons for the difference.
9. (II) Air enters the compressor of a gas turbine at 100 KPa and 25 0 C. For a pressure ratio of 5 and a maximum temperature of 850°C. Determine the thermal efficiency using the Brayton cycle. The following data is referred for an air standard diesel cycle compression ratio = 15 heat added = 200 KJ/Kg- minimum temperature in the cycle = 25°C Suction pressure = 1 bar Calculate
 1. Pressure and temperature at the Salient point.
 2. Thermal efficiency
 3. Mean effective pressure,
 4. Power output of the cycle If flow rate of air is 2 Kg/s

UNIT II INTERNAL COMBUSTION ENGINES

Part-A (2 Marks)

01. Classify IC engine according to cycle of lubrication system and field of application.

Types of lubrication system

02. List the various components of IC engines.

03. Name the basic thermodynamic cycles of the two types of internal combustion reciprocating engines.

04. Mention the important requites of liner material.

05. State the purpose of providing piston in IC engines.

06. Define the terms as applied to reciprocating I.C. engines "Mean effective pressure" and "Compression ratio".

07. What is meant by highest useful compression ratio?

08. What are the types of piston rings?

09. What is the use of connecting rod?

10. What is the use of flywheel?

Part-B (16Marks)

1. Explain full pressure lubrication system I.C Engine .

2. Explain the water cooling system in I.C Engine .

3. Explain the 2 types of Ignition system In 5.1 Engine .

4. Draw and explain the valve timing diagram of 4 stroke Diesel Engine .

5. Draw and explain the port timing diagram of 2stroke Petrol Engine .

6. Explain with neat sketch the exhaust gas analysis .

7. The following results refer to a test on a petrol engine Indicated power = 30 Kw,

Brake power = 26 Kw Engine speed = 1000 rpm

Fuel consumption = 0.35 kg/hour Calorific value of fuel = 43900 kJ/kg

Calculate The indicated Thermal efficiency The brake Thermal efficiency

The Mechanical efficiency

8. A four cylinder 2 stroke cycle petrol engine develops 23.5 kw brake power at

2500 rpm. The mean

effective pressure on each piston is 8.5 bar and mechanical efficiency is 85%

Calculate the diameter

and stroke of each cylinder assuming the length of stroke equal to 1.5 times the diameter of cylinder.

9. The following data to a particular twin cylinder two stroke diesel engine. Bore 15 cm stroke. 20 cm. speed 400 rpm. Indicated mean effective pressure 4 bar, dead weight on the brake drum 650 N. spring balance reading 25 N Diameter of the brake drum 1 m . Fuel consumption 0.075 kg/min and calorific value of the fuel is 44500 kJ/kg. Determine

1. Indicated Power

2. Brake Power

3. Mechanical efficiency

4. Indicated thermal efficiency

5. Brake thermal efficiency

Part-A (2 Marks)

01. What are the various types of nozzles and their functions?
02. Define nozzle efficiency and critical pressure ratio.
03. Explain the phenomenon of super saturated expansion in steam nozzle. or What is metastable flow?
04. State the function of fixed blades.
05. Classify steam turbines.
06. How does impulse work?
07. What is meant by carry over loss?
08. State the function of moving blades...."
09. What is the fundamental difference between the operation of impulse and reaction steam turbines?
10. What are the different methods of governing steam turbines?
11. How is throttle governing done?
12. Where nozzle control governing is used?
- 13.. Where by - pass governing is more suitable?
14. What are the different losses in steam turbines?

PART- B (16Marks)

1. An impulse turbine having a set of 16 nozzles receives steam at 20 bar, 400° C. The pressure of steam at exit is 12 bar. if the total discharge is 260 Kg/min and nozzle efficiency is 90% . Find the crosssectional area of each nozzle, if the steam has velocity of 80m/s at entry to the nozzle, find the percentage Increase In discharge.

2. Dry saturated steam at a pressure of 8 bar enters the convergent divergent nozzle and leaves it at a pressure 1.5 bar. If the flow isentropic and if the corresponding index of expansion is 1.133, find the ratio of 0.3 are at exit and throat for max. discharge.
3. Steam enters a group of nozzles of a steam turbine at 12 bar and 2200 C and leaves at 1.2 bar. The steam turbine develops 220 Kw with a specific steam consumption of 13.5 Kg/ Kw. Hr. If the diameter of nozzle at throat is 7mm . Calculate the number of nozzle
4. Drive an expression for critical pressure ratio in terms of the index of expansion
5. Explain the method of governing in steam turbine.
6. Explain various type of compounding in Turbine
7. A 50% reaction turbine running at 400 rpm has the exit angle of blades as 20° and the velocity of steam relative to the blade at the exit is 1.35 times mean speed of the blade. The steam flow rate is 8.33 kg/s and at a particular stage the specific volume is $1.38 \text{ m}^3/\text{kg}$.Calculate, suitable blade height, assuming the rotor mean diameter 12 times the blade height, and diagram work.
8. The blade angle of a single ring of an impulse turbine is 300 m/s and the nozzle angle is 20° . The isentropic heat drop is 473 kJ/kg and nozzle efficiency is 85%. Given the blade velocity coefficient is 0.7 and the blades are symmetrical, Draw the velocity diagram and calculate for a mass flow of 1 kg/s i) axial thrust on blade ii) steam consumption per BP hour if the mechanical efficiency is 90% iii) blade efficiency and stage efficiency.

01. What is meant by single acting compressor?
02. What is meant by double acting compressor?
03. What is meant by single stage compressor?
04. What is meant by multistage compressor?
05. Define isentropic efficiency
06. Define mean effective pressure. How is it related to the power of an I.C engine.
07. What is meant by free air delivered?
08. Explain how flow of air is controlled in a reciprocating compressor?
09. What factors limit the delivery pressure in reciprocating compressor?
10. Name the methods adopted for increasing isothermal efficiency of reciprocating air compressor.
11. Why clearance is necessary and what is its effect on the performance of reciprocating compressor?
12. What is compression ratio?
13. What is meant by inter cooler?

Part-B (16 Marks)

1. Derive an expression for the work done by single stage single acting reciprocating air compressor.
2. Derive an expression for the volumetric efficiency of reciprocating air compressors
3. Explain the construction and working of a root blower .
4. Explain the construction and working of a centrifugal compressor

5. Explain the construction and working of a sliding vane compressor and axial flow compressor
6. A single stage single acting air compressor is used to compress air from 1 bar and 22°C to 6 bar according to the law $PV^{1.25} = C$. The compressor runs at 125 rpm and the ratio of stroke length to bore of a cylinder is 1.5. If the power required by the compressor is 20 kW, determine the size of the cylinder.
7. A single stage single acting air compressor is used to compress air from 1.013 bar and 25°C to 7 bar according to law $PV^{1.3} = C$. The bore and stroke of a cylinder are 120mm and 150mm respectively. The compressor runs at 250 rpm. If clearance volume of the cylinder is 5% of stroke volume and the mechanical efficiency of the compressor is 85%, determine volumetric efficiency, power, and mass of air delivered per minute.
8. A two stage single acting air compressor compresses 2m^3 air from 1 bar and 20°C to 15 bar. The air from the low pressure compressor is cooled to 25°C in the intercooler. Calculate the minimum power required to run the compressor if the compression follows $PV^{1.25} = C$ and the compressor runs at 400 rpm.

UNIT V REFRIGERATION AND AIR-CONDITIONING

Part-A (2 Marks)

01. Name four important properties of a good refrigerant
02. What is the difference between air conditioning and refrigeration?

03. What is the function of the throttling valve in vapour compression refrigeration system?
04. In a vapour compression refrigeration system, where the highest temperature will occur?
05. The vapour absorption system can use low-grade heat energy in the generator. Is true or false?
06. Name any four commonly used refrigerants.
07. Explain unit of Refrigeration.
08. Why throttle valve is used in place of expansion cylinder for vapour compression refrigerant machine.
09. What are the effects of super heat and subcooling on the vapour compression cycle?
10. What are the properties of good refrigerant?
11. How are air-conditioning systems classified?
12. How does humidity affect human comfort?
13. What are the various sources of heat gain of an air-conditioned space?
14. What do you mean by the term infiltration in heat load calculations?

Part-B (16 Marks)

1. Draw neat sketch of simple vapor compression refrigeration system and explain.
2. Explain with sketch the working principle of aqua Ammonia refrigeration system.
3. Explain with sketch the working principle of water-Lithium bromide refrigeration system.
4. Briefly explain the cooling load calculation in air conditioning system.
5. Explain winter, summer, and year round Air Conditioning system.
6. Explain unitary Air Conditioning and central Air Conditioning system.

7. Explain any four psychometric processes with sketch.

8. A refrigeration system of 10.5 tonnes capacity at an evaporator temperature of -12°C and a condenser

temperature of 27°C is needed in a food storage locker. The refrigerant Ammonia is sub cooled by

6°C before entering the expansion valve. The compression in the compressor is of adiabatic type.

Find 1. Condition of vapor at outlet of the compressor. 2. Condition of vapor at the entrance of the

Evaporator 3. COP & power required.

9. A sling psychrometer in a lab test recorded the following readings

DBT = 35°C , WBT = 25°C

Calculate the following

1. Specific humidity

2. Relative humidity

3. Vapor density in air

4. Dew point temperature

5. Enthalpy of mixing per kg of air .take atmospheric pressure = 1.0132 bar.

ME6404 THERMAL ENGINEERING UNIT I

GAS POWER CYCLES

1. Define Thermodynamic cycles.

Thermodynamic cycle is defined as the series of processes performed on the system, so that the system attains to its original state.

2. Compare Internal combustion (I.C.) Engines and steam and other types of engines.

I.C. Engines are more compact and can be started quickly and also operate at higher speeds. The efficiency of I.C. Engines is higher compared to steam engines. I.C. Engines are extensively used in all types of transportation - road, rail, air and marine applications.

3. What are the types of I.C. Engines?

- a. Spark ignition (SI) engines operating on Otto cycle, also called petrol engines
- b. Compression ignition (CI) engines operating on Diesel cycle, also called diesel engines.
- c. Gas turbine engines operating on Brayton cycle

4. Compare reciprocating and rotary type engines

Reciprocating type I.C. engines are suitable for small and medium sizes. These run at lower speeds but are more efficient compared to gas turbines. Vibration, wear and tear are more. Turbine engines are suitable for higher capacities. These are very light and compact for such sizes. (engine weight 0.1 kg / kW compared to 1 kg / kW for reciprocating type)

5. Compare SI and CI engines.

SI engines use lower compression ratio (8 -10) and so are less efficient, but are lower in weight and more compact as these run at higher speeds . Combustion is smoother and hence vibration is less. These are used in cars and two wheelers and small emergency electrical generators.

CI engines use higher compression ratios (16 -18) and so are more efficient but weight/KW is more. The speed of CI engines is limited to almost 3000 rpm due to combustion problems. These are extensively used in all road, rail and marine transport applications and also for standby and emergency electrical generation.

6. Compare two stroke cycle and four stroke cycle engine operation.

Four stroke cycle operation requires 2 revolutions per cycle as compared one revolution required for 2 stroke cycle operation. Hence two stroke cycle operation will give more power for a given displacement volume and so will be more compact for a given power. Two stroke cycle engines need fewer components and are lighter. However these are less efficient at part load operation. Hence these are extensively used only in smaller sizes as in two wheelers and very large sizes as in marine applications, whereas 4 stroke cycle engines are exclusively used in the middle power ranges.

7. What is the chemically correct air fuel ratio for SI engine fuel? Can this ratio be used at all

conditions of engine operation?

The correct air fuel ratio in the case of petroleum fuels is in the range 15-16.

In the case of SI engines a mixture is to be formed before starting combustion. As all the components of the fuel do not evaporate at the same temperature a fuel rich mixture is required at cold starting. For complete fuel utilisation or economy a lean mixture (1:16) is used when maximum power is not required. Maximum power can be produced when all the air is utilised, and hence rich mixtures in the range 12:1 are used for maximum power. Such varying mixture requirements are met very well by modern carburetors. Injection systems are now becoming more popular.

8. What are the factors which contribute to knocking in SI engines?

- a. Low self ignition temperature of the fuel and chemical bonds of the fuel controlling delay period.
- b. High compression ratio and high inlet temperature
- c. Poor shape of the combustion chamber and low turbulence.
- d. High speed of the operation.

9. Explain what is meant by delay period of fuel?

In IC engine combustion chamber during mixing, the fuel should first evaporate to form a combustible mixture. The time taken for evaporation and mixing is called physical delay. Fuel molecules are complex, Intermediate reactions are necessary before the fuel burns to form CO₂

and H₂O. The time interval between ignition and start of final reactions is called chemical delay.

Chemical delay is important in SI engines. It should be longer to prevent self ignition. In CI engines total delay should be short to prevent accumulation of fuel in the chamber before ignition.

10. How does the shape of the combustion chamber affect the knock characteristics of SI engines?

The length of flame travel should be shorter. Otherwise self ignition of the last portion of mixture is likely to occur. The volume at the last portion should be low so that even if self ignition occurs its effect will be minimal (a wedge shape is an example, see fig.) turbulence in the chamber will speed up flame travel and this is an important characteristic of the C.C.

11. What is meant by Octane rating of SI engine fuel?

Higher compression ratio provides a more efficient operation. However fuel knocking characteristics limit the compression ratio that can be used (Called HUCR - highest useful compression ratio).

Isooctane is found to have the best knock limiting characteristics and n – heptane the poorest in this regard.

The percentage ratio of Isooctane and n -heptane in a mixture which has the same knock characteristics as the given fuel is determined and the fuel is rated by the percentage of

isooctane in the test. Normal fuel octane rating is in the range 70-80. Higher octane fuels can be used at higher compression ratios without knocking, leading to higher efficiency: (Costlier)

12. What is meant by normal and abnormal combustion in SI engines?

In SI engines air fuel mixture is compressed and at the end of compression a spark is produced to ignite the fuel. A flame front from the point of ignition travels uniformly all around consuming the mixture. The pressure rise due to such compression will be smooth. "This is called normal combustion.

As the flame travels through the combustion chamber pressure and temperature of the mixture increase. Under certain conditions all the remaining mixture in the chamber will ignite (self ignition) and will cause a sudden and steep pressure rise. This is called knocking combustion and this will damage the components and also reduce efficiency. Vibration and noise will be another problem.

Pre ignition due to hot spots or glowing carbon deposits can also produce abnormal combustion.

13. Define cycle.

It is defined as a series of state changes such that the final state is identical with the initial state.

14. Define the term compression ratio.

Compression ratio is the ratio between total cylinder volume to clearance volume. It is denoted by the letter 'r'

15. What is the range of compression ratio for SI and diesel engine?

For petrol of SI engine 6 to 8

For diesel engine 12 to 18

16. Which cycle is more efficient for the same compression ratio and heat input, Otto cycle or Diesel cycle?

Otto cycle is more efficient than diesel cycle

17. Write the expression for efficiency of the otto cycle?

1

Efficiency $\eta = 1 - \frac{1}{r^{r-1}}$

(r)r-1

18. Which device is used to control the Air – fuel ratio in the petrol engine?

Carburettor

19. Which device is used to control the Air fuel ratio in the diesel engine?

Injection nozzle

20. The efficiency of the diesel cycle approaches the otto cycle efficiency when the cut off ratio is

Ans: Reduced

21. The speed of a four stroke I.C. engine is 1500rpm. What will be the speed of the cam shaft?

750 rpm.

22. All the four operations in two stroke engine are performed in _____ number of revolution of crank shaft.

Ans: One

23. All the four operations in four stroke engine are performed in _____ number of operations?

Ans: Two

24. In otto cycle the compression ratio is _____ to expansion ratio.

Ans: Equal

25. In diesel engine, the compression ratio is _____ than expansion ratio?

Ans: Greater

26. What is meant by cutoff ratio?

Cutoff ratio is defined as the ratio of volume after the heat addition to before the heat addition. It is denoted by the letter 'p'

27. What are the assumptions made for air standard cycle

- a. Air is the working substance.
- b. Throughout the cycle, air behaves as a perfect gas and obeys all the gas laws.
- c. No chemical reaction takes place in the cylinder
- d. Both expansion and compression are strictly isentropic
- e. The values of specific heats of the air remain constant throughout the cycle.

28. Define Mean effective pressure of an I.C. engine.

Mean effective pressure is defined as the constant pressure acting on the piston during the working stroke. It is also defined as the ratio of work done to the stroke volume or piston displacement volume.

29. What is the other name given to otto cycle?

Constant volume cycle.

30. What is meant by air standard efficiency of the cycle?

It is defined as the ratio of work done by the cycle to the heat supplied to the cycle.

Work done

Efficiency $\eta = \frac{\text{Work done}}{\text{Heat supplied}}$

Heat supplied

31. What will be the effect of compression ratio on efficiency of the diesel cycle?

Efficiency increases with the increase in compression ratio and vice – versa.

32. What will be the effect of cut off ratio on efficiency of the diesel cycle?

Efficiency decreases with the increase of cut off ratio and vice – versa.

33. Define: Specific fuel consumption.

SFC is defined as the amount of fuel consumed per brake power hour of work.

34. What is the difference between otto and Diesel cycle.

Otto Cycle Diesel Cycle

1. Otto cycle consist of two adiabatic and two constant volume process.

1. It consists of two adiabatic, one constant volume and one constant pressure processes.

2. Compression ratio is equal to expansion ratio

2. Compression ratio is greater than expansion ratio.

3. Heat addition takes place at constant volume.

3. Heat addition takes place at constant pressure

4. Compression ratio is less. It is varies from 6 to 8.

4. Compression ratio is more. It varies from 12 to 18.

35. The thermal efficiency of a two stroke cycle engine is _____ than the four stroke cycle engine.

Lesser

36. What is meant by calorific value of a fuel?

Calorific value of a fuel is defined as the amount of heat liberated by the complete combustion of unit quantity of a fuel.

37. The efficiency of the Dual cycle is _____ than the diesel cycle and _____ than the otto cycle for the same compression ratio.
greater, less.

38. What are the factors influencing of the Dual cycle?

- a. Compression ratio
- b. Cut off ratio
- c. Pressure ratio
- d. Heat supplied at constant volume and constant pressure.

39. The Brayton cycle is mainly used in _____
Gas turbine power plant.

40. Mention the various processes in diesel cycle and dual cycle.

Diesel cycle:

Isentropic compression and expansion, constant volume heat rejection and constant pressure heat addition.

Dual cycle:

Isentropic compression and expansion, partially heat supplied at constant volume and

remaining at constant pressure and constant volume heat rejection.

41. Give the expression for efficiency of the Dual cycle.

$1 - \frac{K p_r - 1}{(r)^{r-1} (K-1) + y K (p-1)}$

Efficiency $\eta = 1 - \frac{K p_r - 1}{(r)^{r-1} (K-1) + y K (p-1)}$

where,

r – Compression ratio

k – pressure or Expansion ratio

p – cut off ratio and

y – adiabatic index

42. Plot the P-V and T-S diagram of Otto cycle.

P T

3

2

4

adiabatic Constant volume

processes

QR

43. Give the expression for efficiency of the Brayton cycle.

Efficiency $\eta = 1 - \frac{1}{(R_p)^{y-1}}$

Where,

R_p – pressure ratio.

44. Write any four differences between Otto and Diesel cycle?

Sl.No Otto Cycle Diesel Cycle

1 Otto cycle consist of Two isentropic and two constant volume processes

Diesel cycle consist of two adiabatic, one constant volume and one constant

pressure processes

2 Heat addition takes place in constant volume process

Heat addition takes place in constant pressure process

3 Efficiency is more than diesel cycle for the same compression ratio

Efficiency is less than Otto cycle for the same compression ratio

4 Compression ratio is equal to expansion ratio

Compression ratio is greater than expansion ratio

45. The two stroke cycle engine gives _____ the number of power strokes as compared to the four stroke cycle engine, at the same engine speed.

Ans: Double

46. What are the processes involved in Dual cycle

- a. Adiabatic compression
- b. Constant volume heat addition
- c. Constant pressure heat addition
- d. Adiabatic expansion
- e. Constant volume heat rejection

47. In petrol engine, the charge is ignited with the help of _____

Ans: Spark plug

48. Define the following terms in the Air Standard cycle

- a. Air standard efficiency
- b. Specific work transfer
- c. Specific air consumption and
- d. Work ratio.

Air standard efficiency:

Air standard efficiency is defined as the ratio of network transfer during the cycle to the net heat transfer to the cycle.

Specific work transfer:

Specific work transfer is the work transfer per unit mass of working substance.

Specific air consumption:

Specific air consumption is the quantity of working substance required for doing work transfer or the flow ratio of working substance for unit power.

Work ratio:

Work ratio = Net work transfer in a cycle / possible work transfer in cycle

49. The diesel engine draws the mixture of diesel and air during suction stroke (True / False)

Ans: False

50. What is the effect of air standard efficiency of Diesel cycle with compression ratio and cut off ratio?

Efficiency increases with the increase in compression ratio and vice-versa. The efficiency decreases with the increase in cut off ratio and vice-versa.

51. Name the various gas power cycles

Carnot cycle, Otto cycle, Diesel cycle, Dual cycle, Brayton cycle, Atkinson cycle, Stirling cycle,

52. Define mean effective pressure as applied to gas power cycles.

Mean effective pressure is defined as the constant pressure acting on the piston during

the working stroke. It is also defined as the ratio of work done to the stroke volume of piston displacement volume.

54. When will the inter cooler is provided between two compressors? What are the effects of providing intercooler in gas turbine?

Ø When pressure ratio is very high, then the intercooler is provided between compressors.

Ø Due to intercooler, heat supply is increased and work ratio will be increased and the specific volume of air is also reduced.

55. When the reheater is employed in the gas turbine cycle?

When air fuel ratio is high, the combustion products after expansion in the highpressure turbine contain more oxygen. This can be utilised in the reheater and the gas is further expanded in the low-pressure turbine.

56. Define isentropic efficiency of turbine and compressor in a Joule cycle.

$\eta_{\text{turbine}} = \text{Actual internal work} / \text{Work of isentropic expansion}$

$\eta_{\text{compressor}} = \text{Work of isentropic compression} / \text{Actual internal work}$

57. Compare the Diesel and Brayton cycles

Diesel cycle Brayton cycle

1. It consist of two isentropic, one constant 1. It consist of two isentropic, one constant

volume and one constant pressure processes pressure processes

2. Heat is rejected at constant volume 2. Heat is rejected at constant pressure

3. Used in Diesel engines 3. Used in gas turbines

58. Why Brayton cycle is used in gas turbine?

Inside the turbine the gas is continuously flowing in the processes are flow processes.

Since all the processes involved in Brayton cycle is flow process, it has been used as the cycle for gas turbine.

59. What is the fuel injector?

Fuel injector is used in diesel engine to inject and atomize the diesel at the end of the compression stroke.

60. What is meant by SI engine? Why it is called so?

SI engine means spark ignition engine. In SI engine air fuel mixture is ignited by spark plug hence it is called spark ignition engine. It is also called as petrol engine.

61. Give four major differences between two stroke and four stroke IC engine.

No Two stroke cycle engine Four Stroke cycle engine

1 One cycle is completed in two stroke of the piston or one revolution of the crank shaft.

One cycle is completed in four stroke of the piston or two revolution of the crank shaft.

2 For the same speed, twice the number of power strokes is produced than 4 stroke engine.

For the same speed, half of the number of power strokes is produced than 2 stroke engine.

3 Turning moment is more uniform and hence lighter flywheel is used.

Turning moment is not uniform and

hence bigger flywheel is used.

4 It contains ports which are operated by the piston movement.

It contains valves which are operated by valve mechanism.

62. What is meant by CI Engine? Why it is called so?

CI engine means compression ignition engine. In CI engine the fuel is injected by a fuel injector in atomized form because of high compressed air it gets ignited automatically. Hence it is called as compression ignition engine.

63. What is a two stroke engine?

A two stroke engine is an engine in which one cycle of operation is completed in two stroke of the piston or one revolution of the crank shaft.

64. What is a four stroke engine?

A four stroke engine is an engine in which one cycle of operation is completed in four stroke of the piston or two revolution of the crank shaft.

65. Name the four strokes of an IC engine?

Suction, compression, power and exhaust stroke

66. What is a Gas turbine? How do you classify.

Gas turbine is an axial flow rotary turbine in which working medium is gas.

Classification of gas turbine

1. According to the cycle of operation

- a. Open cycle
- b. Closed cycle and
- c. Semi – closed cycle.

2. According to the process

- a. Constant volume and

b. Constant pressure process.

67. Differentiate petrol and Diesel engines.

Petrol or SI engines Diesel or CI engine

1. Combustion of air fuel mixture takes place by spark produced by sparkplug.

1. Combustion takes place by high compressed air.

2. Carburetor is used to mix the air fuel 2. Fuel injector is used to inject the fuel in mixture. atomized form.

3. Compression ratio varies from 6 to 8. 3. Compression ratio varies from 12 to 18.

4. It works on Otto cycle. 4. It works on Diesel or Dual cycle.

68. What is meant by closed cycle gas turbine?

In closed cycle gas turbine, the same working fluid is recirculated again and again.

69. What is meant by open cycle gas turbine?

In open cycle gas turbine, the exhaust gas from turbine is exhausted to the atmosphere and fresh air is taken in compressor for every cycle.

70. Gas turbine is working on ----- cycle

Brayton or Jules cycle.

71. How can we increase the efficiency of the gas turbine?

By providing inter cooler, re-heater along with heat exchanges.

72. What is the function of intercooler in gas turbines?

Where it is placed?

The intercooler is placed between L.P. and H.P. compressors. It is used to cool the gas coming from L.P. compressor to its original temperature.

73. What is meant by single acting compressor?

In single acting compressor, the suction, compression and delivery of air take place on one side of the piston.

74. Differentiate open and closed cycle gas turbines.

Open cycle gas turbine Closed cycle gas turbine

- | | |
|---|--|
| 1. Working substance is exhausted to the atmosphere after one cycle. | |
| 1. The same working substance is recirculated again and again. | |
| 2. Pre-cooler is not required | 2. Pre-cooler is required to cool the exhaust gas to the original temperature. |
| 3. High quality fuels are used | 3. Low quality fuels are used |
| 4. For the same power developed size and weight of the plant is small | |
| 4. Size and weight are bigger. | |

75. Why re-heater is necessary in gas turbine? What are its effects?

The expansion process is very often performed in two separate turbine stages. The re-heater is placed between the H.P. and L.P. turbines to increase the enthalpy of the exhaust gas coming from H.P. turbine.

Effects:

- Ø Turbine output is increased for the same compression ratio
- Ø Thermal efficiency is less.

76. What is the function of regenerator in gas turbine?

The main function of heat regenerator is to exchange the heat from exhaust gas to the compressed air for preheating before combustion chamber. It increases fuel economy and

increase thermal efficiency.

77. What are the assumptions made on air standard efficiency?

Ø Air is the working fluid and it obeys the perfect gas laws.

Ø The engine operates in a closed cycle. The cylinder is filled with constant amount of working substance and the same fluid is used repeatedly and hence mass remains constant.

Ø The working fluid is homogeneous throughout at all times and no chemical reaction takes place, inside the cylinder.

Ø The compression and expansion processes are assumed to be adiabatic.

Ø The values of specific heat (C_p and C_v) of the working fluid remains constant.

Ø All processes are internally reversible and no mechanical or frictional losses to occur throughout the process.

Ø Combustion is replaced by heat addition process and exhaust is replaced by heat rejection process.

Ø

78. Define compression ratio.

It is defined as the ratio of the volume of cylinder to the clearance volume.

79. Define mean effective pressure.

It is defined as the average pressure acting on the piston during the entire power stroke that would produce the same amount of net work output during the actual cycle. It is also

defined as the ratio of work-done per cycle to swept volume.

80. Define Clearance Volume.

It is the minimum volume occupied by the fluid in the cylinder when the piston reaches the top dead centre position.

81. What are the conditions for maximum work of an Otto cycle?

$$T_2 = T_4 = \sqrt{(T_1 T_3)}$$

$$r_k = (T_3/T_1)^{1/2(\gamma-1)}$$

82. Define work ratio of gas turbine.

It is the ratio of network to turbine work.

UNIT II – IC ENGINE

83. What is the function of push rod and rocker arm in IC engine?

The function of push rod and rocker arm in IC engine is to transmit motion of the cam to the valve.

84. What is scavenging in IC engine?

The process of pushing out of exhaust gases from the cylinder by admitting the fresh charge into the cylinder is known as scavenging.

85. What is the function of idling jet in a carburetor?

The function of idling jet in a carburetor is to supply a mixture at an air fuel ratio of 10:1 for low speed operation.

86. What are the requirements of a fuel injection system of a diesel engine?

Ø To inject the fuel at correct moment, and quantity at various load conditions

Ø To inject the fuel in a finely atomized condition.

- Ø To distribute the fuel uniformly in the combustion chamber.
- Ø To control the rate of fuel injection.

87. What is the purpose of a thermostat in an engine cooling system?

The purpose of thermostat in cooling system is to control the water flow. It allows the water circulation only, when the temperature of the radiator is about 75°C.

88. List the advantages of electronic ignition system over the conventional system.

- Ø Less weight.
- Ø Compact
- Ø Spark timing can be accurately controlled.
- Ø Wiring is simple

89. What is meant by ignition lag?

It is the time interval between the instant of spark and the instant when there is a noticeable rise in pressure due to combustion.

90. Differentiate between brake power and indicated power of an IC engine.

Brake Power: It is defined as the power developed at output crank shaft of an engine for doing external work.

Indicated Power: It is the power developed by the engine inside the cylinder due to the fuel combustion in the combustion chamber.

91. What is Morse test?

Morse test is a performance test conducted on multi cylinder engines to measure the indicated power without the use of indicator diagram.

92. Which engine will have more cooling requirement two-stroke engine or four-stroke engine?

Why?

Two stroke-engines will have more cooling requirements since power is developed for each revolution of crank. So, for each crank revolution, Combustion occurs and more heat will be generated inside the cylinder.

93. What is the function of the carburetor?

- Ø To atomize the fuel and mix it homogeneously with the air.
- Ø To run the engine smoothly without hunting of fuel wastage.
- Ø To provide rich mixture during starting and idling and also for quick acceleration.
- Ø To provide a constant air fuel ratio at various loads.
- Ø To start the engine even in cold weather conditions.

94. List the requirements of ignition system.

- Ø Ignition should takes place at the end of compression stroke.
- Ø There should be no missing cycle due to the spark failure.
- Ø Ignition must add sufficient energy for starting and sustaining the charge burning
- Ø Ignition system should supply the minimum required energy within a small volume in a very short time.

95. What are the different types of ignition system in S.I. engines?

Battery Ignition system and Magneto ignition system.

96. What are the advantages of Battery ignition system?

- Ø The initial cost is low (except battery).
- Ø It provides better spark at low speed of engine during starting and idling.
- Ø Maintenance cost is negligible. (expect for battery)

Ø The spark efficiency remains unaffected by advance and retard positions.

Ø The simplicity of the distributor drive.

97. What are the disadvantages of Battery ignition system?

Ø The engine cannot be started if the battery is weak.

Ø The weight of the battery is greater than the magneto.

Ø The wiring involved in the coil ignition is more complicated than magneto.

Ø The sparking voltage drops with increasing speed of the engine.

98. What is the necessity of cooling in IC engine?

Ø To avoid un even expansion of the piston in the cylinder.

Ø To reduce the temperature of piston and cylinder.

Ø To avoid the overheating of the cylinder.

Ø To avoid the physical and chemical changes in the lubricating oil this may cause sticking of piston rings.

99. What is flash point?

Flash point is the lowest temperature at which the given oil gives sufficient vapour to give a moment of flash, when a flame is passed across the surface.

100. What are the different types of cooling in IC engines?

Ø Air cooling

Ø Water cooling system

Ø Thermosyphon cooling

Ø Forced circulation cooling

Ø Thermostatic regulator cooling

Ø Evaporative cooling

101. What are the purpose of lubrication in IC engines?

Ø To reduce the friction and wear between the parts having the relative motion.

Ø To cool the surfaces by carrying away heat generated due to friction.

Ø To seal between two moving parts.

Ø To clean the surface by carrying away the carbon particles caused by wear.

Ø To absorb the shock between bearings and other parts and consequently reduce noise.

102. What is petroil system of lubrication?

A special type of lubrication system used in two stroke engines in which lubricant (up to 60%) is thoroughly mixed with fuel and supplied to the engine. It is also known as mist lubrication.

103. What is auto ignition?

A mixture of fuel and air can react spontaneously and produce heat by chemical reaction without the uses of flame to initiate the combustion, because the temperature is high than self-ignition temperature.

104. What is meant by pre-ignition?

At very high temperature carbon deposits formed inside the combustion chamber ignites the air fuel mixture much before normal ignition occurred by spark plug. This is called pre-ignition.

105. What are the factors affecting ignition lag?

Compression ratio, speed of the engine, Chemical nature of fuel and air fuel ration, and Initial pressure and temperature.

106. What is meant by knocking? How it occurs in diesel engines?

If the delay period of C.I. engines is long, more fuel is injected and accumulated in the chamber. When ignition begins, pulsating pressure rise can be noticed and creates heavy noise.

This is known as knocking.

107. What are the effects of knocking?

Ø The engine parts get overheated which may cause damage to the piston.

Ø It creates heavy vibration of engine and hence louder noise and roughness.

Ø Decrease in power output and efficiency.

Ø More heat is lost to the coolant as the dissipation rate is rapid.

Ø The auto-ignition may over heat the spark plug and hence pre-ignition occurs

Ø Carbon deposits.

108. Define specific fuel consumption?

It is the ratio of fuel consumption per unit time of power developed.

109. Explain an experimental method to determine the frictional power of an IC engine.

Retardation test can be carried out to determine the frictional power of an diesel engine. In this method, the engine is started and made to run at full load conditions at rated speed. After sometimes, the fuel supply is cutoff and the necessary readings are noted. Repeat the above procedure for 50% load and calculated the frictional power of an engine using formulas.

110. What is the purpose of heat balance sheet in IC engine?

Ø It is the accounts of heat supplied and heat utilized in various ways in the system.

Ø The heat balance is generally done by minute basis or percentage basis.

111. What is steam nozzle? How are they classified?

A steam nozzle is a device having variable cross-sectional passage in which the potential energy of steam is converted into kinetic energy at low pressure when a high pressure steam flows through it. They are classified as convergent type, divergent type, and convergentdivergent type.

112. What is the use of helical groove in a fuel injection pump used for CI engine?

Ø To control the delivery stroke effectively.

Ø To control the amount of fuel supplied to the engine.

113. Explain the location of sparkplug with respect to knocking in SI engines.

In order to reduce the knocking tendency, spark travel distance should be kept as minimum as possible. Similarly, the distance of the end charge from the spark plug also should be minimum.

114. Define critical pressure ratio.

The pressure which the area is minimum and discharge per unit area is maximum is called critical pressure ratio.

Critical pressure ration = $(p_2/p_1) = (2/(n+1))^{n/(n-1)}$

115. What is the significance of critical pressure ratio?

Ø The critical pressure gives the velocity of sound.

Ø The flow in the convergent portion of the nozzle is subsonic and divergent portion is supersonic

Ø For expanding the steam below critical pressure, the divergent portion of the nozzle is necessary.

Ø When p_2 approaches the critical value the rate of discharge will be maximum.

UNIT III STEAM NOZZLE AND TURBINE

1. What is the effect of friction in nozzle?

- Ø It reduces the value of enthalpy drop.
- Ø The expansion will not be isentropic.
- Ø It increases the entropy. _____
- Ø The exit velocity will change as $C_2 = \sqrt{(2000(h_1 - h_2)\eta_n)}$ If 10% frictional loss $\eta_{\text{nozzle}} = 90\%$.
- Ø Friction increases the quality of steam.
- Ø Final dryness fraction of steam is increased as the kinetic energy of steam gets converted into heat due to friction and is absorbed by steam.

15. Compare Carnot and Rankine cycles

Carnot cycle Rankine cycle

- | | |
|--|--|
| 1. Lower work ratio | 1. Higher work ratio |
| 2. Specific steam consumption is more | 2. Specific steam consumption is less |
| 3. Size of the power plant for a given output is big | 3. Size of the power plant for a given output is small |
| 4. Higher thermal efficiency | 4. Lower thermal efficiency |
- compression of a very wet vapour is very difficult.

32. Explain the term critical point, critical temperature and critical pressure.

In the T-S diagram the region left of the waterline, the water exists as liquid. In right of the dry steam line, the water exists as a super heated steam. In between water and dry steam line the water exists as a wet steam. At a particular point, the water is directly converted into

dry steam without formation of wet steam. The point is called critical point. The critical temperature is the temperature above which a substance cannot exist as a liquid; the critical temperature of water is 374.150 C. The corresponding pressure is called critical pressure.

33. Define dryness fraction (or) What is the quality of steam?

It is defined as the ratio of mass of the dry steam to the mass of the total steam.

34. Define enthalpy of steam.

It is the sum of heat added to water from freezing point to saturation temperature and the heat absorbed during evaporation.

35. How do you determine the state of steam?

If $V > v_g$ then super heated steam, $V = v_g$ then dry steam and $V < v_g$ then wet steam.

36. Define triple point.

The triple point is merely the point of intersection of sublimation and vapourisation curves.

37. Define heat of vapourisation.

The amount of heat required to convert the liquid water completely into vapour under this condition is called the heat of vapourisation.

38. Explain the terms, Degree of super heat, degree of sub-cooling.

The difference between the temperature of the superheated vapour and the saturation temperature at the same pressure. The temperature between the saturation temperature and

the temperature in the sub cooled region of liquid.

39. What is the purpose of reheating?

The purpose of reheating is to increase the dryness fraction of the steam passing out of the later stages of the turbine.

40. Define Ideal gas.

It is defined as a gas having no forces of intermolecular attraction. These gases will follow the gas laws at all ranges of pressures and temperatures.

41. Define Real gas.

It is defined, as a gas having the forces of attraction between molecules tends to be very small at reduced pressures and elevated temperatures.

42. What is equation of state?

The relation between the independent properties such as pressure, specific volume and temperature for a pure substance is known as the equation of state.

43. State Boyle's law.

It states that volume of a given mass of a perfect gas varies inversely as the absolute pressure when temperature is constant.

44. State Charle's law.

It states that if any gas is heated at constant pressure, its volume changes directly as its absolute temperature.

45. Explain the construction and give the use of generalized compressibility chart.

The general compressibility chart is plotted with Z versus P_r for various values of T_r .

This is constructed by plotting the known data of one of mole gases and can be used for any gas.

This chart gives best results for the regions well removed from the critical state for all gases.

46. What do you mean by reduced properties?

The ratios of pressure, temperature and specific volume of a real gas to the

corresponding critical values are called the reduced properties.

47. Explain law of corresponding states.

If any two gases have equal values of reduced pressure and reduced temperature, then

they have same values of reduced volume.

48. Explain Dalton's law of partial pressure.

The pressure of a mixture of gases is equal to the sum of the partial pressures of the

constituents. The partial pressure of each constituent is that pressure which the gas would

expect if it occupied alone that volume occupied by the mixtures at the same temperatures.

$$m = m_A + m_B + m_C + \dots = \sum m_i$$

m_i = mass of the constituent.

$$P = P_A + P_B + P_C + \dots = \sum P_i$$

P_i - the partial pressure of a constituent.

49. State Avogadro's Law.

The number of moles of any gas is proportional to the volume of gas at a given pressure

and temperature.

50. What is Joule-Thomson coefficient?

The temperature behaviors of a fluid during a throttling

(h =constant) process is

described by the Joule-Thomson coefficient defined as

$$\mu = [dT/dP]_n$$

51. What is compressibility factor?

The gas equation for an ideal gas is given by $(PV/RT) = 1$, for real gas (PV/RT) is not equal to 1 $(PV/RT) = Z$ for real gas is called the compressibility factor.

52. What is partial pressure?

The partial pressure of each constituent is that pressure which the gas would exert if it occupied alone that volume occupied by the mixtures at the same temperature.

53. Define Dalton's law of partial pressure.

The total pressure exerted in a closed vessel containing a number of gases is equal to the sum of the pressures of each gas and the volume of each gas equal to the volume of the vessel.

54. How does the Vander Waal's equation differ from the ideal gas equation of state?

The ideal gas equation $pV=mRT$ has two important assumptions,

- There is little or no attraction between the molecules of the gas.
- That the volume occupied by the molecules themselves is negligibly small compared to the volume of the gas. This equation holds good for low pressure and high temperature ranges as the intermolecular attraction and the volume of the molecules are not of much significance.

As the pressure increases, the inter molecular forces of attraction and repulsion

increases and the volume of the molecules are not negligible.

The real gas deviates considerably

from the ideal gas equation $[p + (a/V^2)](V - b) = RT$

55. What is meant by super saturation in steam nozzles?

Owing to the high velocity, the residence time of steam in the steam nozzle is small, and

there may not be sufficient time for necessary heat transfer and the formation of liquid droplet.

Consequently the condensation of the steam may be delayed for a little while. This

phenomenon is known as super saturation.

56. Define stagnation enthalpy

The stagnation enthalpy represents the enthalpy of fluid when it is brought rest

adiabatically.

57. What are the different forms of steam nozzles?

a. Convergent nozzles

b. Divergent nozzles

c. Convergent divergent nozzles

58. Define coefficient of nozzle or nozzle efficiency

Nozzle efficiency = (actual enthalpy drop) / (isentropic enthalpy drop)

59. What is the effect of friction on the flow through a steam nozzle?

a. The expansion will not be isentropic and enthalpy drop is reduced

b. The dryness fraction of the steam is increased

c. The specific volume of steam is increased

60. What are the differences between super saturated flow and isentropic flow in steam nozzles

Super saturated Flow Isentropic Flow

1. Entropy is not constant Entropy is constant
2. Reduction in enthalpy drop No reduction in enthalpy drop
3. Mollier diagram could not be used to Mollier diagram can be used to solve the problem

61. What are the reasons for the drop in velocity of the steam for a given pressure drop in steam nozzle?

- a. Friction between the surface of the nozzle and steam
- b. Due to internal fluid friction in the steam
- c. Due to shock losses

62. What are the effects of super saturation in nozzles?

- Ø The dryness fraction of the steam is increased
- Ø Entropy and specific volume of the steam are increased
- Ø Exit velocity of the steam is reduced
- Ø Mass of the steam discharged is increased.

63. What are the limits for super saturation in steam nozzles? Why?

The super saturation occurs upto above 0.94 dryness fraction and beyond that the condensation of steam occurs suddenly and irreversibly at constant enthalpy and then remain in stable condition.

64. What are the main functions of steam nozzles?

- Ø To supply high velocity jet of steam in steam turbine
- Ø To inject feed water in to the boiler in a steam injector.

65. Define indicated pressure ration in steam nozzles

There is only one value of the ratio (P_2/P_1), which produces maximum discharge from the nozzle. That ratio is called Critical Pressure Ratio.

66. What are the factors those change the fluid properties while a fluid flows through a nozzle with no work or heat transfer?

Ø Change in flow area

Ø Frictional forces

67. Explain super saturated flow (or) metastable flow in steam nozzle.

When super heated steam is expanded isentropically, it starts condensing at its meet with dry saturated line. But in nozzles, the velocity of steam is high and hence the time available is very less (about 0.001 sec). So, the condensation phenomenon does not start at point '2' for a flow of point 1 to point 5. As a result of this, the steam continues to expand in dry condition up to point 3. The steam between state 2 and 3 is said to be supersaturated or metastable state and the flow of such super saturated steam is known as supersaturated or metastable flow. A limit to the super heated state was observed by Wilson and a line drawn on the chart through the observed points is known as Wilson line. This line becomes the saturation line for all practical purposes. Beyond this Wilson line, the steam suddenly starts to condense and restores its normal equilibrium state.

68. What are the effects of super saturation?

Ø The super saturation increases the specific volume and entropy of the steam.

Ø Super saturation reduces the heat drop. Thus exit velocity of the steam is reduced.

Ø Super saturation increases the dryness fraction of the steam.
Ø The temperature at which super saturation occurs will be less than the saturation temperature corresponding to the pressure. Therefore the density of the super saturated steam will be more than for the equilibrium condition, which gives the increase in mass of steam discharged.

69. Define nozzle efficiency.

It is the ratio of actual enthalpy drop to isentropic enthalpy drop.

70. Differentiate super saturated flow and isentropic flow.

Super saturated flow Isentropic flow

Entropy is not constant Entropy remains constant

Super saturation reduces the heat drop

therefore exit velocity is reduced

No reduction in enthalpy drop.

Moiller diagrams cannot be used Moiller diagrams can be used.

$$C_2 = \sqrt{\left(\frac{2n}{n-1}\right) p_1 v_1 \left(1 - \left(\frac{p_1}{p_2}\right)^{\frac{n-1}{n}}\right)}$$

$$C_2 = \sqrt{(2000 (h_1 - h_2))} + C_1$$

71. Mention the applications of nozzle.

Ø To inject feed water into the boiler in steam injectors.

Ø To maintain, high vacuum in power plant condensers.

Ø To supply, high velocity jet of steam jet in steam turbines.

Ø To remove, air in condenser.

72. What are the advantages of convergent divergent nozzle?

Ø The steam enters the nozzle at high pressure with negligible velocity and leaves at high velocity with low pressure.

Ø Convergent-divergent nozzles are used in back pressure turbine.

73. What is the purpose of divergent portion after the throat section of nozzle?

Ø It accelerates the steam leaving the nozzle.

Ø It does not affect the discharge of steam passing through the nozzle.

74. Define degree of super saturation.

The ratio of super saturation pressures corresponding to the temperature between

super saturated region is known as the degree of super saturation.

75. Define blade efficiency or utilization factor.

It is the ratio of rotor blade work to energy supplied to the rotor.

76. Define degree of reaction.

It is defined as the ratio of the actual isentropic heat drop to the total heat drop in the entire stage.

77. What is compounding and explain the purpose of compounding?

Compounding is the method in which multiple system or rotors are keyed to common shaft in series and the steam pressure or jet velocity is absorbed in stages as it flows over the rotor blades.

Purpose of compounding: Reduction of pressure (from boiler pressure to condenser pressure)

in single results in the very high velocity entering the turbine blades. Therefore, the turbine rotor

will run at a high speed about 30,000 rpm which is not useful for practical purpose. In order to

reduce the rotor speed up to about 400 m/sec, compounding of steam turbine is necessary.

78. What are the types of compounding in steam turbines?

Velocity compounding, Pressure compounding and Pressure velocity compounding.

79. What are the advantages and disadvantages of velocity compounded turbines?

Advantages:

- Ø The cost of turbine is less because less number of stages.
- Ø It occupies less area.
- Ø The system is reliable and easy to operate.
- Ø Turbine casing is very simple and need not be very strong.

Disadvantages:

- Ø The friction losses are large due to very high steam velocity in the nozzle.
- Ø Low efficiency because blade speed ratio is less than the optimum value.
- Ø The power developed in the later rows is only a fraction of power developed in the first row.

80. What is governing of steam turbine and state the various methods of governing?

Governing is the method of maintaining the constant speed of the turbine irrespective of load variation by varying the flow rate. The various methods of governing in steam turbines are

Throttle governing, Nozzle control governing, By pass governing, Combinations of throttle and nozzle governing and Combinations of throttle and by pass governing.

81. What is the fundamental difference between the operation of impulse and reaction steam turbines?

Ø In impulse turbine, the steam completely expands in the nozzle and its pressure remains constant during its flow through the rotor blades.

Ø In reaction turbine, the steam expands partially in the nozzle and remaining in rotor blades.

82. Differentiate Impulse and Reaction Turbine.

Sl. No. Impulse Turbine Reaction Turbine

1. An impulse turbine works due to change in kinetic energy of the fluid flowing through the rotor when the pressure remains constant.

Reaction turbine is one in which the decreases gradually & Kinetic energy is increased, when the steam flows over a set of fixed and moving blades

2. Less number of stages are required for same output power.

More number of stages are required for same output power.

3. It is suitable for small power requirements It is suitable for medium and high power requirements.

4. Blade passage is of constant cross sectional area.

Blade passage is of converging type.

5. Blades shapes are profile type. Blade shapes are aerofoil type.

6. Steam is admitted over the part of the

circumference of the wheel.

Steam is admitted over the entire circumference of the wheel.

7. Blade manufacture is easy Blade manufacture is difficult.

8. Steam fully expands in nozzle. Steam expands in both nozzle and moving blades.

9. Flow can be regulated without loss Flow cannot be regulated without loss

83. Differentiate between nozzle governing and throttle governing.

Sl. No. Throttle governing Nozzle governing

1. More throttling losses occur. Throttling losses are negligible

2. Partial admission losses are low Partial admission losses are high

3. Less heat drop is available for work More heat drop is available for work

4. Employed for both impulse and reaction turbines

Employed only in impulse turbines

5. Less efficient method More efficient method

6. Suitable for small turbines Suitable for medium and large turbines

84. Define the term stage efficiency in case of reaction turbines.

It is the ratio of work done on blades per kg of steam to the enthalpy drop in the nozzle.

85. What is meant by FAD?

Free air delivered means the actual volume of air delivered by the compressor under normal temperature and pressure condition.

86. Define Isothermal efficiency.

It is the ratio of isothermal power to Indicated or actual power.
at temperature of air vapour mixture.

UNIT IV AIR COMPRESSORS

1. What is meant by double acting compressor?

In double acting reciprocating compressor, the suction compression and delivery of air take place on both side of the piston.

2. What is meant by single stage compressor?

In single stage compressor, the compression of air from the initial pressure to the final pressure is carried out in one cylinder only.

3. Define clearance ratio

Clearance ratio is defined as the ratio of clearance volume to swept volume (or) stroke volume.

V_c – clearance volume

$C = \frac{V_c}{V_s}$ – swept volume V_s

4. What is compression ratio?

Compression ratio is defined as the ratio between total volume and clearance volume.

Compression ratio = $\frac{\text{Total Volume}}{\text{Clearance Volume}}$

5. What are the factors that effect the volumetric efficiency of a reciprocating compressor?

- a. Clearance volume
- b. Compression ratio.

6. Compressor Capacity is

- a. Volume of air delivered
- b. Volume of air sucked
- c. Both a and b
- d. None of the above

Ans: (a)

7. Compressor capacity is highest, when the intake air temperature is _____

Lowest

8. Compressor capacity is expressed in _____
m³/min

9. As the compression ratio increases, the volumetric efficiency of air compressor _____

Decreases

10. A 50 m³/min compressor can

- a. Compress 50m³/min of free air
- b. Compress 50m³/min of standard air
- c. Deliver 50m³/min of standard air
- d. Deliver 50m³/min of free air.

Ans: a)

11. For delivering large amount of air at low pressure

- a. Rotary compressors are used
- b. Reciprocating compressors are used
- c. All engines are used
- d. All the above

Ans: (a)

12. In gas turbine, type of rotary compressor used is

Axial flow compressor

13. In Aero plane, type of rotary compressor used is

Axial flow compressor.

14. What is the difference between complete (or) perfect inter cooling and incomplete (or) imperfect inter cooling.

Perfect Inter cooling:

When the temperature of air leaving the intercooler (T_3) is equal to the original atmospheric air temperature (T_1), then this inter cooling is known as perfect inter cooling.

Imperfect Inter cooling:

When the temperature of air leaving the inter cooler (T_3) is more than original atmospheric air temperature (T_1), then this inter cooling is known as Imperfect inter cooling.

15. What is meant by single stage double acting reciprocating compressor?

In double acting air compressor, air is admitted alternatively to both sides of the piston. When one side is performing the suction stroke, the other side will be performing compression & delivery of compressed air. Theoretically a double acting compressor will deliver twice the amount of compressed air compared to a single acting compressor of the same size and speed.

16. Define volumetric efficiency and clearance ratio

Volumetric efficiency:

Volumetric efficiency is defined as the ratio of volume of free air sucked into the compressor per cycle to the stroke volume of the cylinder.

Clearance ratio:

Clearance ratio is defined as the ration of clearance volume of swept volume (or) stroke volume.

17. What are the drawbacks in single stage compression?

The size of the cylinder will be too large. Due to compression, there will be a rise in temperature of air and it will be difficult to

reject the heat in the little time available during compression. Some time the high temperature at the end of compression may heat the cylinder head or burn the lubricating oil.

18. Explain the flow of air controlled in reciprocating compressors

The flow of air is controlled by three methods such as

- a. Centrifugal governor mechanisms
- b. Maintaining the speed of motor constant
- c. Providing air pocket advancement to the cylinder.

19. Define mean effective pressure. How is it related to indicated power?

The mean effective pressure is defined as hypothetical pressure, which is considered to be acting on the piston throughout the compression stroke.

The indicated power $IP = \text{Mean effective pressure} \times L \times A \times N$

20. What is inter-cooler? What does complete inter-cooling mean?

An inter-cooler is a simple heat exchanger. It exchanges the heat of compressed air from the low-pressure compressor to the circulating water before the air enters to the high-pressure compressor. The purpose of inter cooling is to minimize the work of compression. If the air is cooled to temperature equal to the temperature of air at the inlet of the 1st stage cylinder, the inter-cooling is complete.

21. Define Stroke volume and cylinder volume

When a piston traverses one stroke and reaches BDC of TDC, the volume swept by the piston is called stroke volume of swept volume. The addition of stroke volume and clearance volume is called cylinder volume.

22. Define positive displacement rotary compressor and dynamic displacement compressor.

In positive displacement rotary type compressor the air is entrapped in between two sets of engaging surfaces. The pressure rise is either by back flow of air or both by variation in the volume and back flow.

In the dynamic type rotary compressors, the air is not trapped in specific boundaries but it flows continuously and steadily through the machine. The energy from the impeller is transferred to the air as the air flows through the machine and the pressure rise is primarily due to dynamic effects.

23. Name any six use of compressed air

- a. Drive pneumatic tools such as rock drills
- b. Produce air for cleaning purpose in large industries
- c. Operate brakes in heavy vehicles
- d. To start large diesel engines
- e. Spray painting
- f. Refrigeration and Air-conditioning
- g.

24. What are the factors that affect the volumetric efficiency?

- a. Clearance volume
- b. Pressure ratio
- c. Temperature
- d. Stroke volume
- e. Wire drawing effect
- f. Valve fluttering

25. Define Thermodynamic cycle and Air standard cycle

Thermodynamic cycle is defined as the series of processes performed on the system, so that the system attains its original state. If we use air as working substance in the thermodynamic cycles, it is called air standard cycles.

26. Name the various gas power cycles

Carnot cycle, Otto cycle, Diesel cycle, Brayton cycle, Dual combustion cycle, Atkinson cycle, Stirling cycle.

27. What are the assumptions made for air standard cycle analysis?

Ø The working medium is perfect gas throughout i.e. it follows $PV=mRT$

Ø The working medium has constant specific heats

Ø The working medium does not undergo any chemical change throughout the cycle

Ø The compression and expansion processes are reversible adiabatic i.e. there is no loss or gain in entropy.

Ø Kinetic and potential energies of the working fluid are neglected

Ø The operation of the engine is frictionless

Ø Heat is supplied and rejected in a reversible manner.

28. What are the factors that influence the power input to the compressor?

a. The mass flow of air

b. The pressure ratio of the compressor

c. The inlet temperature

d. Temperature difference between the inlet and outlet

e. The properties of the working medium

29. What are the internal and external losses in centrifugal compressor?

The internal losses are due to a. friction between air and wall of flow passage

b. Disc friction

c. leakage between impeller and casing

d. turbulence

e. shock and the external losses are mainly due to the bearing friction

30. Define Isothermal efficiency and Roots efficiency

Isothermal efficiency is defined as the ratio of Isothermal work to indicated work. Roots efficiency is the ratio of adiabatic work to roots work.

31. What are the factors that affect the power requirement of a compressor?

- a. The total pressure ratio of the compressor
- b. The total inlet temperature
- c. The total temperature difference between the inlet and outlet
- d. The clearance volume
- e. The mass flow rate of air

32. What are the difference between rotary air compressor and reciprocating air compressor?

Reciprocating Air compressor Rotary Air compressor

The maximum delivery pressure may be as high as 1000 bar.

The maximum delivery pressure is 10 bar only. They are suitable for low discharge of air at very high pressure

They are suitable for large discharge of air at low pressure.

The speed of air compressor is low The speed of air compressor is high. The air supply is intermittent The air supply is continuous. The size of the compressor is large for the given discharge The size of air compressor is small for the same discharge. The balancing is a major problem There is no balancing problem

33. Why Clearance volume is necessary and explain its importance?

In actual compressor, the clearance volume is provided to give cushioning effect otherwise the piston will strike the other end of the cylinder. It is generally expressed as percentage of piston displacement.

Importance of clearance volume:

- Ø To give cushioning effect to the piston
- Ø To provide space for valve movement.
- Ø The maximum pressure may also be controlled by clearance volume.
- Ø The volumetric efficiency and pressure ratio are depends upon clearance volume. If clearance volume is more, it reduces the volumetric efficiency.

34. What are the advantages of multi stage compressor over single stage compressor?

- Ø Less work is done by the compressor to deliver the same quantity of air.
- Ø It improves the volumetric efficiency for the given pressure ratio.
- Ø The size of the two cylinder may be adjusted to suit the volume and pressure of the air.
- Ø It reduces the leakage losses considerably and provides effective lubrication.
- Ø It provides more uniform torque and thus smaller size of the flywheel is required.
- Ø It reduces the cost by selecting a cheap material for construction.

35. Define volumetric efficiency of the compressor.

It is the ratio of actual volume of air drawn in the compressor to the stroke volume of the compressor.

36. Define mechanical efficiency.

It is the ratio of indicated power to shaft power or brake power of motor.

37. Define Isentropic efficiency.

It is the ratio of the isentropic power to the brake power required to drive the compressor.

38. What is the purpose of inter cooling and explain its process?

The purpose of inter cooling in multistage compression is to reduce the temperature without reduction in pressure. It is placed between LP cylinder and HP cylinder. When air flows through it, the temperature is reduced by maintaining the water circulation.

39. How the compressors are classified?

According to the number of stages:

Single stage and Multi stage

According to the number of cylinder:

Single cylinder and Multi cylinder.

According to the method of cooling:

Air cooled compressor and Water cooled compressor

According to working:

Reciprocating compressor and Rotary compressor

According to the action of air:

Single acting compressor and Double acting compressor

According to the pressure limit:

Low pressure, Medium pressure and High pressure compressor.

According to the capacity:

Low capacity, Medium capacity and High capacity compressor.

40. What are the advantages of rotary compressor over reciprocating compressor?

Ø Maximum free air delivery is as high as 3000 m³/min.

Ø Air supply is continuous, more clean.

Ø Small size is required for the same discharge.

Ø No balancing problem.

41. What is the difference between centrifugal and axial flow compressors?

Centrifugal compressor Axial flow compressor

The flow of air is perpendicular to the axis of compressor
The flow of air is parallel to the axis of compressor It has low manufacturing and running cost It has high manufacturing and running cost
It requires low starting torque It requires high starting torque
It is not suitable for multi staging It is suitable for multi staging.
It requires large frontal area for a given rate of flow
It requires less frontal area for a given rate of flow. It makes the compressor suitable for aircrafts.

UNIT V REFRIGERATION AND AIR CONDITIONING

1. Power requirement of a refrigerator is _____

Ans: Inversely proportional to cop

2. In SI Units, one ton of refrigeration is equal to _____

Ans: 210KJ/min

3. The capacity of a domestic refrigerator is in the range of _____

Ans: 0.1 to 0.3 tonnes.

4. COP of a refrigerator working on a reversed carnot code is _____

T_2

Ans: -----

$T_1 - T_2$

5. The vapour compression refrigerator employs the _____ cycle

Ans: Reversed Carnot

6. In vapour compression cycle the condition of refrigerant is dry saturated vapour _____

Ans: Before entering the compressor

7. Give the 4 important parameters that are to be measured and controlled of an air conditioning system.

- a. Temperature of air
- b. Humidity of air
- c. Purity of air
- d. Motion of air

8. Name the cycles on which an Air refrigeration system works.

- a. Reversed carnot cycle
- b. Bell – coleman cycle

9. What is humidification and dehumidification?

The addition of water vapour into air is humidification and the removal of water vapour from air is dehumidification.

10. Name four important properties of a good refrigerant

- a. Low boiling point
- b. High critical temperature & pressure
- c. Low sp.heat of liquid
- d. Non – flammable and non explosive.

11. Name some of the equipments used in air conditioning system

- a. Filter
- b. Cooling coil
- c. Heating coil
- d. Compressor
- e. Condenser
- f. Evaporator

12. Name any four commonly used refrigerants

- a. Ammonia (NH_3)
- b. Carbon di oxide (CO_2)

c. Sulphur di oxide (SO_2)

d. Freon – 12.

13. What are the factors to be considered in air conditioning a room?

a. Temperature of air

b. Humidity of air

c. Purity of air

d. Motion of air.

14. The door of a running refrigerator inside a room was left open. What will happen?

The room will be gradually warmed up.

15. Differentiate absolute humidity and relative humidity.

Absolute humidity is the mass of water vapour present in one kg of dry air. Relative

humidity is the ratio of the actual mass of water vapour present in one kg of dry air at the given

temperature to the maximum mass of water vapour it can with hold at the same temperature.

Absolute humidity is expressed in terms of kg/kg of dry air.

Relative humidity is expressed in terms of percentage.

16. What is effective temperature?

The effective temperature is a measure of feeling warmth or cold to the human body in

response to the air temperature, moisture content and air motion.

If the air at different DBT

and RH condition carries the same amount of heat as the heat carried by the air at temperature

T and 100% RH, then the temperature T is known as effective temperature.

17. What is binary vapour cycle? What are the advantages of that cycle over other cycles?

Binary vapour cycle is a cycle in which two cycles are combined together to get higher overall efficiency. The advantages are, the overall thermal efficiency is increased and the thermal energy is utilized at high temperature.

18. What are the fluids used in the topping cycle of the binary vapour cycle?

Mercury, Sodium, Potassium and mixture of sodium and potassium.

19. What are the disadvantages of mercury as the vapour used in topping cycle?

- Ø The minimum operating temperature of the cycle is very high
- Ø It is highly toxic
- Ø The cost is high
- Ø Economically not attractive due to higher initial cost.

20. Define the unit for refrigeration

Unit of refrigeration is expressed in terms of tonne of refrigeration (TR). A tonne of refrigeration is defined as the quantity of heat required to be removed from one tonne of water at 0°C to convert into ice at 0°C in 24 hours.

21. The doors of a running refrigerator inside a room were left open. What will happen to the room temperature?

The room will gradually warm up.

22. What is dew point temperature?

The temperature at which the vapour starts condensing is called dew point temperature. It is also equal to the saturation temperature at the partial pressure of water vapour in the

mixture. The dew point temperature is an indication of specific humidity.

23. Name the important properties of a good refrigerant.

- a. Low boiling point
- b. High critical temperature
- c. High critical pressure
- d. Low specific heat of liquid
- e. High COP
- f. Non toxic, safe and Eco-friendly.

24. Represent the following psychrometric process using skeleton psychrometric chart?

- a. Cooling and dehumidification
- b. Evaporative cooling.

25. Define Relative humidity.

It is defined as the ratio of partial pressure of water vapour (p_w) in a mixture to the saturation pressure (p_s) of pure water at the same temperature of mixture.

26. Define specific humidity.

It is defined as the ratio of the mass of water vapour (m_s) in a given volume to the mass of dry air in a given volume (m_a).

27. Define degree of saturation.

It is the ratio of the actual specific humidity and the saturated specific humidity at the same temperature of the mixture.

28. What is meant by dry bulb temperature (DBT)?

The temperature recorded by the thermometer with a dry bulb. The dry bulb thermometer cannot be affected by the moisture present in the air. It is the measure of sensible heat of the air.

29. What is meant by wet bulb temperature (WBT)?

It is the temperature recorded by a thermometer whose bulb is covered with cotton wick (wet) saturated with water. The wet

bulb temperature may be the measure of enthalpy of air. WBT is the lowest temperature recorded by moistened bulb.

30. Define dew point depression.

It is the difference between dry bulb temperature and dew point temperature of air vapour mixture.

31. What is meant by adiabatic saturation temperature (or) thermodynamic wet bulb temperature?

It is the temperature at which the outlet air can be brought into saturation state by passing through the water in the long insulated duct (adiabatic) by the evaporation of water due to latent heat of vapourisation.

32. What is psychrometer?

Psychrometer is an instrument which measures both dry bulb temperature and wet bulb temperature.

33. What is psychrometric chart?

It is the graphical plot with specific humidity and partial pressure of water vapour in y axis and dry bulb temperature along x axis. The specific volume of mixture, wet bulb temperature, relative humidity and enthalpy are the properties appeared in the psychrometric chart.

34. Define sensible heat and latent heat.

Sensible heat is the heat that changes the temperature of the substance when added to it or when abstracted from it. Latent heat is the heat that does not affect the temperature but change of state occurred by adding the heat or by abstracting the heat.

35. What is meant by adiabatic mixing?

The process of mixing two or more stream of air without any heat transfer to the surrounding is known as adiabatic mixing. It is happened in air conditioning system.

36. What are the important psychrometric process?

a. Sensible heating and sensible cooling,

- b. Cooling and dehumidification,
- c. Heating and humidification,
- d. Mixing of air streams,
- e. Chemical dehumidification,
- f. Adiabatic evaporative cooling.

37. What are the assumptions made in Vanderwaal's equation of state?

- a. There is no intermolecular force between particles.
- b. The volume of molecules is negligible in comparison with the gas.

38. Define coefficient of volume expansion.

The coefficient of volume expansion is defined as the change in volume with the change in temperature per unit volume keeping the pressure constant. It is denoted by β .

39. State Helmholtz function.

Helmholtz function is the property of a system and is given by subtracting the product of absolute temperature (T) and entropy (S) from the internal energy (U). Helmholtz function = $U - TS$

40. What are thermodynamic properties?

Thermodynamic properties are pressure (p), temperature (T), volume (V), internal energy (U), enthalpy (H), entropy (S), Helmholtz function (a) and Gibbs function (g).

41. Define throttling process.

When a fluid expands through a minute orifice or slightly opened valve, the process is called as throttling process. During this process, pressure and velocity are reduced.

42. Define Molecular mass.

Molecular mass is defined as the ratio between total mass of the mixture to the total number of moles available in the mixture.

43. Define isothermal compressibility.

Isothermal compressibility is defined as the change in volume with change in pressure per unit volume keeping the temperature constant.

44. Define psychrometry.

The science which deals with the study of behaviour of moist air (mixture of dry air and water vapour) is known as psychrometry.

45. Name few commonly used refrigerants

Ammonia, Carbon dioxide, HFC134a, HCFC22, HC blend, water and R407C

46. What is the function of throttling valve in vapour compression refrigeration?

The function of throttling valve (Expansion valve) is to allow the liquid refrigerant under high pressure and temperature to pass at controlled rate after reducing its pressure and temperature.

47. In a vapour compression system where the lowest and highest temperatures occur?

Lowest temperature: at evaporator inlet

Highest temperature: At compressor outlet

48. Why air cycle refrigeration is more popular in aircraft air-conditioning?

- a. Lower equipment weight
- b. Utilizes the porting of the cabin air

49. What are the merits and demerits of air refrigeration system?

Merits:

- Ø The refrigerant air is cheap and easily available
- Ø There is no danger of fire or toxic effects due to leakages.
- Ø The equipment weight to tonne of refrigeration is low

Demerits:

- Ø The quantity of refrigerant used per of refrigeration is high

Ø The COP of the system is very low

Ø The danger of frosting at the expander valves is more as air contains moisture.

50. What are the various methods to produce refrigeration?

- a. By melting of a solid
- b. By sublimation of solid.
- c. By evaporation of liquid

51. What are the various components in vapour absorption system?

Absorber, Generator, Solution pump and Expansion valve

52. Name some important refrigeration applications

Ice making, food preservation, milk processing, industrial air-conditioning, chemical related industries, medical and surgical aids, oil refining and treatment of metals.

53. Define COP

The performance of a refrigeration system is defined as the ratio of heat absorbed by the refrigerant to the work input to compress the refrigerant in the compressor.

54. Name some different types of refrigeration cycles

- a. Vapour compression refrigeration cycle
- b. Vapour absorption refrigeration cycle
- c. Air refrigeration cycle
- d. Steam jet refrigeration system
- e. Thermo electric refrigeration system

55. What are the components involved in vapour compression refrigeration system?

- Compressor
- Condenser
- Expansion valve
- Evaporator

56. What are the four processes in Air refrigeration cycle?

Isentropic compression: Work is consumed during this process

Reversible constant pressure cooling: Hot air from the compressor is cooled

Reversible adiabatic expansion: pressure at outlet equal to refrigerated space

Reversible constant pressure heating: Heat is removed from the space

57. Why super heating and sub cooling is preferred vapour compression cycle?

Super heating is preferred in practice because it ensures complete vaporisation of the liquid in the evaporator before it enters the compressor. Sub cooling of condensate is preferred because it reduces the vapour percentage after throttling so that refrigeration effect per unit mass is increased.

58. What are the advantages of vapour compression system?

- COP is very high as compared to other systems.
- Different cold temperature can be obtained by changing the evaporator pressure.
- Pressure in the condenser and evaporator results in higher heat transfer co-efficient.
- The system is compact in size

59. What are the advantages and disadvantages of vapour absorption system?

Advantages:

- Ø As there is no moving parts, the operation is quiet and little wear
- Ø Input to the system is mainly heat, which is low grade energy.
- Ø Unlike vapour compression system where COP is not reduced drastically as load increases.
- Ø Suitable for very large capacity (more than 400TR capacity)

Disadvantages:

- Ø Not suitable for low capacity
- Ø More precise equipments are needed
- Ø Very low COP
- Ø High initial cost

60. What is the principle of absorption refrigeration system?

In absorption refrigeration system the vapour is drawn from the evaporator by absorption

into liquid having high affinity for the refrigerant. The refrigerant is expelled from the solution by application of heat and its temperature is also increased. This refrigerant in the vapour form passed to the condenser where heat is rejected and the refrigerant gets liquefied. This liquid again flows to the evaporator at reduced pressure and the cycle is completed.

61. What is the refrigeration effect of the refrigerant?

Refrigeration effect is the total heat removed from the evaporator by the refrigerant. It is called as Tonne of Refrigeration or kW.

62. Define sub cooling and super heating

The process of cooling the liquid refrigerant below its saturation temperature in the condenser is known as sub cooling

The process of heating the vapour above saturation temperature in the evaporator is known as super heating.

63. Compare the vapour compression and vapour absorption refrigeration systems?

Vapour compression system	Vapour absorption system
---------------------------	--------------------------

Electric power is needed to drive the system	
--	--

No need of electric power, only low grade heat energy is required	Wear and tear are more
---	------------------------

Charging of refrigerant is simple	Refrigerant charging is
-----------------------------------	-------------------------

complicated	More chances for leakage
	Less chances for leakage

Performance at part load is poor At part load the performance is good Energy supply is low Energy supply is more Higher COP Lower COP

64. What are the cryogenes normally used?

Oxygen, nitrogen, hydrogen, helium and liquefied natural gas.

65. Mention some important application of cryogenics

Food preservation, Medicine, Heat treatment, Transport refrigeration, superconductivity and space programs.

66. Define COP of refrigeration.

The COP of a refrigeration system is the ratio of net refrigeration effect to the work required to produce the effect.

67. What is the purpose of throttling valve in vapour compression system?

The function of throttling valve is to allow the liquid refrigerant under high pressure and temperature to pass at controlled rate after reducing its pressure and temperature.

68. What is the principle of Joule-Thomson refrigeration system?

Compressed is cooled at constant pressure in the heat exchanger and expanded in a Joule-Thomson valve into an evaporator. During the expansion process partial liquefaction of the gas takes place. In the evaporator the liquid is evaporated by absorbing heat from the space to be refrigerated.

69. What are the difference between refrigeration and air-conditioning?

Refrigeration is the process of providing and maintaining the temperature in the space below atmospheric temperature.

Air conditioning is the process of supplying sufficient volume of clean air containing a specific amount of water vapour and maintaining the predetermined atmospheric condition

with in a selected enclosure.

70. What is the difference between refrigerator and heat pump?

The refrigerator is an equipment used to remove heat continuously from a space and maintain its temperature below that of the atmosphere. A heat pump is an equipment used to supply heat continuously to a space and maintain its temperature above that of the atmosphere.

71. What is the unit of refrigeration?

The capacity of refrigeration is expressed in tonnes of refrigeration (TOR).

1 tonnes of refrigeration = 210 kJ/min (or) = 3.5 kJ/sec (kW)

A tonne of refrigeration is defined as the quantity of heat to be removed in order to form one tonne of ice at 0°C in 24 hours.

72. Define refrigeration effect.

The amount of heat extracted in a given time is known as refrigeration effect.

73. What is the advantage of air refrigeration system?

Ø The refrigeration used is air, is non poisonous, cheap and easily available.

Ø The system is highly reliable.

Ø The system is weight less and less space is required, therefore, air refrigeration is extremely useful for aircraft refrigeration.

Ø Air is non-flammable therefore no risk of fire.

74. What are the disadvantages of air refrigeration?

Ø The COP of the air refrigeration system is low therefore the running cost of the system is high.

Ø Large volume of air is required to handle, to compare with other system. Therefore it requires large compressor and expander.

Ø The freezing of moisture in the air during expansion is liable to choke up the valves.

75. What are the assumptions made for drawing TS diagram of refrigeration system?

Ø The condition of the vapour leaving the compressor is dry saturated.

Ø The compression of vapour in the compressor is isentropic

Ø There is no pressure loss in the system.

Ø The work required to drive the system is equal to the difference between the heat rejected in the condenser and heat absorbed in the evaporator.

76. What are the effects of under cooling?

Ø It increases the refrigeration effect therefore the COP increases.

Ø The mass flow rate of the refrigeration is less than that for the simple saturated cycle.

Ø The reduced mass flow rate reduces the piston displacement per minute.

Ø Power per tones of refrigeration losses due to reduction in mass flow rate.

Ø The increased efficiency may be offset to some extent by the rise in the condenser pressure.

Ø Work input almost remains same.

Ø The heat rejection capacity of the condenser increases.

77. What are the effects of super heating?

Ø Super heating increases the net refrigeration effect, but super heating requires more work input therefore super heating reduces the COP.

Ø No moisture contents in the refrigerant therefore no corrosion in the machine's part.

78. What are the advantages of vapour absorption system over vapour compression system?

- Ø As there is no moving part in the system the operation is quiet and there is very little wearing.
- Ø The maintenance cost is low.
- Ø The system does not depend upon electric power.
- Ø It can be built in capacities well above 1000 tones each.
- Ø At reduced loads the absorption system is almost as efficient as of full load the COP of the compressor system decreases as the load decreases.
- Ø Absorption refrigeration system can operate at reduced evaporator temperature by increasing the steam which is supplied to generator with little decrease in capacity. The capacity of its compression system drops rapidly with lower evaporator temperature.

79. What are the properties of ideal refrigerant?

- Ø It should have low boiling point and low freezing point.
- Ø It must have low specific heat and high latent heat.
- Ø It should have high thermal conductivity to reduce the heat transfer in evaporator and condenser.
- Ø It should have low specific volume to reduce the size of the compressor.
- Ø It should be non-flammable, non-expensive, non-toxic and non-corrosive.
- Ø It should have high critical pressure and temperature to avoid large power requirements.
- Ø It should give high COP to reduce the running cost of the system.
- Ø It must be cheap and must be readily available.

80. What are the advantages of vapour compression system?

- Ø The COP is better, because the cycle using vapour as refrigerant absorbs and rejects heat at constant temperature.
- Ø The expander is eliminated.
- Ø The temperature at which the heat is to be absorbed can be changed conveniently by altering the boiling pressure.
- Ø The transfer co-efficiently is high
- Ø The same refrigerant is used over and over again.

81. Differentiate vapour absorption system and vapour compression system.

Vapour absorption system Vapour compression system

Due to compressor and fan more wear and tear

Only moving part is liquid pump, less wear and tear

Electrical power is essential to operate the system

Electrical power is not essential to operate the system (heat energy is used)

The compressor is used to compress the refrigerant

Compressor is replaced by absorber and generator.

Freon 12, Freon 22, NH₃, Propane, Isobutane – used as refrigerants NH₃ water vapour system, Lithium Bromide water vapour system is used.

Occupies less space. Occupies more space.

Performance is poor at partial loads. Performance is not affected at partial loads.

82. List the important industrial and commercial application of refrigeration.

- Ø Food and milk preservation.
- Ø Ice formation
- Ø Comfort and industrial air conditioning
- Ø Storage of liquid fuels used in rockets.

Ø Treatment of metals and processing in chemical and related industries.

Ø Processing of beverages and transportation of food below freezing.

Ø Medical and surgical aids especially in preserving human bloods and tissues.

Ø Oil refining.

83. How does humidity affect human comfort?

Human beings want to feel comfortable. They want to live in an environment that is neither hot nor cold, neither very humid nor very dry. The desires of human body could not be adopted with high or low humidity. They feel comfortable only when they can freely dissipate their waste heat to the environment.

84. What do you mean by the "Infiltration" in heat load calculations?

The amount of heat load added due to the air entering into the A/c system through small opening in the doors and windows, cracks in the walls etc., are termed as infiltration.

86. Define RSHF.

Room sensible heat factor is defined as the ratio of room sensible heat load to the room total heat load.

87. Define Relative humidity.

It is defined as the ratio of partial pressure of water vapour (p_w) in a mixture to the saturation pressure (p_s) of pure water at the same temperature of mixture.

88. Define specific humidity.

It is defined as the ratio of the mass of water vapour (m_s) in a given volume to the mass of dry air in a given volume (m_a).

89. Define degree of saturation.

It is the ratio of the actual specific humidity and the saturated specific humidity at the same temperature of the mixture.

90. What is dew point temperature?

The temperature at which the vapour starts condensing is called dew point temperature. It is also equal to the saturation temperature at the partial pressure of water vapour in the mixture. The dew point temperature is an indication of specific humidity.

91. Define sensible heat and latent heat.

Sensible heat is the heat that changes the temperature of the substance when added to it or when abstracted from it. Latent heat is the heat that does not affect the temperature but change of state occurred by adding the heat or by abstracting the heat.

92. What are the important psychrometric processes?

- a. Sensible heating and sensible cooling
- b. Cooling and dehumidification
- c. Heating and humidification
- d. Mixing of air streams
- e. Chemical dehumidification
- f. Adiabatic evaporative cooling

93. What is meant by adiabatic mixing?

The process of mixing two or more stream of air without any heat transfer to the surrounding is known as adiabatic mixing. It is happened in air conditioning system.

94. What is meant by dry bulb temperature (DBT)?

The temperature recorded by the thermometer with a dry bulb. The dry bulb thermometer cannot affected by the moisture present in the air. It is the measure of sensible heat of the air.

95. What is meant by wet bulb temperature (WBT)?

It is the temperature recorded by a thermometer whose bulb is covered with cotton wick (wet) saturated with water. The wet bulb temperature may be the measure of enthalpy of air.

WBT is the lowest temperature recorded by moistened bulb.

96. Define dew point depression.

It is the difference between dry bulb temperature and dew poi